


Overview

HP 7500 Switch Series

Product overview

The HP 7500 Switch Series comprises modular, multilayer chassis switches that meet the evolving needs of integrated services networks. The switches can be deployed in multiple network environments, including the enterprise LAN core, aggregation layer, and wiring closet edge. They offer 40GbE connectivity and cost-effective, wire-speed 10GbE ports to safeguard the throughput and bandwidth needed for your mission-critical data and high-speed communications.

A passive backplane, support for load sharing, and redundant management and fabrics help the switch series provide high availability. Moreover, these switches deliver wire-speed L2 and L3 routing services for the most demanding applications with hardware-based IPv4 and IPv6 support.

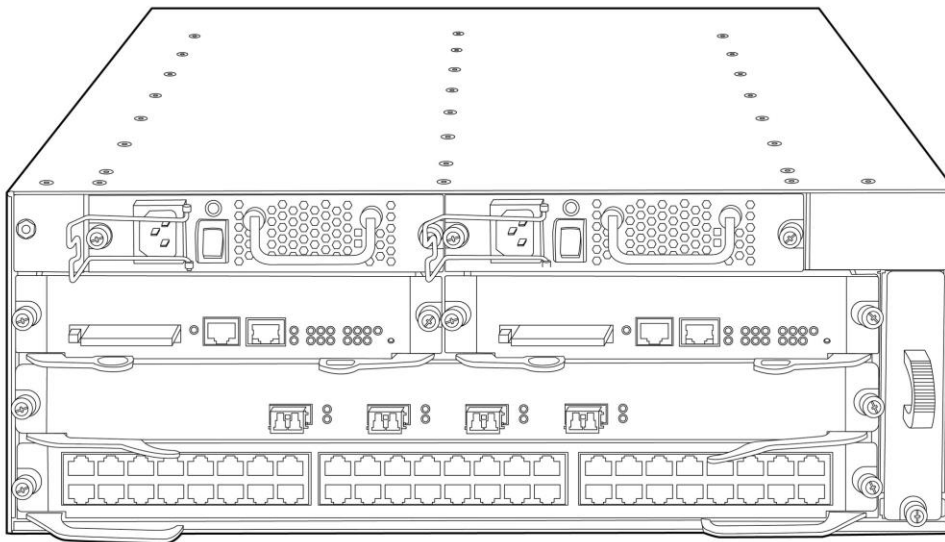

HP 7502 Switch Chassis

Key features

- Versatile, high-performance modular switches
- Enterprise LAN core, aggregation, and edge
- Extensive switching and routing, IPv6, and multiprotocol label switching (MPLS)
- Advanced functionality with service modules
- Robust network and service virtualization

Features and benefits

Quality of Service (QoS)

- **IEEE 802.1p prioritization**
delivers data to devices based on the priority and type of traffic
- **Class of Service (CoS)**
sets the IEEE 802.1p priority tag based on IP address, IP Type of Service (ToS), Layer 3 protocol, TCP/UDP port number, source port, and DiffServ
- **Bandwidth shaping**
 - **Port-based rate limiting**
provides per-port ingress-/egress-enforced increased bandwidth
 - **Classifier-based rate limiting**

Overview

- uses an access control list (ACL) to enforce increased bandwidth for ingress traffic on each port
- **Reduced bandwidth**
 - provides per-port, per-queue egress-based reduced bandwidth
- **Weighted random early detection (WRED)/random early detection (RED)**
 - delivers congestion avoidance capabilities through the use of queue management algorithms
- **Powerful QoS feature**
 - supports the following congestion actions: strict priority (SP) queuing, weighted round robin (WRR), weighted fair queuing (WFQ), and WRED
- **Traffic policing**
 - supports Committed Access Rate (CAR) and line rate

Intrusion detection/prevention system (IDS/IPS)

- **Deep packet inspection**
 - module supports deep packet inspection and examines the packet payload as well as the frame and packet headers; packets are dropped if attacks or intrusions are detected using signature-based or protocol anomaly-based detection
- **Signature-based detection**
 - detects attacks that have known attack patterns; IPS maintains a signature database that contains the pattern definitions for known attacks that can be updated automatically using a subscription service
- **Protocol anomaly-based detection**
 - detects attacks that use anomalies in application protocol payloads
- **Severity-based action policies**
 - involve action taken against attacks based on their severity; available actions are "allow," "block," and "terminate connection" to provide appropriate mitigation
- **Signature update service**
 - provides regular updates to the signature database, helping to ensure that the latest available signatures are installed

Virtual private network (VPN)

- **IPSec**
 - provides secure tunneling over an untrusted network such as the Internet or a wireless network; offers data confidentiality, authenticity, and integrity between two network endpoints
- **Generic Routing Encapsulation (GRE)**
 - transports Layer 2 connectivity over a Layer 3 path in a secured way; enables the segregation of traffic from site to site
- **Manual or automatic Internet Key Exchange (IKE)**
 - provides both manual or automatic key exchange required for the algorithms used in encryption or authentication; auto-IKE allows automated management of the public key exchange, providing the highest levels of encryption

Management

- **Management interface control**
 - provides management access through a modem port and terminal interface, as well as in-band and out-of-band Ethernet ports; provides access through terminal interface, telnet, or secure shell (SSH)
- **Industry-standard CLI with a hierarchical structure**
 - reduces training time and expenses, and increases productivity in multivendor installations
- **Management security**
 - restricts access to critical configuration commands; offers multiple privilege levels with password protection; ACLs provide telnet and SNMP access; local and remote syslog capabilities allow logging of all access
- **SNMPv1, v2, and v3**
 - provide complete support of SNMP; provide full support of industry-standard Management Information Base (MIB) plus private extensions; SNMPv3 supports increased security using encryption
- **sFlow (RFC 3176)**

Overview

provides scalable ASIC-based wirespeed network monitoring and accounting with no impact on network performance; this allows network operators to gather a variety of sophisticated network statistics and information for capacity planning and real-time network monitoring purposes

- **Remote monitoring (RMON)**
uses standard SNMP to monitor essential network functions; supports events, alarm, history, and statistics group plus a private alarm extension group
- **FTP, TFTP, and SFTP support**
offers different mechanisms for configuration updates; FTP allows bidirectional transfers over a TCP/IP network; trivial FTP (TFTP) is a simpler method using User Datagram Protocol (UDP); Secure File Transfer Protocol (SFTP) runs over an SSH tunnel to provide additional security
- **Debug and sampler utility**
supports ping and traceroute for both IPv4 and IPv6
- **Network Time Protocol (NTP)**
synchronizes timekeeping among distributed time servers and clients; keeps timekeeping consistent among all clock-dependent devices within the network so that the devices can provide diverse applications based on the consistent time
- **Network Quality Analyzer (NQA)**
analyzes network performance and service quality by sending test packets, and provides network performance and service quality parameters such as jitter, TCP, or FTP connection delays and file transfer rates; allows a network manager to determine overall network performance and to diagnose and locate network congestion points or failures
- **Information center**
provides a central repository for system and network information; aggregates all logs, traps, and debugging information generated by the system and maintains them in order of severity; outputs the network information to multiple channels based on user-defined rules
- **IEEE 802.1AB Link Layer Discovery Protocol (LLDP)**
advertises and receives management information from adjacent devices on a network, facilitating easy mapping by network management applications
- **Dual flash images**
provides independent primary and secondary operating system files for backup while upgrading
- **Multiple configuration files**
stores easily to the flash image

Connectivity

- **High-density port connectivity**
Provides up to 10 interface module slots and up to 40 40GbE ports, 84 10GbE ports, 480 Fiber Gigabit ports, or 480 PoE-enabled ports per HP 7500 Switch Series system
- **Jumbo frames**
Allow high-performance remote backup and disaster-recovery systems with up to 9,216 bytes
- **Loopback**
supports internal loopback testing for maintenance purposes and an increase in availability; loopback detection protects against incorrect cabling or network configurations and can be enabled on a per-port or per-VLAN basis for added flexibility
- **Ethernet operations, administration and maintenance (OAM)**
detects data link layer problems that occurred in the "last mile" using the IEEE 802.3ah OAM standard; monitors the status of the link between two devices
- **Flexible port selection**
Includes 100/1000BASE-X auto speed selection, 10/100/1000BASE-T auto speed detection, as well as auto duplex and MDI/MDI-X
- **Monitor link**
collects statistics on performance and errors on physical links, increasing system availability
- **IEEE 802.3af Power over Ethernet (PoE)**
provides up to 15.4 W per port to IEEE 802.3af-compliant PoE-powered devices such as IP phones, wireless access points, and security cameras
- **Dual-personality functionality**

Overview

includes four 10/100/1000 ports or SFP slots for optional fiber connectivity such as Gigabit-SX, -LX, and -LH, or 100-FX

- **Packet storm protection**
protects against unknown broadcast, unknown multicast, or unicast storms with user-defined thresholds
- **Flow control**
provides back pressure using standard IEEE 802.3x, reducing congestion in heavy traffic situations
- **IEEE 802.3at Power over Ethernet (PoE+) support**
provides up to 30 watts of power at the power sourcing equipment (PSE)

Performance

- **High-speed fully distributed architecture**
Supports a maximum of 1,152 Gb/s switching capacity with a 2.4 Tb/s backplane, providing enhanced performance and future expansion capability; delivers up to 714 Mp/s throughput with dual fabrics; performs all switching and routing functions in the I/O modules; and meets the current and future demand of an enterprise's bandwidth-intensive applications
- **Scalable system design**
Provides investment protection to support future technologies and higher-speed connectivity with a backplane designed to accommodate bandwidth increases
- **Flexible chassis selection**
Enables you to tailor your product selections to your budget with a choice of six chassis, ranging from a 10-slot to a 2-slot chassis

Resiliency and high availability

- **Redundant/load-sharing fabrics, management, fan assemblies, and power supplies**
increase total performance and power availability while providing hitless, stateful failover
- **All hot-swappable modules**
Allows replacement of modules without any impact on other modules
- **Dual internal power supply**
provides high reliability
- **Separate data and control paths**
separates control from services and keeps service processing isolated; increases security and performance
- **Passive design system**
delivers increased system reliability as the backplane has no active components
- **IEEE 802.3ad link-aggregation control protocol (LACP)**
Supports up to 128 trunks, each with 8 links per trunk; and provides support for static or dynamic groups and a user-selectable hashing algorithm
- **Intelligent Resilient Framework (IRF)**
creates virtual resilient switching fabrics, where two or more switches perform as a single L2 switch and L3 router; switches do not have to be co-located and can be part of a disaster-recovery system; servers or switches can be attached using standard LACP for automatic load balancing and high availability; can eliminate the need for complex protocols like Spanning Tree Protocol, Equal-Cost Multipath (ECMP), or VRRP, thereby simplifying network operation
- **IRF capability**
provides single IP address management for a resilient virtual switching fabric of up to four switches
- **Ring resiliency protection protocol (RRPP)**
Provides standard sub-100 ms recovery for a ring Ethernet-based topology
- **Virtual Router Redundancy Protocol (VRRP)**
allows a group of routers to dynamically back each other up to create highly available routed environments
- **Hitless patch upgrades**
allows patches and new service features to be installed without restarting the equipment, increasing network uptime and facilitating maintenance
- **Graceful restart**
supports graceful restart for OSPF, IS-IS, BGP, LDP, and RSVP; the network remains stable during the active-standby switchover; after the switchover, the device quickly learns the network routes by communicating with adjacent routers;

Overview

forwarding remains uninterrupted during the switchover to achieve nonstop forwarding (NSF)

- **Ultrafast protocol convergence with standards-based failure detection—bidirectional**
Enables link connectivity monitoring and reduces network convergence time for the routing information protocol (RIP), OSPF, BGP, IS-IS, VRRP, MPLS, and IRF
- **Smart link**
allows 50 ms failover between links
- **IP/LDP FRR**
nodes are configured with backup ports, routes, and LSPs; local implementation requires no cooperation of adjacent devices, simplifying the deployment; solves the traditional convergence faults in IP forwarding and MPLS forwarding, protecting the links, nodes, and paths without establishing respective backup LSPs for them; realizes restoration within 50 ms, with the restoration time independent of the number of routes and fast link switchovers, without route convergence

Layer 2 switching

- **VLAN**
Supports up to 4,096 port-based or IEEE 802.1Q-based VLANs; and supports MAC-based VLANs, protocol-based VLANs, and IP-subnet-based VLANs for added flexibility
- **Port isolation**
increases security by isolating ports within a VLAN while still allowing them to communicate with other VLANs
- **Bridge Protocol Data Unit (BPDU) tunneling**
transmits Spanning Tree Protocol BPDUs transparently, allowing correct tree calculations across service providers, WANs, or MANs
- **GARP VLAN Registration Protocol**
allows automatic learning and dynamic assignment of VLANs
- **Port mirroring**
Duplicates port traffic (ingress and egress) to a local or remote monitoring port; and supports four mirroring groups, with an unlimited number of ports per group
- **Spanning Tree Protocol (STP)**
supports standard IEEE 802.1D STP, IEEE 802.1w Rapid Spanning Tree Protocol (RSTP) for faster convergence, and IEEE 802.1s Multiple Spanning Tree Protocol (MSTP)
- **Internet Group Management Protocol (IGMP) and Multicast Listener Discovery (MLD) protocol snooping**
controls and manages the flooding of multicast packets in a Layer 2 network
- **Device Link Detection Protocol (DLDP)**
monitors link connectivity and shuts down ports at both ends if unidirectional traffic is detected, preventing loops in STP-based networks
- **IEEE 802.1ad QinQ and selective QinQ**
increase the scalability of an Ethernet network by providing a hierarchical structure; connect multiple LANs on a high-speed campus or metro network
- **Super VLAN**
Saves IP address space, using RFC 3069 standard (also called VLAN aggregation)
- **Per-VLAN Spanning Tree Plus (PVST+)**
allows each VLAN to build a separate spanning tree to improve link bandwidth usage in network environments with multiple VLANs

Layer 3 services

- **Address Resolution Protocol (ARP)**
determines the MAC address of another IP host in the same subnet; supports static ARPs; gratuitous ARP allows detection of duplicate IP addresses; proxy ARP allows normal ARP operation between subnets or when subnets are separated by a Layer 2 network
- **User Datagram Protocol (UDP) helper**
redirects UDP broadcasts to specific IP subnets to prevent server spoofing

Overview

- **Dynamic Host Configuration Protocol (DHCP)**
simplifies the management of large IP networks and supports client and server; DHCP Relay enables DHCP operation across subnets
- **Domain Name System (DNS)**
provides a distributed database that translates domain names and IP addresses, which simplifies network design; supports client and server

Layer 3 routing

- **Static IPv4 routing**
provides simple manually configured IPv4 routing
- **Routing Information Protocol (RIP)**
uses a distance vector algorithm with UDP packets for route determination; supports RIPv1 and RIPv2 routing; includes loop protection
- **Open shortest path first (OSPF)**
delivers faster convergence; uses this link-state routing Interior Gateway Protocol (IGP), which supports ECMP, NSSA, and MD5 authentication for increased security and graceful restart for faster failure recovery
- **Intermediate system to intermediate system (IS-IS)**
uses a path vector Interior Gateway Protocol (IGP), which is defined by the ISO organization for IS-IS routing and extended by IETF RFC 1195 to operate in both TCP/IP and the OSI reference model (Integrated IS-IS)
- **Border Gateway Protocol 4 (BGP-4)**
delivers an implementation of the Exterior Gateway Protocol (EGP) utilizing path vectors; uses TCP for enhanced reliability for the route discovery process; reduces bandwidth consumption by advertising only incremental updates; supports extensive policies for increased flexibility; scales to very large networks
- **Policy-based routing**
makes routing decisions based on policies set by the network administrator
- **IP performance optimization**
Provides a set of tools to improve the performance of IPv4 networks; and includes directed broadcasts, customization of TCP parameters, support of ICMP error packets, and extensive display capabilities
- **Unicast Reverse Path Forwarding (uRPF)**
limits erroneous or malicious traffic in accordance with RFC 3074
- **Static IPv6 routing**
provides simple manually configured IPv6 routing
- **Dual IP stack**
maintains separate stacks for IPv4 and IPv6 to ease the transition from an IPv4-only network to an IPv6-only network design
- **Routing Information Protocol next generation (RIPng)**
extends RIPv2 to support IPv6 addressing
- **OSPFv3**
provides OSPF support for IPv6
- **IS-IS for IPv6**
extends IS-IS to support IPv6 addressing
- **BGP+**
extends BGP-4 to support Multiprotocol BGP (MBGP), including support for IPv6 addressing
- **IPv6 tunneling**
allows IPv6 packets to traverse IPv4-only networks by encapsulating the IPv6 packet into a standard IPv4 packet; supports manually configured, 6to4, and Intra-Site Automatic Tunnel Addressing Protocol (ISATAP) tunnels; is an important element for the transition from IPv4 to IPv6
- **Multiprotocol Label Switching (MPLS)**
uses BGP to advertise routes across Label Switched Paths (LSPs), but uses simple labels to forward packets from any Layer 2 or Layer 3 protocol, which reduces complexity and increases performance; supports graceful restart for reduced failure impact; supports LSP tunneling and multilevel stacks
- **Multiprotocol Label Switching (MPLS) Layer 3 VPN**
allows Layer 3 VPNs across a provider network; uses MP-BGP to establish private routes for increased security; supports

Overview

- RFC 2547bis multiple autonomous system VPNs for added flexibility
- **Multiprotocol Label Switching (MPLS) Layer 2 VPN**
establishes simple Layer 2 point-to-point VPNs across a provider network using only MPLS Label Distribution Protocol (LDP); requires no routing and therefore decreases complexity, increases performance, and allows VPNs of non-routable protocols; uses no routing information for increased security; supports Circuit Cross Connect (CCC), Static Virtual Circuits (SVCs), Martini draft, and Kompella-draft technologies
- **Virtual Private LAN Service (VPLS)**
establishes point-to-multipoint Layer 2 VPNs across a provider network
- **Service loopback**
allows any module to take advantage of higher-featured modules, including OAA modules, by redirecting traffic; reduces investment and enables higher bandwidth and load sharing; supports IPv6, IPv6 multicast, tunneling, and MPLS

Security

- **Access control list (ACL)**
supports powerful ACLs for both IPv4 and IPv6; ACLs are used for filtering traffic to prevent unauthorized users from accessing the network, or for controlling network traffic to save resources; rules can either deny or permit traffic to be forwarded; rules can be based on a Layer 2 header or a Layer 3 protocol header; rules can be set to operate on specific dates or times
- **Remote Authentication Dial-In User Service (RADIUS)**
eases switch security access administration by using a password authentication server
- **Terminal Access Controller Access-Control System (TACACS+)**
delivers an authentication tool using TCP with encryption of the full authentication request, providing additional security
- **Switch management logon security**
helps secure switch CLI logon by optionally requiring either RADIUS or TACACS+ authentication
- **Secure shell (SSHv2)**
uses external servers to securely log in to a remote device; with authentication and encryption, it protects against IP spoofing and plain-text password interception; increases the security of Secure FTP (SFTP) transfers
- **DHCP snooping**
enables DHCP clients to receive IP addresses from authorized DHCP servers and maintains a list of DHCP entries for trusted ports; prevents users from receiving fake IP addresses and reduces ARP attacks, improving security
- **IP source guard**
filters packets on a per-port basis to prevent illegal packets from being forwarded
- **ARP attack protection**
protects from attacks using a large number of ARP requests with a host-specific, user-selectable threshold
- **Port security**
allows access only to specified MAC addresses, which can be learned or specified by the administrator
- **IEEE 802.1X support**
provides port-based user authentication with support for Extensible Authentication Protocol (EAP) MD5, TLS, TTLS, and PEAP with choice of AES, TKIP, and static or dynamic WEP encryption for protecting wireless traffic between authenticated clients and the access point
- **Media access control (MAC) authentication**
provides simple authentication based on a user's MAC address; supports local or RADIUS-based authentication
- **Multiple user authentication methods**
 - **IEEE 802.1X**
uses an IEEE 802.1X supplicant on the client in conjunction with a RADIUS server to authenticate in accordance with industry standards
 - **Web-based authentication**
provides a browser-based environment, similar to IEEE 802.1X, to authenticate clients that do not support the IEEE 802.1X supplicant
 - **MAC-based authentication**
authenticates the client with the RADIUS server based on the client's MAC address
- **DHCP protection**

Overview

- blocks DHCP packets from unauthorized DHCP servers, preventing denial-of-service attacks
- **Endpoint Admission Defense (EAD)**
provides security policies to users accessing a network
- **Port isolation**
secures and adds privacy, and prevents malicious attackers from obtaining user information

Convergence

- **LLDP-MED (Media Endpoint Discovery)**
defines a standard extension of LLDP that stores values for parameters such as QoS and VLAN to automatically configure network devices such as IP phones
- **Multicast Source Discovery Protocol (MSDP)**
allows multiple PIM-SM domains to interoperate; is used for inter-domain multicast applications
- **Internet Group Management Protocol (IGMP)**
utilizes Any-Source Multicast (ASM) or Source-Specific Multicast (SSM) to manage IPv4 multicast networks; supports IGMPv1, v2, and v3
- **Protocol Independent Multicast (PIM)**
defines modes of Internet IPv4 and IPv6 multicasting to allow one-to-many and many-to-many transmission of information; supports PIM Dense Mode (DM), Sparse Mode (SM), and Source-Specific Mode (SSM)
- **Multicast Border Gateway Protocol (MBGP)**
allows multicast traffic to be forwarded across BGP networks and kept separate from unicast traffic
- **Multicast Listener Discovery (MLD) protocol**
establishes, maintains, and manages IPv6 multicast groups and networks; supports v1 and v2 and utilizes Any-Source Multicast (ASM) or Source-Specific Multicast (SSM)
- **Multicast VLAN**
allows multiple VLANs to receive the same IPv4 or IPv6 multicast traffic, lessening network bandwidth demand by reducing or eliminating multiple streams to each VLAN
- **Voice VLAN**
automatically assigns VLAN and priority for IP phones, simplifying network configuration and maintenance

Integration

- **Open Application Architecture (OAA)**
provides high-performance application-specific modules fully integrated with the switching architecture; uses the chassis high-speed backplane to access network-related data; increases performance, reduces costs, and simplifies network management
- **Local and global server load-balancing module**
Improves traffic distribution using powerful scheduling algorithms, including L4 to L7 services; and monitors the health status of servers and firewalls
- **NetStream module**
Provides traffic analysis and statistics capture to allow network administrators to rapidly identify network anomalies and security threats as well as obtain capacity planning information; and supports NetFlow v5 and v9
- **Unified wired-WLAN module**
Supports up to 1,024 access points per module; can be used with select HP access points (refer to the HP 10500/7500 20G Unified Wired-WLAN Module data sheet for more details); provides N+1, N+N, and 1+1 redundancy with sub-second failovers; offers IPv4/IPv6 and end-to-end QoS; and includes flexible forwarding modes as well as Wi-Fi clear connect radio-frequency optimization and integrated IDS
- **VPN 20 Gb/s firewall module**
Provides enhanced stateful packet inspection and filtering; supports flexible security zones and virtual firewall containment; offers advanced VPN services with 3DES and AES encryption at high performance and low latency; facilitates Web content filtering; and enables application prioritization and optimization

Additional information

Overview

- **Green initiative support**
provides support for RoHS and WEEE regulations
- **Low power-consumption switch**
Is rated among the switches with the lowest power consumption in the industry by Miercom independent tests
- **Unified HP Comware operating system with modular architecture**
Unified HP Comware operating system with modular architecture provides an easy-to-enhance-and-extend feature set, which doesn't require whole-scale changes; all switching, routing, and security platforms leverage the Comware OS, a common unified modular operating system
- **OPEX savings**
simplifies and streamlines deployment, management, and training through the use of a common operating system, thereby cutting costs as well as reducing the risk of human errors associated with having to manage multiple operating systems across different platforms and network layers

Warranty and support

- **1-year Warranty 2.0**
advance hardware replacement with 10-calendar-day delivery (available in most countries)
- **Electronic and telephone support (for Warranty 2.0)**
limited electronic and 24x7 telephone support is available from HP for the entire warranty period; to reach our support centers, refer to www.hp.com/networking/contact-support; for details on the duration of support provided with your product purchase, refer to www.hp.com/networking/warrantysummary
- **Software releases**
to find software for your product, refer to www.hp.com/networking/support; for details on the software releases available with your product purchase, refer to www.hp.com/networking/warrantysummary

Configuration

Build To Order: BTO is a standalone unit with no integration. BTO products ship standalone are not part of a CTO or Rack-Shippable solution.

HP 7502 Switch Chassis JD242B

- Must select min 1 Power Supply
- Must select Min 1 Fabric Module
- 4U - Height

HP 7503 Switch Chassis JD240B

- Must select min 1 Power Supply
- Must select Min 1 Fabric Module
- 10U - Height

HP 7503-S Switch Chassis w/1 Fabric Slot JD243B

- Must select min 1 Power Supply
- Must select Min 1 Fabric Module
- 4U - Height

HP 7503 Swch w/48p GT 2p 10G 384Gbps MPU JG507A

- Must select min 1 Power Supply
- 1 - JD193B - HP 384 Gbps A7500 Fab Mod w/2 XFP Ports included min=0 \ max=2 XFP Transceivers
- 1 - JD229B - HP 48p Gig-T PoE+ Ext A7500 Module included
- 4U - Height

HP 7506 Switch Chassis JD239B

- Must select min 1 Power Supply
- Must select Min 1 Fabric Module
- 13U - Height

HP 7506 Swch w/96p GT 2p 10G 384Gbps MPU JG508A

- Must select min 1 Power Supply
- 1 - JD193B - HP 384 Gbps A7500 Fab Mod w/2 XFP Ports included min=0 \ max=2 XFP Transceivers
- 1 - JD229B - HP 48p Gig-T PoE+ Ext A7500 Module included
- 13U - Height

HP 7506-V Switch Chassis JD241B

- Must select min 1 Power Supply
- Must select Min 1 Fabric Module
- 21U - Height

HP 7510 Switch Chassis JD238B

- Must select min 1 Power Supply

Configuration

- Must select Min 1 Fabric Module
- 16U - Height

HP 7510 Swch w/96p GT 768Gbps MPU

- Must select min 1 Power Supply
- 1 - JD220A - HP 384 Gbps A7500 Fab Mod w/2 XFP Ports included min=0 \ max=2 XFP Transceivers
- 1 - JD229B - HP 48p Gig-T PoE+ Ext A7500 Module included
- 16U - Height

JG509A

Remarks BTO Model 1s should never receive an OD1 and therefore cannot be factory integrated into a rack.

Box Level Integration CTO Models

HP 75xx CTO Switch Solution

- SSP trigger sku

JG707A

HP 7502 Switch Chassis CTO

- Must select min 1 Power Supply
- Must select Min 1 Fabric Module
- 4U - Height

JD242B

See Configuration Note: 2,3

HP 7503 Switch Chassis - CTO

- Must select min 1 Power Supply
- Must select Min 1 Fabric Module
- 10U - Height

JD240B

See Configuration Note: 3,4

HP 7503 Switch Chassis with 1 Fabric Slot - CTO

- Must select min 1 Power Supply
- Must select Min 1 Fabric Module
- 4U - Height

JD243B

See Configuration Note: 2,3

HP 7506 Switch Chassis - CTO

- Must select min 1 Power Supply
- Must select Min 1 Fabric Module
- 13U - Height

JD239B

See Configuration Note: 3,4

HP 7506 Vertical Switch Chassis - CTO

- Must select min 1 Power Supply
- Must select Min 1 Fabric Module
- 21U - Height

JD241B

See Configuration Note: 3,4

Configuration

HP 7510 Switch Chassis - CTO

- Must select min 1 Power Supply
- Must select Min 1 Fabric Module
- 16U - Height

JD238B

See Configuration Note: 3,4

Configuration Rules:

Note 2 If this Switch is selected at least one of these Power Supply with is required: (Use #0D1 if switch is CTO)

HP 7502 300W AC Power Supply

JD226A

HP 7500 650W DC Power Supply

JD209A

HP 7500 650W AC Power Supply

JD217A

Note 3 If the Switch Chassis is to be Box Level Factory Integrated (CTO), Then the #0D1 is required on the Switch Chassis and integrated to the JG707A - HP 7500 CTO Enablement. (Min 1/Max 1 Switch per SSP)

Note 4 If this Switch is selected at least one of these Power Supplies is required: (Use #0D1 if switch is CTO)

HP 7500 1400W DC Power Supply

JD208A

HP 7500 1400W AC Power Supply

JD218A

HP 7500 2800W AC Power Supply

JD219A

HP 7500 6000W AC Power Supply

JD227A

Rack Level Integration CTO Models

HP 7502 Switch Chassis

- Must select min 1 Power Supply
- Must select Min 1 Fabric Module
- 4U - Height

JD242B

See Configuration Note: 1, 3

HP 7503 Switch Chassis

- Must select min 1 Power Supply
- Must select Min 1 Fabric Module
- 10U - Height

JD240B

See Configuration Note: 3,4

HP 7503-S Switch Chassis w/1 Fabric Slot

- Must select min 1 Power Supply
- Must select Min 1 Fabric Module
- 4U - Height

JD243B

See Configuration Note: 1, 3

HP 7506 Switch Chassis

- Must select min 1 Power Supply
- Must select Min 1 Fabric Module
- 13U - Height

JD239B

See Configuration Note: 3,4

Configuration

HP 7506-V Switch Chassis

- Must select min 1 Power Supply
- Must select Min 1 Fabric Module
- 21U - Height

JD241B

See Configuration Note: 3,4

HP 7510 Switch Chassis

- Must select min 1 Power Supply
- Must select Min 1 Fabric Module
- 16U - Height

JD238B

See Configuration Note: 3,4

Configuration rules:

- Note 1** If this Switch is selected at least one of these Power Supply with is required: (Use #0D1 if switch is CTO)
- | | |
|------------------------------|--------|
| HP 7502 300W AC Power Supply | JD226A |
| HP 7500 650W DC Power Supply | JD209A |
| HP 7500 650W AC Power Supply | JD217A |
- Note 3** If HP CTO Switch Chassis is selected to be Rack Level Integration, Then the CTO Switch Chassis needs to integrate (with #0D1) to the BW966A and BW968A HP Universal Rack Only. (Default to the BW966A.)
- Note 4** If this Switch is selected at least one of these Power Supplies is required: (Use #0D1 if switch is CTO)
- | | |
|-------------------------------|--------|
| HP 7500 1400W DC Power Supply | JD208A |
| HP 7500 1400W AC Power Supply | JD218A |
| HP 7500 2800W AC Power Supply | JD219A |
| HP 7500 6000W AC Power Supply | JD227A |

Enter the following menu selections as integrated to the CTO Model X server above if order is factory built.

Internal Power Supplies

- System (std 0 // max 2) User Selection (min 1 // max 2) See Configuration Note:3
- HP 7502 300W AC Power Supply JD226A
- includes 1 x c13, 300w See Configuration Note: 1,4
- PDU Cable NA/MEX/TW/JP #B2B
- C15 PDU Jumper Cord (NA/MEX/TW/JP)
- PDU Cable ROW #B2C
- C15 PDU Jumper Cord (ROW)
- HP 7500 650W DC Power Supply JD209A

Configuration

	See Configuration Note: 1
HP 7500 650W AC Power Supply <ul style="list-style-type: none">includes 1 x c13, 650w	JD217A See Configuration Note: 1,4,5
PDU Cable NA/MEX/TW/JP <ul style="list-style-type: none">C15 PDU Jumper Cord (NA/MEX/TW/JP)	#B2B
PDU Cable ROW <ul style="list-style-type: none">C15 PDU Jumper Cord (ROW)	#B2C
HP 7500 1400W DC Power Supply	JD208A See Configuration Note: 2
HP 7500 1400W AC Power Supply <ul style="list-style-type: none">includes 1 x c19, 1400w	JD218A See Configuration Note: 2,4
PDU Cable NA/MEX/TW/JP <ul style="list-style-type: none">C15 C19 PDU Jumper Cord (NA/MEX/TW/JP)	JD218A#B2B
PDU Cable ROW <ul style="list-style-type: none">C19 PDU Jumper Cord (ROW)	JD218A#B2C
High Volt Switch to Wall Power Cord <ul style="list-style-type: none">NEMA L6-20P Cord (NA/MEX/JP/TW)	JD218A#B2E
HP 7500 2800W AC Power Supply <ul style="list-style-type: none">includes 2 x c19, 2800w	JD219A See Configuration Note: 2,4,6
High Volt Switch to Wall Power Cord <ul style="list-style-type: none">NEMA L6-20P Cord (NA/MEX/JP/TW)	#B2E
HP 7500 6000W AC Power Supply <ul style="list-style-type: none">includes 4 x c19, 6000w	JD227A See Configuration Note: 2,4,6
PDU Cable NA/MEX/TW/JP	JD227A#B2B

Configuration

- C15 C19 PDU Jumper Cord (NA/MEX/TW/JP)

High Volt Switch to Wall Power Cord

JD227A#B2E

- NEMA L6-20P Cord (NA/MEX/JP/TW)

High Volt Switch to Wall Power Cord

#B2E

- NEMA L6-20P Cord (NA/MEX/JP/TW)

Configuration Rules:

- Note 1 Only supported on the JD242x and JD243x.
- Note 2 Only supported on the JD238x, JD239x, JD241x, JD240x, JG507A, JG508A, and JG509A.
- Note 3 If 2 power supplies are selected they must be the same Sku number.
- Note 4 Localization required on orders without #B2B, #B2C, #B2D or #B2E options.
- Note 5 If CTO Switch Chassis is ordered #0D1 (Rack Integrated), Then #B2B, or #B2C is Required on the Power Supply's. (Optional when Switch is not Factory Racked. See Drop down remark in Power Supplies section.)
- Note 6 If the CTO Switch Chassis is ordered #0D1 (Rack Integrated), Then #B2D is Required on the Power Supply's. (Optional when Switch is not Factory Racked. See Drop down remark in Power Supplies section.)

Remarks:

Drop down under power supply should offer the following options and results:
Switch to PDU Power Cord - #B2B in North America, Mexico, Taiwan, and Japan or #B2C ROW. (Watson Default B2B or B2C for Rack Level CTO)
Switch to Wall Power Cord - Localized Option (Watson Default for BTO and Box Level CTO)
High Volt Power Electrical Module to Wall Power Cord - #B2E Option. (Offered only in North America, Mexico, Taiwan, and Japan)

Modules

Ethernet Modules

(Switch JD243x and JD242x) System (std 0 // max 2) User Selection (min 0 // max 2) per enclosure

(Switch JG507A) System (std 1 // max 2) User Selection (min 0 // max 1) per enclosure

(Switch JD240x) System (std 0 // max 3) User Selection (min 0 // max 3) per enclosure

(Switch JD239x and JD241x) System (std 0 // max 6) User Selection (min 0 // max 6) per enclosure

Configuration

(Switch JG508A) System (std 2 // max 6) User Selection (min 0 // max 4) per enclosure

(Switch JD238x) System (std 0 // max 10) User Selection (min 0 // max 10) per enclosure

(Switch JG509A) System (std 2 // max 10) User Selection (min 0 // max 8) per enclosure

HP 7500 24-port GbE SFP Module

- min=0 \ max=24 SFP Transceivers

JD203B

See Configuration
Note:1

HP 7500 12-port GbE SFP SC Module

- min=0 \ max=12 SFP Transceivers

JD207A

See Configuration
Note:1

HP 7500 48-port GbE SFP Enhanced Module

- min=0 \ max=48 SFP Transceivers

JD221A

See Configuration
Note:1

HP 7500 24p GbE SFP w/8 Combo SC Mod

- 16 SFP 100/1000 Mbps ports
- 8 dual-personality ports - 1000M Combo ports (SFP or RJ-45)
- min=0 \ max=24 SFP Transceivers

JD223A

See Configuration
Note:1

HP 7500 40p Gig-T/8p SFP PoE-ready Mod

- min=0 \ max= 8 SFP Transceivers

JD228B

See Configuration
Note:1, 8, 14

HP 7500 24-port GbE SFP Enhanced Module

- min=0 \ max=24 SFP Transceivers

JD231A

See Configuration
Note:1

HP 7500 24p GbE SFP w/8Combo SD Module

- 16 SFP 100/1000 Mbps ports
- 8 dual-personality ports - 1000M Combo ports (SFP or RJ-45)
- min=0 \ max=24 SFP Transceivers

JD234A

See Configuration
Note:1

HP 7500 48-port GbE SFP Extended Module

- min=0 \ max=48 SFP Transceivers

JD237A

See Configuration
Note:1

HP 7500 48-port GbE SFP Module

- min=0 \ max=48 SFP Transceivers

JD211B

See Configuration
Note:1

HP 7500 24-port GbE SFP SC TAA Module

JC704A

Configuration

<ul style="list-style-type: none">min=0 \ max=24 SFP Transceivers	See Configuration Note:1, 9
HP A7500 40p Gig-T/8p SFP PoE SC TAA Mod <ul style="list-style-type: none">min=0 \ max= 8 SFP Transceivers	JC710A See Configuration Note:1, 8, 9, 14
HP A7500 16p GbE SFP/8p Combo EB TAA Mod <ul style="list-style-type: none">min=0 \ max=24 SFP Transceivers	JC715A See Configuration Note:1, 9
HP A7500 16p GbE SFP/8p Combo SD TAA Mod <ul style="list-style-type: none">min=0 \ max=24 SFP Transceivers	JC718A See Configuration Note:1, 9
HP 7500 48-port GbE SFP SD TAA Module <ul style="list-style-type: none">min=0 \ max=48 SFP Transceivers	JC721A See Configuration Note:1, 9
HP A7500 20p Gig-T/4p Cmb PoE-upg SC Mod <ul style="list-style-type: none">min=0 \ max= 4 SFP Transceivers	JC669A See Configuration Note:1, 12
HP 7500 48-port 100BASE-FX Module <ul style="list-style-type: none">min=0 \ max=48 SFP 100 Transceivers	JD197B See Configuration Note:2, 7
HP 7500 8-port 10G SFP+ Module <ul style="list-style-type: none">min=0 \ max=8 per SFP+ Transceivers	JF290A See Configuration Note:3
HP 7500 8-port 10GbE SFP+ SC TAA Module <ul style="list-style-type: none">min=0 \ max=8 per SFP+ Transceivers	JC723A See Configuration Note:3, 9
HP 7500 4-port 10GbE XFP EB Module <ul style="list-style-type: none">min=0 \ max=4 XFP	JD232A See Configuration Note:4
HP 7500 2-port 10GbE XFP Enhanced Module <ul style="list-style-type: none">min=0 \ max=2 XFP	JD233A See Configuration Note:4
HP 7500 8-port 10GbE XFP Extended Module <ul style="list-style-type: none">min=0 \ max=8 XFP Transceivers	JD191A See Configuration Note:4
HP 7500 2-port 10GbE XFP SC Module	JD201A

Configuration

<ul style="list-style-type: none">min=0 \ max=2 XFP Transceivers	See Configuration Note:4
HP 7500 24p Gig-T / 2p 10GbE XFP SC Mod	JD206A
<ul style="list-style-type: none">min=0 \ max=2 XFP Transceivers	See Configuration Note:4
HP 7500 4-port 10GbE XFP Extended Module	JD235A
<ul style="list-style-type: none">min=0 \ max=4 XFP Transceivers	See Configuration Note:4
HP 7500 2-port 10GbE XFP SD Module	JD236A
<ul style="list-style-type: none">min=0 \ max=2 XFP Transceivers	See Configuration Note:4
HP 7500 24p G SFP / 2p 10G XFP SC Mod	JD205A
<ul style="list-style-type: none">min=0 \ max=2 XFP min=0 \ max=24 SFP Transceivers	See Configuration Note:5
HP 7500 24p G w/8Combo / 2p 10G SD Mod	JD230A
<ul style="list-style-type: none">16 SFP 100/1000 Mbps ports8 dual-personality ports - 1000M Combo ports (SFP or RJ-45)2 XFP 10GbE portsmin=0 \ max=2 XFP min=0 \ max=24 SFP Transceivers	See Configuration Note:4, 5
HP 7500 24-port Gig-T SC Module	JD204B
<ul style="list-style-type: none">No supported Transceivers	
HP 7500 48-port Gig-T Module	JD210A
<ul style="list-style-type: none">No supported Transceivers	See Configuration Note:8,14
HP 7500 48p Gig-T PoE+ Extended Module	JD229B
<ul style="list-style-type: none">Includes DIMM	
HP 7500 48p 1000BASE-T PoE+ SC Mod	JG663A
<ul style="list-style-type: none">No supported Transceivers	
HP 7500 48p 1000BASE-T PoE+ SC TAA Mod	JG664A
<ul style="list-style-type: none">No supported Transceivers	
HP 7500 Load Balancing Module	JD252A

Configuration

- No supported Transceivers

HP 7500 NetStream Monitoring Module JD254A

- No supported Transceivers

HP 7500 SSL VPN Module w/500-user Lic JD253A

- No supported Transceivers

HP S1200N IPS A7500 Module JC527A

- No supported Transceivers

HP 7500 48-port 10/100BASE-T Module JD198B
See Configuration Note:7, 8,14

- No supported Transceivers

HP 7500 48-port Gig-T PoE-ready Module JD199B
See Configuration Note:7, 8,14

- min=0 \ max=2 SFP Transceivers

HP 7500 Advanced VPN Firewall Module JD249A
See Configuration Note:13

- min=0 \ max=2 SFP Transceivers

HP 10500/11900/7500 20Gbps VPN FW Mod JG372A
See Configuration Note:13

- min=0 \ max=2 SFP Transceivers

HP 7500 4-port 40GbE QSFP+ SC Module JC792A
See Configuration Note:10

- min=0 \ max=4 QSFP+ Transceivers

HP 7500 4-port 40GbE CFP SC Module JG373A
See Configuration Note:11

- min=0 \ max=4 CFP Transceivers

HP 10500/7500 20G Unified Wired-WLAN Mod JG639A
See Configuration Note:15

- No supported Transceivers

Configuration Rules:

Note 1 The following Transceivers install into this Module: (Use #0D1 if switch is CTO)
HP X170 1G SFP LC LH70 1550 Transceiver JD109A

Configuration

HP X170 1G SFP LC LH70 1570 Transceiver	JD110A
HP X170 1G SFP LC LH70 1590 Transceiver	JD111A
HP X170 1G SFP LC LH70 1610 Transceiver	JD112A
HP X170 1G SFP LC LH70 1470 Transceiver	JD113A
HP X170 1G SFP LC LH70 1490 Transceiver	JD114A
HP X170 1G SFP LC LH70 1510 Transceiver	JD115A
HP X170 1G SFP LC LH70 1530 Transceiver	JD116A
HP X120 1G SFP LC LH100 Transceiver	JD103A
HP X125 1G SFP LC LH40 1310nm Transceiver	JD061A
HP X120 1G SFP LC LH40 1550nm Transceiver	JD062A
HP X125 1G SFP LC LH70 Transceiver	JD063B
HP X120 1G SFP RJ45 T Transceiver	JD089B
HP X120 1G SFP LC SX Transceiver	JD118B
HP X120 1G SFP LC LX Transceiver	JD119B
HP X120 1G SFP LC BX 10-U Transceiver	JD098B
HP X120 1G SFP LC BX 10-D Transceiver	JD099B
HP X110 100M SFP LC LH40 Transceiver	JD090A
HP X110 100M SFP LC LH80 Transceiver	JD091A
HP X115 100M SFP LC FX Transceiver	JD102B
HP X110 100M SFP LC LX Transceiver	JD120B
HP X115 100M SFP LC BX 10-U Transceiver	JD100A
HP X115 100M SFP LC BX 10-D Transceiver	JD101A

Note 2 The following Transceivers install into this Module: (Use #0D1 if switch is CTO)

HP X110 100M SFP LC LH40 Transceiver	JD090A
HP X110 100M SFP LC LH80 Transceiver	JD091A
HP X115 100M SFP LC BX 10-U Transceiver	JD100A
HP X115 100M SFP LC BX 10-D Transceiver	JD101A
HP X115 100M SFP LC FX Transceiver	JD102B
HP X110 100M SFP LC LX Transceiver	JD120B

Note 3 The following Transceivers install into this Module: (Use #0D1 or #B01 if switch is CTO)

HP X130 10G SFP+ LC SR Transceiver	JD092A
HP X130 10G SFP+ LC LRM Transceiver	JD093A
HP X130 10G SFP+ LC LR Transceiver	JD094A
HP X240 10G SFP+ to SFP+ 0.65m Direct Attach Copper Cable	JD095C
HP X240 10G SFP+ to SFP+ 1.2m Direct Attach Copper Cable	JD096C
HP X240 10G SFP+ to SFP+ 3m Direct Attach Copper Cable	JD097C
HP X240 10G SFP+ to SFP+ 5m Direct Attach Copper Cable	JG081C
HP X240 10G SFP+ 7m Direct Attach Copper Cable	

Note 4 The following Transceivers install into this Module: (Use #0D1 if switch is CTO)

HP X135 10G XFP LC ER Transceiver	JD121A
HP X130 10G XFP LC LR Single Mode 10km 1310nm Transceiver	JD108B
HP X130 10G XFP LC SR Transceiver	JD117B
HP X130 10G XFP LC ZR Single Mode 80km 1550nm Transceiver	JD107A
HP X180 10G XFP LC LH 80km 1538.98nm DWDM Transceiver	JG226A
HP X180 10G XFP LC LH 80km 1539.77nm DWDM Transceiver	JG227A
HP X180 10G XFP LC LH 80km 1540.56nm DWDM Transceiver	JG228A

Configuration

HP X180 10G XFP LC LH 80km 1542.14nm DWDM Transceiver	JG229A
HP X180 10G XFP LC LH 80km 1542.94nm DWDM Transceiver	JG230A
HP X180 10G XFP LC LH 80km 1558.98nm DWDM Transceiver	JG231A
HP X180 10G XFP LC LH 80km 1559.79nm DWDM Transceiver	JG232A
HP X180 10G XFP LC LH 80km 1560.61nm DWDM Transceiver	JG233A

Note 5

The following Transceivers install into this Module: (Use #0D1 if switch is CTO)

HP X170 1G SFP LC LH70 1550 Transceiver	JD109A
HP X170 1G SFP LC LH70 1570 Transceiver	JD110A
HP X170 1G SFP LC LH70 1590 Transceiver	JD111A
HP X170 1G SFP LC LH70 1610 Transceiver	JD112A
HP X170 1G SFP LC LH70 1470 Transceiver	JD113A
HP X170 1G SFP LC LH70 1490 Transceiver	JD114A
HP X170 1G SFP LC LH70 1510 Transceiver	JD115A
HP X170 1G SFP LC LH70 1530 Transceiver	JD116A
HP X120 1G SFP LC LH100 Transceiver	JD103A
HP X125 1G SFP LC LH40 1310nm Transceiver	JD061A
HP X120 1G SFP LC LH40 1550nm Transceiver	JD062A
HP X125 1G SFP LC LH70 Transceiver	JD063B
HP X120 1G SFP RJ45 T Transceiver	JD089B
HP X120 1G SFP LC SX Transceiver	JD118B
HP X120 1G SFP LC LX Transceiver	JD119B
HP X120 1G SFP LC BX 10-U Transceiver	JD098B
HP X120 1G SFP LC BX 10-D Transceiver	JD099B
HP X110 100M SFP LC LH40 Transceiver	JD090A
HP X110 100M SFP LC LH80 Transceiver	JD091A
HP X115 100M SFP LC FX Transceiver	JD102B
HP X110 100M SFP LC LX Transceiver	JD120B
HP X135 10G XFP LC ER Transceiver	JD121A
HP X130 10G XFP LC LR Single Mode 10km 1310nm Transceiver	JD108B
HP X130 10G XFP LC SR Transceiver	JD117B
HP X130 10G XFP LC ZR Single Mode 80km 1550nm Transceiver	JD107A

Note 6

The following Transceivers install into this Module: (Use #0D1 if switch is CTO)

HP X170 1G SFP LC LH70 1550 Transceiver	JD109A
HP X170 1G SFP LC LH70 1570 Transceiver	JD110A
HP X170 1G SFP LC LH70 1590 Transceiver	JD111A
HP X170 1G SFP LC LH70 1610 Transceiver	JD112A
HP X170 1G SFP LC LH70 1470 Transceiver	JD113A
HP X170 1G SFP LC LH70 1490 Transceiver	JD114A
HP X170 1G SFP LC LH70 1510 Transceiver	JD115A
HP X170 1G SFP LC LH70 1530 Transceiver	JD116A
HP X120 1G SFP LC LH100 Transceiver	JD103A
HP X125 1G SFP LC LH40 1310nm Transceiver	JD061A
HP X120 1G SFP LC LH40 1550nm Transceiver	JD062A
HP X125 1G SFP LC LH70 Transceiver	JD063B
HP X120 1G SFP RJ45 T Transceiver	JD089B
HP X120 1G SFP LC SX Transceiver	JD118B
HP X120 1G SFP LC LX Transceiver	JD119B

Configuration

HP X120 1G SFP LC BX 10-U Transceiver	JD098B
HP X120 1G SFP LC BX 10-D Transceiver	JD099B
HP X115 100M SFP LC BX 10-U Transceiver	JD100A
HP X115 100M SFP LC BX 10-D Transceiver	JD101A

Note 7 This Module is not supported on the JD242x and JD243x at this time.

Note 8 The following DIMMs install into this Module: (Use #0D1 if switch is CTO)

HP 7500 PoE DIMM Memory Module	JD192B
HP 7500 24-port PoE DIMM	JC671A

Note 10 The following 40G Transceivers install into this switch: (Use #0D1 or #B01 if switch is CTO)

HP X140 40G QSFP+ LC LR4 SM 10km 1310nm Transceiver	JG661A
HP X140 40G QSFP+ MPO SR4 Transceiver	JG325B
HP X140 40G QSFP+ MPO MM 850nm CSR4 300m Transceiver	JG709A
HP X240 40G QSFP+ QSFP+ 1m Direct Attach Copper Cable	JG326A
HP X240 40G QSFP+ QSFP+ 3m Direct Attach Copper Cable	JG327A
HP X240 40G QSFP+ QSFP+ 5m Direct Attach Copper Cable	JG328A
HP X240 40G QSFP+ to 4x10G SFP+ 1m Direct Attach Copper Splitter Cable	JG329A
HP X240 40G QSFP+ to 4x10G SFP+ 3m Direct Attach Copper Splitter Cable	JG330A
HP X240 40G QSFP+ to 4x10G SFP+ 5m Direct Attach Copper Splitter Cable	JG331A

Note 11 The following CFP Transceivers install into this switch:

HP X140 40G CFP LC LR4 10km SM Transceiver	JC857A
--	--------

Note 12 The following PoE DIMM installs into this Module: (Use #0D1 if switch is CTO)
The JC671A - HP A7500 24-port PoE DIMM (must be installed to enable PoE on the these modules)

Note 13

HP X125 1G SFP LC LH40 1310nm Transceiver	JD061A
HP X120 1G SFP LC LH40 1550nm Transceiver	JD062A
HP X125 1G SFP LC LH70 Transceiver	JD063B
HP X120 1G SFP LC SX Transceiver	JD118B
HP X120 1G SFP LC LX Transceiver	JD119B

Note 14 The following PoE DIMM installs into this Module: (Use #0D1 if switch is CTO)
JD192B - HP 7500 PoE DIMM Module (must be installed to enable PoE on the these modules)

Note 15 Maximum of this Module per Chassis:

- JD238B min=0\max=9 per Chassis
- JG509A min=0\max=7 per Chassis
- JD239B, JD241B min=0\max=5 per Chassis
- JG508A min=0\max=3 per Chassis
- JD240B, JD243B min=0\max=2 per Chassis
- JD242B, JG507A min=0\max=1 per Chassis

There are no restrictions on which slots these modules may go in.

Remark JD253A - Additional User licenses available below in the 'Switch Enclosure Options' category.
JG639A and JG645A - Additional AP licenses available below in the 'Switch Enclosure

Configuration

[Options' category.](#)

Fabric Modules

System (std 0 // max 2) User Selection (min 1 // max 2) per enclosure	See Configuration Note:3, 12
JG507A, JG508A and JG509A only System (std 1 // max 2) User Selection (min 0 // max 1) per enclosure	See Configuration Note:3, 12
HP 7500 384Gbps Fab Mod w/2 XFP Ports <ul style="list-style-type: none">min=0 \ max=2 XFP Transceivers	JD193B See Configuration Note:1, 4
HP 7500 384Gbps Fabric Module <ul style="list-style-type: none">No supported Transceivers	JD194B See Configuration Note:1
HP 7500 384Gbps Fab Mod w/12 SFP Ports <ul style="list-style-type: none">min=0 \ max=12 SFP Transceivers	JD224A See Configuration Note:1, 5
HP 7500 384Gbps Advanced Fabric Module <ul style="list-style-type: none">No supported Transceivers	JD195A See Configuration Note:1
HP 7500 384Gbps Lite Fabric Module <ul style="list-style-type: none">No supported Transceivers	JF219B See Configuration Note:1
HP 7500 768Gbps Fabric Module <ul style="list-style-type: none">No supported Transceivers	JD220A See Configuration Note:11
HP 7502 Fabric Module <ul style="list-style-type: none">No supported Transceivers	JD196A See Configuration Note:10
HP 7503 Fabric Module with 24 GbE Ports <ul style="list-style-type: none">min=0 \ max=24 SFP Transceivers	JD222A See Configuration Note:2, 5
HP A7503-S 144 Gbps Fab/MPU w 24p Gig-T <ul style="list-style-type: none">min=0 \ max=4 SFP Transceivers	JC666A See Configuration Note:2, 5,13

Configuration Rules:

Note 1 [These Modules install to the following switches: \(Use #0D1 if switch is CTO\)](#)

Configuration

HP A7503 Switch Chassis	JD240x
HP A7506 Switch Chassis	JD239x
HP 7506 Switch with 2 48-port Gig-T PoE+ Modules and 384Gbps MPU with 2 XFP ports	JG508A
HP A7506 Vertical Switch Chassis	JD241x
HP A7510 Switch Chassis	JD238x
HP 7510 Switch with 2 48-port Gig-T PoE+ Modules and 768Gbps MPU	JG509A

Note 2	These Modules install to the following switches only: (Use #0D1 if switch is CTO)	
	HP A7503 Switch Chassis with 1 Fabric Slot	JD243x
	HP 7503 Switch with 48-port Gig-T PoE+ Module and 384Gbps MPU with 2 XFP ports	JG507A

Note 3 If JD243x or JG507A is selected then Max = 1.

Note 4	The following Transceivers install into this Module: (Use #0D1 if switch is CTO)	
	HP X135 10G XFP LC ER Transceiver	JD121A
	HP X130 10G XFP LC LR Single Mode 10km 1310nm Transceiver	JD108B
	HP X130 10G XFP LC SR Transceiver	JD117B
	HP X130 10G XFP LC ZR Single Mode 80km 1550nm Transceiver	JD107A
	HP X180 10G XFP LC LH 80km 1538.98nm DWDM Transceiver	JG226A
	HP X180 10G XFP LC LH 80km 1539.77nm DWDM Transceiver	JG227A
	HP X180 10G XFP LC LH 80km 1540.56nm DWDM Transceiver	JG228A
	HP X180 10G XFP LC LH 80km 1542.14nm DWDM Transceiver	JG229A
	HP X180 10G XFP LC LH 80km 1542.94nm DWDM Transceiver	JG230A
	HP X180 10G XFP LC LH 80km 1558.98nm DWDM Transceiver	JG231A
	HP X180 10G XFP LC LH 80km 1559.79nm DWDM Transceiver	JG232A
	HP X180 10G XFP LC LH 80km 1560.61nm DWDM Transceiver	JG233A

Note 5	The following Transceivers install into this Module: (Use #0D1 if switch is CTO)	
	HP X170 1G SFP LC LH70 1550 Transceiver	JD109A
	HP X170 1G SFP LC LH70 1570 Transceiver	JD110A
	HP X170 1G SFP LC LH70 1590 Transceiver	JD111A
	HP X170 1G SFP LC LH70 1610 Transceiver	JD112A
	HP X170 1G SFP LC LH70 1470 Transceiver	JD113A
	HP X170 1G SFP LC LH70 1490 Transceiver	JD114A
	HP X170 1G SFP LC LH70 1510 Transceiver	JD115A
	HP X170 1G SFP LC LH70 1530 Transceiver	JD116A
	HP X120 1G SFP LC LH100 Transceiver	JD103A
	HP X125 1G SFP LC LH40 1310nm Transceiver	JD061A
	HP X120 1G SFP LC LH40 1550nm Transceiver	JD062A
	HP X125 1G SFP LC LH70 Transceiver	JD063B
	HP X120 1G SFP RJ45 T Transceiver	JD089B
	HP X120 1G SFP LC SX Transceiver	JD118B
	HP X120 1G SFP LC LX Transceiver	JD119B
	HP X120 1G SFP LC BX 10-U Transceiver	JD098B
	HP X120 1G SFP LC BX 10-D Transceiver	JD099B
	HP X110 100M SFP LC LH40 Transceiver	JD090A
	HP X110 100M SFP LC LH80 Transceiver	JD091A
	HP X115 100M SFP LC FX Transceiver	JD102B
	HP X110 100M SFP LC LX Transceiver	JD120B

Configuration

	HP X115 100M SFP LC BX 10-U Transceiver	JD100A
	HP X115 100M SFP LC BX 10-D Transceiver	JD101A
Note 10	These Modules install to the following switches only: (Use #0D1 if switch is CTO) HP A7502 Switch Chassis	JD242x
Note 11	These Modules install to the following switches only: (Use #0D1 if switch is CTO) HP A7510 Switch Chassis HP 7510 Switch with 2 48-port Gig-T PoE+ Modules and 768Gbps MPU	JD238x JG509A
Note 12	If 2 Fabric Modules are selected they must be the same Sku number.	
Note 13	The following PoE DIMM installs into this Module: (Use #0D1 if switch is CTO) The JC671A - HP A7500 24-port PoE DIMM (must be installed to enable PoE on the these modules)	
Remarks:	For Switch A7503,A7506 and A7506-V, these modules can only be inserted into the Slot 0 and Slot 1. And for Switch A7510, this module can only be inserted into the Slot 5 and Slot 6. For Switch A7503-S, this module can only be inserted into the Slot 0.	

A7500 PoE Module

System (std 0 // max 1) User Selection (min 0 // max 1) per Ethernet or Fabric Module

HP 7500 PoE DIMM Module	JD192B See Configuration Note:1, 3, 5, 6
HP A7500 24-port PoE DIMM	JC671A See Configuration Note:2, 4, 5, 6

Configuration Rules:

Note 1	The JD192B is optional when you have selected the JD199B, JD198B, JD210A, JC709A, JC710A or JD228B modules.
Note 2	If this DIMM is selected at least one JD219A - HP A7500 2800W AC Power Supply is required. (Except for JD242x, and JD243x, see rule 6)
Note 3	If 1 or more of the JD192B (PoE DIMM Module) is ordered than the customer must also order 2 of JD208A, JD218A, JD219A, or JD227A in order to support PoE. (Except for JD242x, and JD243x, see rule 6)
Note 4	The JC671A is optional when you have selected the JC666A, JC669A or JC668A modules.
Note 5	This Module is not supported on JG507A at this time.

Configuration

Note 6 This Module is supported on the JD242x, and JD243x only when an External DC Power Source is connected to the rear terminals. (See Installation Guide)

Transceivers

SFP+ Transceivers

HP X130 10G SFP+ LC SR Transceiver	JD092B
HP X130 10G SFP+ LC LRM Transceiver	JD093B
HP X130 10G SFP+ LC LR Transceiver	JD094B
HP X240 10G SFP+ SFP+ 0.65m Direct Attach Copper Cable	JD095C#B01
HP X240 10G SFP+ SFP+ 1.2m Direct Attach Copper Cable	JD096C#B01
HP X240 10G SFP+ SFP+ 3m Direct Attach Copper Cable	JD097C#B01
HP X240 10G SFP+ SFP+ 5m Direct Attach Copper Cable	JG081C#B01
HP X240 10G SFP+ 7m Direct Attach Copper Cable	JC784C#B01

SFP Transceivers

HP X170 1G SFP LC LH70 1550 Transceiver	JD109A
HP X170 1G SFP LC LH70 1570 Transceiver	JD110A
HP X170 1G SFP LC LH70 1590 Transceiver	JD111A
HP X170 1G SFP LC LH70 1610 Transceiver	JD112A
HP X170 1G SFP LC LH70 1470 Transceiver	JD113A
HP X170 1G SFP LC LH70 1490 Transceiver	JD114A
HP X170 1G SFP LC LH70 1510 Transceiver	JD115A
HP X170 1G SFP LC LH70 1530 Transceiver	JD116A
HP X120 1G SFP LC LH100 Transceiver	JD103A
HP X125 1G SFP LC LH40 1310nm XCVR	JD061A
HP X120 1G SFP LC LH40 1550nm XCVR	JD062A
HP X120 1G SFP RJ45 T Transceiver	JD089B
HP X120 1G SFP LC SX Transceiver	JD118B
HP X120 1G SFP LC LX Transceiver	JD119B
HP X125 1G SFP LC LH70 Transceiver	JD063B
HP X120 1G SFP LC BX 10-U Transceiver	JD098B
HP X120 1G SFP LC BX 10-D Transceiver	JD099B
HP X110 100M SFP LC LH40 Transceiver	JD090A
HP X110 100M SFP LC LH80 Transceiver	JD091A
HP X115 100M SFP LC FX Transceiver	JD102B
HP X110 100M SFP LC LX Transceiver	JD120B
HP X110 100M SFP LC BX 10-U Transceiver	JD100A
HP X110 100M SFP LC BX 10-D Transceiver	JD101A

XFP Transceivers

HP X135 10G XFP LC ER Transceiver	JD121A
HP X130 10G XFP LC ZR 1550nm Transceiver	JD107A
HP X130 10G XFP LC SR Transceiver	JD117B
HP X130 10G XFP LC LR 1310nm Transceiver	JD108B
HP X180 10G XFP LC 1538.98 DWDM Xcvr	JG226A

Configuration

HP X180 10G XFP LC 1539.77 DWDM Xcvr	JG227A
HP X180 10G XFP LC 1540.56 DWDM Xcvr	JG228A
HP X180 10G XFP LC 1542.14 DWDM Xcvr	JG229A
HP X180 10G XFP LC 1542.94 DWDM Xcvr	JG230A
HP X180 10G XFP LC 1558.98 DWDM Xcv	JG231A
HP X180 10G XFP LC 1559.79 DWDM Xcvr	JG232A
HP X180 10G XFP LC 1560.61 DWDM Xcvr	JG233A

QSFP+ Transceivers

HP X140 40G QSFP+ LC LR4 SM XCVR	JG661A
HP X140 40G QSFP+ MPO SR4 XCVR	JG325B
HP X140 40G QSFP+ CSR4 300m XCVR	JG709A
HP X240 40G QSFP+ QSFP+ 1m Direct Attach Copper Cable	JG326A#B01
HP X240 40G QSFP+ QSFP+ 3m Direct Attach Copper Cable	JG327A#B01
HP X240 40G QSFP+ QSFP+ 5m Direct Attach Copper Cable	JG328A#B01
HP X240 QSFP+ 4x10G SFP+ 1m Direct Attach Copper Cable	JG329A#B01
HP X240 QSFP+ 4x10G SFP+ 3m Direct Attach Copper Cable	JG330A#B01
HP X240 QSFP+ 4x10G SFP+ 5m Direct Attach Copper Cable	JG331A#B01

CFP Transceivers

HP X140 40G CFP LC LR4 10km SM Transceiver	JC857A
--	--------

Switch Enclosure Options

Software Licenses

HP 10500/7500 Wrd-WLAN Mod 128 AP E-LTU	JG649AAE
<ul style="list-style-type: none"> (min 0 // max 7) 	See
REMARK: This license is for use with the Redundant Controllers.	Configuration
	Note:1
HP Unified Wired-WLAN 128 AP Redundant E-LTU	JG902AAE
<ul style="list-style-type: none"> (min 0 // max 7) 	See
REMARK: This license is for use with the Redundant Controllers.	Configuration
	Note:1

Configuration Rules:

Note 1 Only supported on JG639A and JG645A.

Compact Flash cards

System (std 0 // max 1) User Selection (min 0 // max 1)

HP X600 1G Compact Flash Card	JC684A
	See

Configuration

	Configuration Note:1
HP X600 512M Compact Flash Card	JC685A See Configuration Note:1
HP X600 256M Compact Flash Card	JC686A See Configuration Note:1

Configuration Rules:

Note 1	<p>These CF Cards are supported on the following Modules only:</p> <p>HP 7502 Fabric Module JD196A</p> <p>HP 7500 384Gbps Fabric Module with 2 XFP Ports JD193B</p> <p>HP 7500 384Gbps Fabric Module JD194B</p> <p>HP 7500 768Gbps Fabric Module JD220A</p> <p>HP 7500 384Gbps Advanced Fabric Module JD195A</p> <p>HP 7500 384Gbps Lite Fabric Module JF219B</p> <p>HP 7500 384Gbps Fabric Module with 12 SFP Ports JD224A</p> <p>HP 7502 TAA-compliant Main Processing Unit JC697A</p> <p>HP 7500 384Gbps TAA-compliant Fabric / MPU with 2 10GbE XFP Ports JC699A</p> <p>HP 7500 384Gbps TAA-compliant Fabric / Main Processing Unit JC700A</p> <p>HP 7500 768Gbps TAA-compliant Fabric / Main Processing Unit JC701A</p> <p>HP 7503-S 144Gbps Fabric/MPU with PoE Upgradable 20-port Gig-T/4-port GbE Combo JC666A</p> <p>HP 9500 VPN Firewall Module JD245A</p>
--------	---

Options for the SSL VPN Service Board Modules (JD253x)

HP 7500 SSL VPN 1000-user License	JD257A
<ul style="list-style-type: none"> min=0\ max=10 per SSL 	See Configuration Note:1
HP 7500 SSL VPN 1000-user License	JD257AAE
<ul style="list-style-type: none"> min=0\ max=10 per SSL 	See Configuration Note:1

Configuration Rules:

Note 1	Any mixture of (JD257A) that equals 10,000 LTU's is the max per any JD253A module the maximum would be based on the module and not the entire switch.
--------	---

Options for the S1200N IPS A7500 Module (JC527A)

System (std 0 // max - no limit) User Selection (min 0 // max - no limit) per S1200N IPS A7500 Module

Configuration

HP A7500 S1200N 1-y Rep DV Subsc Svc

JC592A
See
Configuration
Note:1

HP A7500 S1200N 3-y Rep DV Subsc Svc

JC593A
See
Configuration
Note:1

Configuration Rules:

Note 1 If any DV Subsc Svc is selected #0D1, it must be integrated to one of the following modules:
JC527A - HP S1200N IPS A7500 Module

Spare Fan Assembly

HP 7502 Spare Fan Assembly

JD213A

HP 7503 Spare Fan Assembly

JD212A

HP 7506 Spare Fan Assembly

JD214A

HP 7506-V Spare Fan Assembly

JD215A

HP 7510 Spare Fan Assembly

JD216A

HP 7503-S Spare Fan Assembly

JC672A

Remarks:

JD213A - This item is only used to replace the fan module of an A7502 . A host is delivered with the fan module.

JD212A - This item is only used to replace the fan module of an A7503. A host is delivered with the fan module.

JD214A - This item is only used to replace the fan module of an A7506. A host is delivered with the fan module.

JD215A - This item is only used to replace the fan module of an A7506-V. A host is delivered with the fan module.

JD216A - This item is only used to replace the fan module of an A7510. A host is delivered with the fan module.

JC672A - This item is only used to replace the fan module of an A7503-S. A host is delivered with the fan module.

Opacity Shield Kit

System (std 0 // max 1) User Selection (min 0 // max 1)

HP 7510 Opcty Shld Kit

JG565A

NOTE:



Configuration

Supported on JD238B

HP 7506 Opcty Shld Kit

JG566A

NOTE:

Supported on JD239B, JD241B

HP 7503 Opcty Shld Kit

JG568A

NOTE:

Supported on JD240B, JD243B

Tamper Evidence Labels

HP 12mm x 60mm Tmpr-Evidence (100) Lbl

JG586A

NOTE:

Supported on JG565A, JG566A or JG568A

Remarks: Each JG565A, JG566A or JG568A would use 1 of JG586A.

Technical Specifications

HP 7510 Switch Chassis (JD238B)

Included accessories	1 HP 7510 Spare Fan Assembly (JD216A)	
I/O ports and slots	10 I/O module slots Supports a maximum of 84 10GbE ports or 480 autosensing 10/100/1000 ports or 480 SFP ports or 40 40GbE ports, or a combination	
Additional ports and slots	2 switch fabric slots	
Power supplies	2 power-supply slots 1 minimum power-supply required (ordered separately)	
Fan tray	includes: 1 x JD216A 1 fan tray slot	
Physical characteristics	Dimensions	17.17(w) x 16.54(d) x 27.87(h) in (43.6 x 42.0 x 70.8 cm) (16U height)
	Weight	211 lb (95.71 kg), Fully loaded chassis, two fabrics, two power supplies, and a full complement of typical I/O modules
Memory and processor	Fabric	MIPS64 @ 600 MHz, 64 MB flash, 512 MB RAM
	I/O Module	MIPS64 @ 400 MHz, 512 MB RAM
Mounting	Mounts in an EIA-standard 19 in. rack or other equipment cabinet (hardware included); horizontal surface mounting only	
Performance	Throughput	714 million pps
	Routing/Switching capacity	1152 Gb/s
	Routing table size	256000 entries (IPv4), 8000 entries (IPv6)
	MAC address table size	512000 entries
Reliability	Availability	99.999%
Environment	Operating temperature	32°F to 113°F (0°C to 45°C)
	Operating relative humidity	10% to 95%, non-condensing
	Nonoperating/Storage temperature	-40°F to 158°F (-40°C to 70°C)
	Nonoperating/Storage relative humidity	5% to 95%, non-condensing
	Acoustic	Low-speed fan: 53.5 dB, High-speed fan: 56.7 dB
Electrical characteristics	Frequency	50 / 60 Hz
	AC Voltage	100-120 / 200-240 VAC
	Current	16/50 A
	Power output	1400 W
	Notes	Based on a common power supply of 1400 W (AC/DC)
Safety	UL 60950-1; IEC 60950-1; CAN/CSA-C22.2 No. 60950-1; EN 60950-1/A11	
Emissions	VCCI Class A EN 55022 Class A ICES-003 Class A ANSI C63.4 2003 AS/NZS CISPR 22 Class A EN 61000-3-2:2006 EN 61000-3-3:1995 +A1:2001+A2:2005 EMC Directive 2004/108/EC FCC (CFR 47, Part 15) Class A	

Technical Specifications

Immunity	<p>Generic ETSI EN 300 386 V1.3.3</p> <p>EN EN 61000-4-2:1995+A1:1998+A2:2001</p> <p>ESD EN 61000-4-2</p> <p>Radiated EN 61000-4-3</p> <p>EFT/Burst EN 61000-4-4</p> <p>Surge EN 61000-4-5</p> <p>Conducted EN 61000-4-6</p> <p>Power frequency magnetic field IEC 61000-4-8</p> <p>Voltage dips and interruptions EN 61000-4-11</p> <p>Harmonics EN 61000-3-2, IEC 61000-3-2</p> <p>Flicker EN 61000-3-3, IEC 61000-3-3</p>
Management	IMC - Intelligent Management Center; command-line interface; Web browser; out-of-band management (serial RS-232C); SNMP Manager; Telnet; terminal interface (serial RS-232C); modem interface; IEEE 802.3 Ethernet MIB; Ethernet Interface MIB
Notes	<p>For non-TAA environments, IPS/IDS functionality is provided by the HP S1200E IPS 7500 Module (JC527A).</p> <p>For non-TAA environments, IKE/IPSec functionality is provided by the HP 7500 VPN Firewall Module (JD249A).</p> <p>IRF functionality is not supported on HP 7502 and 7503-S Switch Chassis.</p>
Services	<p>3-year, parts only, global next-day advance exchange (HP781E)</p> <p>3-year, 4-hour onsite, 13x5 coverage for hardware (HP782E)</p> <p>3-year, 4-hour onsite, 24x7 coverage for hardware (HP785E)</p> <p>3-year, 4-hour onsite, 24x7 coverage for hardware, 24x7 software phone support (HP788E)</p> <p>3-year, 24x7 SW phone support, software updates (HP791E)</p> <p>1-year, post-warranty, 4-hour onsite, 24x7 coverage for hardware, 24x7 software phone support (HR511E)</p> <p>Installation with minimum configuration, system-based pricing (UX032E)</p> <p>4-year, 4-hour onsite, 13x5 coverage for hardware (HP783E)</p> <p>4-year, 4-hour onsite, 24x7 coverage for hardware (HP786E)</p> <p>4-year, 4-hour onsite, 24x7 coverage for hardware, 24x7 software phone (HP789E)</p> <p>4-year, 24x7 SW phone support, software updates (HP792E)</p> <p>5-year, 4-hour onsite, 13x5 coverage for hardware (HP784E)</p> <p>5-year, 4-hour onsite, 24x7 coverage for hardware (HP787E)</p> <p>5-year, 4-hour onsite, 24x7 coverage for hardware, 24x7 software phone (HP790E)</p> <p>5-year, 24x7 SW phone support, software updates (HP793E)</p> <p>3 Yr 6 hr Call-to-Repair Onsite (HP795E)</p> <p>3 Yr 6 hr Call-to-Repair Onsite (HP794E)</p> <p>5 Yr 6 hr Call-to-Repair Onsite (HP796E)</p> <p>1-year, 4-hour onsite, 13x5 coverage for hardware (HR509E)</p> <p>1-year, 4-hour onsite, 24x7 coverage for hardware (HR510E)</p> <p>1-year, 6 hour Call-To-Repair Onsite for hardware (HR513E)</p> <p>1-year, 24x7 software phone support, software updates (HR512E)</p> <p>Refer to the HP website at: www.hp.com/networking/services for details on the service-level descriptions and product numbers. For details about services and response times in your area, please contact your local HP sales office.</p>

HP 7506-V Switch Chassis (JD241B)

Included accessories	1 HP 7506-V Spare Fan Assembly (JD215A)
I/O ports and slots	6 I/O module slots

Technical Specifications

	Supports a maximum of 52 10GbE ports or 288 autosensing 10/100/1000 ports or 288 SFP ports or 24 40GbE ports, or a combination	
Additional ports and slots	2 switch fabric slots	
Power supplies	2 power-supply slots 1 minimum power-supply required (ordered separately)	
Fan tray	includes: 1 x JD215A 1 fan tray slot	
Physical characteristics	Dimensions	17.17(w) x 16.54(d) x 36.61(h) in (43.6 x 42.0 x 93.0 cm) (21U height)
	Weight	222 lb (100.7 kg), Fully loaded chassis, two fabrics, two power supplies, and a full complement of typical I/O modules
Memory and processor	Fabric	MIPS64 @ 600 MHz, 64 MB flash, 512 MB RAM
	I/O Module	MIPS64 @ 400 MHz, 512 MB RAM
Mounting	Mounts in an EIA-standard 19 in. rack or other equipment cabinet (hardware included); horizontal surface mounting only	
Performance	Throughput	488 million pps
	Routing/Switching capacity	768 Gb/s
	Routing table size	256000 entries (IPv4), 8000 entries (IPv6)
	MAC address table size	512000 entries
Reliability	Availability	99.999%
Environment	Operating temperature	32°F to 113°F (0°C to 45°C)
	Operating relative humidity	10% to 95%, non-condensing
	Nonoperating/Storage temperature	-40°F to 158°F (-40°C to 70°C)
	Nonoperating/Storage relative humidity	5% to 95%, non-condensing
	Acoustic	Low-speed fan: 52.1 dB, High-speed fan: 56.2 dB
Electrical characteristics	Frequency	50/60 Hz
	AC Voltage	100-120 / 200-240 VAC
	Current	16/50 A
	Power output	1400 W
	Notes	Based on a common power supply of 1400 W (AC/DC)
Safety	UL 60950-1; IEC 60950-1; CAN/CSA-C22.2 No. 60950-1; EN 60950-1/A11	
Emissions	VCCI Class A EN 55022 Class A ICES-003 Class A ANSI C63.4 2003 AS/NZS CISPR 22 Class A EN 61000-3-2:2006 EN 61000-3-3:1995 +A1:2001+A2:2005 EMC Directive 2004/108/EC FCC (CFR 47, Part 15) Class A	
Immunity	Generic	ETSI EN 300 386 V1.3.3
	EN	EN 61000-4-2:1995+A1:1998+A2:2001
	ESD	EN 61000-4-2
	Radiated	EN 61000-4-3

Technical Specifications

EFT/Burst	EN 61000-4-4
Surge	EN 61000-4-5
Conducted	EN 61000-4-6
Power frequency magnetic field	IEC 61000-4-8
Voltage dips and interruptions	EN 61000-4-11
Harmonics	EN 61000-3-2, IEC 61000-3-2
Flicker	EN 61000-3-3, IEC 61000-3-3

Management IMC - Intelligent Management Center; command-line interface; Web browser; out-of-band management (serial RS-232C); SNMP Manager; Telnet; terminal interface (serial RS-232C); modem interface; IEEE 802.3 Ethernet MIB; Ethernet Interface MIB

Notes For non-TAA environments, IPS/IDS functionality is provided by the HP S1200E IPS 7500 Module (JC527A).
For non-TAA environments, IKE/IPSec functionality is provided by the HP 7500 VPN Firewall Module (JD249A).
IRF functionality is not supported on HP 7502 and 7503-S Switch Chassis.

Services 3-year, parts only, global next-day advance exchange (UW999E)
3-year, 4-hour onsite, 13x5 coverage for hardware (UX001E)
3-year, 4-hour onsite, 24x7 coverage for hardware (UX004E)
3-year, 4-hour onsite, 24x7 coverage for hardware, 24x7 software phone support (UX007E)
3-year, 24x7 SW phone support, software updates (UX010E)
1-year, post-warranty, 4-hour onsite, 13x5 coverage for hardware (HR514E)
1-year, post-warranty, 4-hour onsite, 24x7 coverage for hardware (HR515E)
1-year, post-warranty, 4-hour onsite, 24x7 coverage for hardware, 24x7 software phone support (HR516E)
Installation with minimum configuration, system-based pricing (UX032E)
4-year, 4-hour onsite, 13x5 coverage for hardware (UX002E)
4-year, 4-hour onsite, 24x7 coverage for hardware (UX005E)
4-year, 4-hour onsite, 24x7 coverage for hardware, 24x7 software phone (UX008E)
4-year, 24x7 SW phone support, software updates (UX011E)
5-year, 4-hour onsite, 13x5 coverage for hardware (UX003E)
5-year, 4-hour onsite, 24x7 coverage for hardware (UX006E)
5-year, 4-hour onsite, 24x7 coverage for hardware, 24x7 software phone (UX009E)
5-year, 24x7 SW phone support, software updates (UX012E)
3 Yr 6 hr Call-to-Repair Onsite (UX013E)
4 Yr 6 hr Call-to-Repair Onsite (UX014E)
5 Yr 6 hr Call-to-Repair Onsite (UX015E)
1-year, 6 hour Call-To-Repair Onsite for hardware (HR518E)
1-year, 24x7 software phone support, software updates (HR517E)

Refer to the HP website at: www.hp.com/networking/services for details on the service-level descriptions and product numbers. For details about services and response times in your area, please contact your local HP sales office.

HP 7506 Switch Chassis (JD239B)

Included accessories	1 HP 7506 Spare Fan Assembly (JD214A)
I/O ports and slots	6 I/O module slots Supports a maximum of 52 10GbE ports or 288 autosensing 10/100/1000 ports or 288 SFP ports or 24 40GbE ports, or a combination
Additional ports and slots	2 switch fabric slots

Technical Specifications

Power supplies	2 power-supply slots 1 minimum power-supply required (ordered separately)	
Fan tray	includes: 1 x JD214A 1 fan tray slot	
Physical characteristics	Dimensions	17.17(w) x 16.54(d) x 22.64(h) in (43.6 x 42.0 x 57.5 cm) (13U height)
	Weight	207 lb (93.9 kg), Fully loaded chassis, two fabrics, two power supplies, and a full complement of typical I/O modules
Memory and processor	Fabric	MIPS64 @ 600 MHz, 64 MB flash, 512 MB RAM
	I/O Module	MIPS64 @ 400 MHz, 512 MB RAM
Mounting	Mounts in an EIA-standard 19 in. rack or other equipment cabinet (hardware included); horizontal surface mounting only	
Performance	Throughput	488 million pps
	Routing/Switching capacity	768 Gbps
	Routing table size	256000 entries (IPv4), 8000 entries (IPv6)
	MAC address table size	512000 entries
Reliability	Availability	99.999%
Environment	Operating temperature	32°F to 113°F (0°C to 45°C)
	Operating relative humidity	10% to 95%, non-condensing
	Nonoperating/Storage temperature	-40°F to 158°F (-40°C to 70°C)
	Nonoperating/Storage relative humidity	5% to 95%, non-condensing
Electrical characteristics	Acoustic	Low-speed fan: 53.6 dB, High-speed fan: 57.7 dB
	Frequency	50/60 Hz
	Achieved Miercom Certified Green Award	
	Description	The H3C S7506E (HP 7506) is Certified Green in the 2009 Miercom Green Switches Industry Assessment.
	AC Voltage	100-120 / 200-240 VAC
	DC Voltage	-48 V / -60 V
	Current	16/50 A
	Power output	1400 W
	Notes	Based on a common power supply of 1400 W (AC/DC)
	Safety	UL 60950-1; IEC 60950-1; CAN/CSA-C22.2 No. 60950-1; EN 60950-1/A11
Emissions	VCCI Class A	
	EN 55022 Class A	
	ICES-003 Class A	
	ANSI C63.4 2003	
	AS/NZS CISPR 22 Class A	
	EN 61000-3-2:2006	
	EN 61000-3-3:1995 +A1:2001+A2:2005	
EMC Directive 2004/108/EC		
FCC (CFR 47, Part 15) Class A		
Immunity	Generic	ETSI EN 300 386 V1.3.3
	EN	EN 61000-4-2:1995+A1:1998+A2:2001
	ESD	EN 61000-4-2

Technical Specifications

Radiated	EN 61000-4-3
EFT/Burst	EN 61000-4-4
Surge	EN 61000-4-5
Conducted	EN 61000-4-6
Power frequency magnetic field	IEC 61000-4-8
Voltage dips and interruptions	EN 61000-4-11
Harmonics	EN 61000-3-2, IEC 61000-3-2
Flicker	EN 61000-3-3, IEC 61000-3-3

Management IMC - Intelligent Management Center; command-line interface; Web browser; out-of-band management (serial RS-232C); SNMP Manager; Telnet; terminal interface (serial RS-232C); modem interface; IEEE 802.3 Ethernet MIB; Ethernet Interface MIB

Notes For non-TAA environments, IPS/IDS functionality is provided by the HP S1200E IPS 7500 Module (JC527A).
For non-TAA environments, IKE/IPSec functionality is provided by the HP 7500 VPN Firewall Module (JD249A).
IRF functionality is not supported on HP 7502 and 7503-S Switch Chassis.

Services 3-year, parts only, global next-day advance exchange (UW999E)
3-year, 4-hour onsite, 13x5 coverage for hardware (UX001E)
3-year, 4-hour onsite, 24x7 coverage for hardware (UX004E)
3-year, 4-hour onsite, 24x7 coverage for hardware, 24x7 software phone support (UX007E)
3-year, 24x7 SW phone support, software updates (UX010E)
1-year, post-warranty, 4-hour onsite, 13x5 coverage for hardware (HR514E)
1-year, post-warranty, 4-hour onsite, 24x7 coverage for hardware (HR515E)
1-year, post-warranty, 4-hour onsite, 24x7 coverage for hardware, 24x7 software phone support (HR516E)
Installation with minimum configuration, system-based pricing (UX032E)
4-year, 4-hour onsite, 13x5 coverage for hardware (UX002E)
4-year, 4-hour onsite, 24x7 coverage for hardware (UX005E)
4-year, 4-hour onsite, 24x7 coverage for hardware, 24x7 software phone (UX008E)
4-year, 24x7 SW phone support, software updates (UX011E)
5-year, 4-hour onsite, 13x5 coverage for hardware (UX003E)
5-year, 4-hour onsite, 24x7 coverage for hardware (UX006E)
5-year, 4-hour onsite, 24x7 coverage for hardware, 24x7 software phone (UX009E)
5-year, 24x7 SW phone support, software updates (UX012E)
3 Yr 6 hr Call-to-Repair Onsite (UX013E)
4 Yr 6 hr Call-to-Repair Onsite (UX014E)
5 Yr 6 hr Call-to-Repair Onsite (UX015E)
1-year, 6 hour Call-To-Repair Onsite for hardware (HR518E)
1-year, 24x7 software phone support, software updates (HR517E)

Refer to the HP website at: www.hp.com/networking/services for details on the service-level descriptions and product numbers. For details about services and response times in your area, please contact your local HP sales office.

HP 7503 Switch Chassis (JD240B)

Included accessories	1 HP 7503 Spare Fan Assembly (JD212A)
I/O ports and slots	3 I/O module slots Supports a maximum of 28 10GbE ports or 144 autosensing 10/100/1000 ports or 144 SFP ports or 12 40GbE ports, or a combination
Additional ports and	2 switch fabric slots

Technical Specifications

slots

Power supplies 2 power-supply slots
1 minimum power-supply required (ordered separately)

Fan tray includes: 1 x JD212A
1 fan tray slot

Physical characteristics **Dimensions** 17.17(w) x 16.54(d) x 17.36(h) in (43.6 x 42.0 x 44.1 cm) (10U height)
Weight 147 lb (66.68 kg), Fully loaded chassis, two fabrics, two power supplies, and a full complement of typical I/O modules

Memory and processor **Fabric** MIPS64 @ 600 MHz, 64 MB flash, 512 MB RAM
I/O Module MIPS64 @ 400 MHz, 512 MB RAM

Mounting Mounts in an EIA-standard 19 in. rack or other equipment cabinet (hardware included); horizontal surface mounting only

Performance **Throughput** 274 million pps
Routing/Switching capacity 480 Gbps
Routing table size 256000 entries (IPv4), 8000 entries (IPv6)
MAC address table size 512000 entries

Reliability **Availability** 99.999%
Environment **Operating temperature** 32°F to 113°F (0°C to 45°C)
Operating relative humidity 10% to 95%, non-condensing
Nonoperating/Storage temperature -40°F to 158°F (-40°C to 70°C)
Nonoperating/Storage relative humidity 5% to 95%, non-condensing

Electrical characteristics **Acoustic** Low-speed fan: 51.6 dB, High-speed fan: 56.1 dB
Frequency 50/60 Hz
Voltage 100-120 / 200-240 VAC
Current 16/50 A
Power output 1400 W
Notes Based on a common power supply of 1400 W (AC/DC)

Safety UL 60950-1; IEC 60950-1; CAN/CSA-C22.2 No. 60950-1; EN 60950-1/A11

Emissions VCCI Class A
EN 55022 Class A
ICES-003 Class A
ANSI C63.4 2003
AS/NZS CISPR 22 Class A
EN 61000-3-2:2006
EN 61000-3-3:1995 +A1:2001+A2:2005
EMC Directive 2004/108/EC
FCC (CFR 47, Part 15) Class A

Immunity **Generic** ETSI EN 300 386 V1.3.3
EN EN 61000-4-2:1995+A1:1998+A2:2001
ESD EN 61000-4-2
Radiated EN 61000-4-3
EFT/Burst EN 61000-4-4
Surge EN 61000-4-5

Technical Specifications

Conducted	EN 61000-4-6
Power frequency magnetic field	IEC 61000-4-8
Voltage dips and interruptions	EN 61000-4-11
Harmonics	EN 61000-3-2, IEC 61000-3-2
Flicker	EN 61000-3-3, IEC 61000-3-3

Management IMC - Intelligent Management Center; command-line interface; Web browser; out-of-band management (serial RS-232C); SNMP Manager; Telnet; terminal interface (serial RS-232C); modem interface; IEEE 802.3 Ethernet MIB; Ethernet Interface MIB

Notes For non-TAA environments, IPS/IDS functionality is provided by the HP S1200E IPS 7500 Module (JC527A).
For non-TAA environments, IKE/IPSec functionality is provided by the HP 7500 VPN Firewall Module (JD249A).
IRF functionality is not supported on HP 7502 and 7503-S Switch Chassis.

Services 3-year, parts only, global next-day advance exchange (HP799E)
3-year, 4-hour onsite, 13x5 coverage for hardware (HP800E)
3-year, 4-hour onsite, 24x7 coverage for hardware (HP803E)
3-year, 4-hour onsite, 24x7 coverage for hardware, 24x7 software phone support (HP806E)
3-year, 24x7 SW phone support, software updates (HP809E)
Installation with minimum configuration, system-based pricing (UX032E)
4-year, 4-hour onsite, 13x5 coverage for hardware (HP801E)
4-year, 4-hour onsite, 24x7 coverage for hardware (HP804E)
4-year, 4-hour onsite, 24x7 coverage for hardware, 24x7 software phone (HP807E)
4-year, 24x7 SW phone support, software updates (HP810E)
5-year, 4-hour onsite, 13x5 coverage for hardware (HP802E)
5-year, 4-hour onsite, 24x7 coverage for hardware (HP805E)
5-year, 4-hour onsite, 24x7 coverage for hardware, 24x7 software phone (HP808E)
5-year, 24x7 SW phone support, software updates (HP811E)
3 Yr 6 hr Call-to-Repair Onsite (HP812E)
4 Yr 6 hr Call-to-Repair Onsite (HP813E)
5 Yr 6 hr Call-to-Repair Onsite (HP814E)
1-year, 4-hour onsite, 13x5 coverage for hardware (HR519E)
1-year, 4-hour onsite, 24x7 coverage for hardware (HR520E)
1-year, 6 hour Call-To-Repair Onsite for hardware (HR523E)
1-year, 24x7 software phone support, software updates (HR522E)
1-year, 4-hour onsite, 24x7 coverage for hardware, 24x7 software phone support and software updates (HR521E)

Refer to the HP website at: www.hp.com/networking/services for details on the service-level descriptions and product numbers. For details about services and response times in your area, please contact your local HP sales office.

HP 7503-S Switch Chassis with 1 Fabric Slot (JD243B)

Included accessories	1 HP 7503-S Spare Fan Assembly (JC672A)
I/O ports and slots	2 I/O module slots Supports a maximum of 16 10GbE ports or 120 autosensing 10/100/1000 ports or 120 SFP ports or 8 40GbE ports, or a combination
Additional ports and slots	1 switch fabric slot
Power supplies	2 power-supply slots 1 minimum power-supply required (ordered separately)

Technical Specifications

Fan tray	includes: 1 x JC672A 1 fan tray slot	
Physical characteristics	Dimensions	17.17(w) x 16.54(d) x 6.89(h) in (43.6 x 42.0 x 17.5 cm) (4U height)
	Weight	59 lb (26.76 kg), Fully loaded chassis, one fabric, two power supplies, and a full complement of typical I/O modules
Memory and processor	Fabric	MIPS64 @ 400 MHz, 64 MB flash, 512 MB RAM
	I/O Module	MIPS64 @ 400 MHz, 512 MB RAM
Mounting	Mounts in an EIA-standard 19 in. rack or other equipment cabinet (hardware included); horizontal surface mounting only	
Performance	Throughput	107 million pps
	Routing/Switching capacity	144 Gb/s
	Routing table size	256000 entries (IPv4), 8000 entries (IPv6)
	MAC address table size	512000 entries
Reliability	Availability	99.999%
Environment	Operating temperature	32°F to 113°F (0°C to 45°C)
	Operating relative humidity	10% to 95%, non-condensing
	Nonoperating/Storage temperature	-40°F to 158°F (-40°C to 70°C)
	Nonoperating/Storage relative humidity	5% to 95%, non-condensing
	Acoustic	High-speed fan: 56.7 dB
Electrical characteristics	Frequency	50/60 Hz
	AC Voltage	100-120 / 200-240 VAC
	Current	5/10 A
	Power output	300 W
	Notes	Based on a common power supply of 300 W (AC/DC)
Safety	UL 60950-1; IEC 60950-1; CAN/CSA-C22.2 No. 60950-1; EN 60950-1/A11	
Emissions	VCCI Class A EN 55022 Class A ICES-003 Class A ANSI C63.4 2003 AS/NZS CISPR 22 Class A EN 61000-3-2:2006 EN 61000-3-3:1995 +A1:2001+A2:2005 EMC Directive 2004/108/EC FCC (CFR 47, Part 15) Class A	
Immunity	Generic	ETSI EN 300 386 V1.3.3
	EN	EN 61000-4-2:1995+A1:1998+A2:2001
	ESD	EN 61000-4-2
	Radiated	EN 61000-4-3
	EFT/Burst	EN 61000-4-4
	Surge	EN 61000-4-5
	Conducted	EN 61000-4-6
	Power frequency magnetic field	IEC 61000-4-8

Technical Specifications

	Voltage dips and interruptions	EN 61000-4-11
	Harmonics	EN 61000-3-2, IEC 61000-3-2
	Flicker	EN 61000-3-3, IEC 61000-3-3
Management	IMC - Intelligent Management Center; command-line interface; Web browser; out-of-band management (serial RS-232C); SNMP Manager; Telnet; terminal interface (serial RS-232C); modem interface; IEEE 802.3 Ethernet MIB; Ethernet Interface MIB	
Notes	For non-TAA environments, IPS/IDS functionality is provided by the HP S1200E IPS 7500 Module (JC527A). For non-TAA environments, IKE/IPSec functionality is provided by the HP 7500 VPN Firewall Module (JD249A). IRF functionality is not supported on HP 7502 and 7503-S Switch Chassis.	
Services	3-year, parts only, global next-day advance exchange (HP799E) 3-year, 4-hour onsite, 13x5 coverage for hardware (HP800E) 3-year, 4-hour onsite, 24x7 coverage for hardware (HP803E) 3-year, 4-hour onsite, 24x7 coverage for hardware, 24x7 software phone support (HP806E) 3-year, 24x7 SW phone support, software updates (HP809E) Installation with minimum configuration, system-based pricing (UX032E) 4-year, 4-hour onsite, 13x5 coverage for hardware (HP801E) 4-year, 4-hour onsite, 24x7 coverage for hardware (HP804E) 4-year, 4-hour onsite, 24x7 coverage for hardware, 24x7 software phone (HP807E) 4-year, 24x7 SW phone support, software updates (HP810E) 5-year, 4-hour onsite, 13x5 coverage for hardware (HP802E) 5-year, 4-hour onsite, 24x7 coverage for hardware (HP805E) 5-year, 4-hour onsite, 24x7 coverage for hardware, 24x7 software phone (HP808E) 5-year, 24x7 SW phone support, software updates (HP811E) 3 Yr 6 hr Call-to-Repair Onsite (HP812E) 4 Yr 6 hr Call-to-Repair Onsite (HP813E) 5 Yr 6 hr Call-to-Repair Onsite (HP814E) 1-year, 4-hour onsite, 13x5 coverage for hardware (HR519E) 1-year, 4-hour onsite, 24x7 coverage for hardware (HR520E) 1-year, 6 hour Call-To-Repair Onsite for hardware (HR523E) 1-year, 24x7 software phone support, software updates (HR522E) 1-year, 4-hour onsite, 24x7 coverage for hardware, 24x7 software phone support and software updates (HR521E)	
	Refer to the HP website at: www.hp.com/networking/services for details on the service-level descriptions and product numbers. For details about services and response times in your area, please contact your local HP sales office.	

HP 7502 Switch Chassis (JD242B)

Included accessories	1 HP 7502 Spare Fan Assembly (JD213A)
I/O ports and slots	2 I/O module slots Supports a maximum of 16 10GbE ports or 96 autosensing 10/100/1000 ports or 96 SFP ports or 8 40GbE ports, or a combination
Additional ports and slots	2 MPU (for management modules) slots
Power supplies	2 power-supply slots 1 minimum power-supply required (ordered separately)
Fan tray	includes: 1 x JD213A 1 fan tray slot
Physical characteristics	Dimensions 17.17(w) x 16.54(d) x 6.89(h) in (43.6 x 42.0 x 17.5 cm) (4U height)

Technical Specifications

	Weight	59 lb (26.76 kg), Fully loaded chassis, two management modules, two power supplies, and a full complement of typical I/O modules
Memory and processor	Fabric	MIPS64 @ 600 MHz, 64 MB flash, 512 MB RAM
	I/O Module	MIPS64 @ 400 MHz, 512 MB RAM
Mounting	Mounts in an EIA-standard 19 in. rack or other equipment cabinet (hardware included); horizontal surface mounting only	
Performance	Throughput	143 million pps
	Routing/Switching capacity	192 Gb/s
	Routing table size	256000 entries (IPv4), 8000 entries (IPv6)
	MAC address table size	512000 entries
Reliability	Availability	99.999%
Environment	Operating temperature	32°F to 113°F (0°C to 45°C)
	Operating relative humidity	10% to 95%, non-condensing
	Nonoperating/Storage temperature	-40°F to 158°F (-40°C to 70°C)
	Nonoperating/Storage relative humidity	5% to 95%, non-condensing
Electrical characteristics	Acoustic	Low-speed fan: 49.8 dB, High-speed fan: 56.7 dB
	Frequency	50/60 Hz
	AC Voltage	100-120/200-240 VAC
	Current	5/10 A
	Power output	300 W
	Notes	Based on a common power supply 300 W (AC/DC)
Safety	UL 60950-1; IEC 60950-1; CAN/CSA-C22.2 No. 60950-1; EN 60950-1/A11	
Emissions	VCCI Class A EN 55022 Class A ICES-003 Class A ANSI C63.4 2003 AS/NZS CISPR 22 Class A EN 61000-3-2:2006 EN 61000-3-3:1995 +A1:2001+A2:2005 EMC Directive 2004/108/EC FCC (CFR 47, Part 15) Class A	
Immunity	Generic	ETSI EN 300 386 V1.3.3
	EN	EN 61000-4-2:1995+A1:1998+A2:2001
	ESD	EN 61000-4-2
	Radiated	EN 61000-4-3
	EFT/Burst	EN 61000-4-4
	Surge	EN 61000-4-5
	Conducted	EN 61000-4-6
	Power frequency magnetic field	IEC 61000-4-8
	Voltage dips and interruptions	EN 61000-4-11
	Harmonics	EN 61000-3-2, IEC 61000-3-2
	Flicker	EN 61000-3-3, IEC 61000-3-3

Technical Specifications

Management	IMC - Intelligent Management Center; command-line interface; Web browser; out-of-band management (serial RS-232C); SNMP Manager; Telnet; terminal interface (serial RS-232C); modem interface; IEEE 802.3 Ethernet MIB; Ethernet Interface MIB
Notes	For non-TAA environments, IPS/IDS functionality is provided by the HP S1200E IPS 7500 Module (JC527A). For non-TAA environments, IKE/IPSec functionality is provided by the HP 7500 VPN Firewall Module (JD249A). IRF functionality is not supported on HP 7502 and 7503-S Switch Chassis.
Services	3-year, parts only, global next-day advance exchange (HP799E) 3-year, 4-hour onsite, 13x5 coverage for hardware (HP800E) 3-year, 4-hour onsite, 24x7 coverage for hardware (HP803E) 3-year, 4-hour onsite, 24x7 coverage for hardware, 24x7 software phone support (HP806E) 3-year, 24x7 SW phone support, software updates (HP809E) Installation with minimum configuration, system-based pricing (UX032E) 4-year, 4-hour onsite, 13x5 coverage for hardware (HP801E) 4-year, 4-hour onsite, 24x7 coverage for hardware (HP804E) 4-year, 4-hour onsite, 24x7 coverage for hardware, 24x7 software phone (HP807E) 4-year, 24x7 SW phone support, software updates (HP810E) 5-year, 4-hour onsite, 13x5 coverage for hardware (HP802E) 5-year, 4-hour onsite, 24x7 coverage for hardware (HP805E) 5-year, 4-hour onsite, 24x7 coverage for hardware, 24x7 software phone (HP808E) 5-year, 24x7 SW phone support, software updates (HP811E) 3 Yr 6 hr Call-to-Repair Onsite (HP812E) 4 Yr 6 hr Call-to-Repair Onsite (HP813E) 5 Yr 6 hr Call-to-Repair Onsite (HP814E) 1-year, 4-hour onsite, 13x5 coverage for hardware (HR519E) 1-year, 4-hour onsite, 24x7 coverage for hardware (HR520E) 1-year, 6 hour Call-To-Repair Onsite for hardware (HR523E) 1-year, 24x7 software phone support, software updates (HR522E) 1-year, 4-hour onsite, 24x7 coverage for hardware, 24x7 software phone support and software updates (HR521E)
	Refer to the HP website at: www.hp.com/networking/services for details on the service-level descriptions and product numbers. For details about services and response times in your area, please contact your local HP sales office.

HP 7503 Switch with 48-port Gig-T PoE+ Module and 384Gbps MPU with 2 XFP ports (JG507A)

Included accessories	1 HP 7503 Spare Fan Assembly (JD212A) 1 HP 7500 384Gbps Fabric Module with 2 XFP Ports (JD193B) 1 HP 7500 48-port Gig-T PoE+ Extended Module (JD229B)
I/O ports and slots	3 I/O module slots Supports a maximum of 28 10GbE ports or 144 autosensing 10/100/1000 ports or 144 SFP ports, or a combination
Additional ports and slots	2 switch fabric slots
Power supplies	2 power-supply slots 1 minimum power-supply required (ordered separately)
Fan tray	includes: 1 x JD212A 1 fan tray slot
Physical characteristics	Dimensions 17.17(w) x 16.54(d) x 17.36(h) in (43.6 x 42.0 x 44.1 cm) (10U height) Weight 147 lb (66.68 kg), Fully loaded chassis, two fabrics, two power supplies, and a full complement of typical I/O modules

Technical Specifications

Memory and processor	Fabric	MIPS64 @ 600 MHz, 64 MB flash, 512 MB RAM
	I/O Module	MIPS64 @ 400 MHz, 512 MB RAM
Mounting	Mounts in an EIA-standard 19 in. rack or other equipment cabinet (hardware included); horizontal surface mounting only	
Performance	Throughput	274 million pps
	Routing/Switching capacity	480 Gb/s
	Routing table size	256000 entries (IPv4), 8000 entries (IPv6)
	MAC address table size	512000 entries
Reliability	Availability	99.999%
Environment	Operating temperature	32°F to 113°F (0°C to 45°C)
	Operating relative humidity	10% to 95%, non-condensing
	Nonoperating/Storage temperature	-40°F to 158°F (-40°C to 70°C)
	Nonoperating/Storage relative humidity	5% to 95%, non-condensing
Electrical characteristics	Acoustic	Low-speed fan: 51.6 dB, High-speed fan: 56.1 dB
	Frequency	50/60 Hz
	AC Voltage	100-120/200-240 VAC
	Current	16/50 A
	Power output	1400 W
	Notes	Based on a common power supply of 1400 W (AC/DC)
Safety	UL 60950-1; IEC 60950-1; CAN/CSA-C22.2 No. 60950-1; EN 60950-1/A11	
Emissions	VCCI Class A EN 55022 Class A ICES-003 Class A ANSI C63.4 2003 AS/NZS CISPR 22 Class A EN 61000-3-2:2006 EN 61000-3-3:1995 +A1:2001+A2:2005 EMC Directive 2004/108/EC FCC (CFR 47, Part 15) Class A	
Immunity	Generic	ETSI EN 300 386 V1.3.3
	EN	EN 61000-4-2:1995+A1:1998+A2:2001
	ESD	EN 61000-4-2
	Radiated	EN 61000-4-3
	EFT/Burst	EN 61000-4-4
	Surge	EN 61000-4-5
	Conducted	EN 61000-4-6
	Power frequency magnetic field	IEC 61000-4-8
	Voltage dips and interruptions	EN 61000-4-11
	Harmonics	EN 61000-3-2, IEC 61000-3-2
	Flicker	EN 61000-3-3, IEC 61000-3-3
Management	IMC - Intelligent Management Center; command-line interface; Web browser; out-of-band management	

Technical Specifications

	(serial RS-232C); SNMP Manager; Telnet; terminal interface (serial RS-232C); modem interface; IEEE 802.3 Ethernet MIB; Ethernet Interface MIB
Notes	For non-TAA environments, IPS/IDS functionality is provided by the HP S1200E IPS 7500 Module (JC527A). For non-TAA environments, IKE/IPSec functionality is provided by the HP 7500 VPN Firewall Module (JD249A). IRF functionality is not supported on HP 7502 and 7503-S Switch Chassis.
Services	Refer to the HP website at www.hp.com/networking/services for details on the service-level descriptions and product numbers. For details about services and response times in your area, please contact your local HP sales office.

HP 7506 Switch with 2 48-port Gig-T PoE+ Modules and 384Gbps MPU with 2 XFP ports (JG508A)

Included accessories	1 HP 7506 Spare Fan Assembly (JD214A) 2 HP 7500 48-port Gig-T PoE+ Extended Module (JD229B) 1 HP 7500 384Gbps Fabric Module with 2 XFP Ports (JD193B)	
I/O ports and slots	6 I/O module slots Supports a maximum of 52 10GbE ports or 288 autosensing 10/100/1000 ports or 288 SFP ports, or a combination	
Additional ports and slots	2 switch fabric slots	
Power supplies	2 power-supply slots 1 minimum power-supply required (ordered separately)	
Fan tray	includes: 1 x JD214A 1 fan tray slot	
Physical characteristics	Dimensions	17.17(w) x 16.54(d) x 22.64(h) in (43.6 x 42.0 x 57.5 cm) (13U height)
	Weight	207 lb (93.9 kg), Fully loaded chassis, two fabrics, two power supplies, and a full complement of typical I/O modules
Memory and processor	Fabric	MIPS64 @ 600 MHz, 64 MB flash, 512 MB RAM
	I/O Module	MIPS64 @ 400 MHz, 512 MB RAM
Mounting	Mounts in an EIA-standard 19 in. rack or other equipment cabinet (hardware included); horizontal surface mounting only	
Performance	Throughput	488 million pps
	Routing/Switching capacity	768 Gb/s
	Routing table size	256000 entries (IPv4), 8000 entries (IPv6)
	MAC address table size	512000 entries
Reliability	Availability	99.999%
Environment	Operating temperature	32°F to 113°F (0°C to 45°C)
	Operating relative humidity	10% to 95%, non-condensing
	Nonoperating/Storage temperature	-40°F to 158°F (-40°C to 70°C)
	Nonoperating/Storage relative humidity	5% to 95%, non-condensing
	Acoustic	High-speed fan: 56.7 dB
Electrical characteristics	Frequency	50/60 Hz Achieved Miercom Certified Green Award
	Description	The H3C S7506E (HP 7606) is Certified Green in the 2009 Miercom Green Switches Industry Assessment.

Technical Specifications

	Voltage	100-120/200-240 VAC
	AC Current	16/50 A
	Power output	1400 W
	Notes	Based on a common power supply of 1400 W (AC/DC)
Safety		UL 60950-1; IEC 60950-1; CAN/CSA-C22.2 No. 60950-1; EN 60950-1/A11
Emissions		VCCI Class A EN 55022 Class A ICES-003 Class A ANSI C63.4 2003 AS/NZS CISPR 22 Class A EN 61000-3-2:2006 EN 61000-3-3:1995 +A1:2001+A2:2005 EMC Directive 2004/108/EC FCC (CFR 47, Part 15) Class A
Immunity	Generic	ETSI EN 300 386 V1.3.3
	EN	EN 61000-4-2:1995+A1:1998+A2:2001
	ESD	EN 61000-4-2
	Radiated	EN 61000-4-3
	EFT/Burst	EN 61000-4-4
	Surge	EN 61000-4-5
	Conducted	EN 61000-4-6
	Power frequency magnetic field	IEC 61000-4-8
	Voltage dips and interruptions	EN 61000-4-11
	Harmonics	EN 61000-3-2, IEC 61000-3-2
	Flicker	EN 61000-3-3, IEC 61000-3-3
Management		IMC - Intelligent Management Center; command-line interface; Web browser; out-of-band management (serial RS-232C); SNMP Manager; Telnet; terminal interface (serial RS-232C); modem interface; IEEE 802.3 Ethernet MIB; Ethernet Interface MIB
Notes		For non-TAA environments, IPS/IDS functionality is provided by the HP S1200E IPS 7500 Module (JC527A). For non-TAA environments, IKE/IPSec functionality is provided by the HP 7500 VPN Firewall Module (JD249A). IRF functionality is not supported on HP 7502 and 7503-S Switch Chassis.
Services		Refer to the HP website at: www.hp.com/networking/services for details on the service-level descriptions and product numbers. For details about services and response times in your area, please contact your local HP sales office.

HP 7510 Switch with 2 48-port Gig-T PoE+ Modules and 768Gbps MPU (JG509A)

Included accessories	2 HP 7500 48-port Gig-T PoE+ Extended Module (JD229B) 1 HP 7500 768Gbps Fabric Module (JD220A) 1 HP 7510 Spare Fan Assembly (JD216A)
I/O ports and slots	10 I/O module slots Supports a maximum of 84 10GbE ports or 480 autosensing 10/100/1000 ports or 480 SFP ports, or a combination
Additional ports and slots	2 switch fabric slots
Power supplies	2 power-supply slots

Technical Specifications

		1 minimum power-supply required (ordered separately)
Fan tray		includes: 1 x JD216A 1 fan tray slot
Physical characteristics	Dimensions	17.17(w) x 16.54(d) x 27.87(h) in (43.6 x 42.0 x 70.8 cm) (16U height)
	Weight	211 lb (95.71 kg), Fully loaded chassis, two fabrics, two power supplies, and a full complement of typical I/O modules
Memory and processor	Fabric	MIPS64 @ 600 MHz, 64 MB flash, 512 MB RAM
	I/O Module	MIPS64 @ 400 MHz, 512 MB RAM
Mounting		Mounts in an EIA-standard 19 in. rack or other equipment cabinet (hardware included); horizontal surface mounting only
Performance	Throughput	714 million pps
	Routing/Switching capacity	1152 Gb/s
	Routing table size	256000 entries (IPv4), 8000 entries (IPv6)
	MAC address table size	512000 entries
Reliability	Availability	99.999%
Environment	Operating temperature	32°F to 113°F (0°C to 45°C)
	Operating relative humidity	10% to 95%, non-condensing
	Nonoperating/Storage temperature	-40°F to 158°F (-40°C to 70°C)
	Nonoperating/Storage relative humidity	5% to 95%, non-condensing
	Acoustic	Low-speed fan: 53.5 dB, High-speed fan: 56.7 d
Electrical characteristics	Frequency	50/60 Hz
	AC Voltage	100-120/200-240 VAC
	Current	16/50 A
	Power output	1400 W
	Notes	Based on a common power supply of 1400 W (AC/DC)
Safety		UL 60950-1; IEC 60950-1; CAN/CSA-C22.2 No. 60950-1; EN 60950-1/A11
Emissions		VCCI Class A EN 55022 Class A ICES-003 Class A ANSI C63.4 2003 AS/NZS CISPR 22 Class A EN 61000-3-2:2006 EN 61000-3-3:1995 +A1:2001+A2:2005 EMC Directive 2004/108/EC FCC (CFR 47, Part 15) Class A
Immunity	Generic	ETSI EN 300 386 V1.3.3
	EN	EN 61000-4-2:1995+A1:1998+A2:2001
	ESD	EN 61000-4-2
	Radiated	EN 61000-4-3
	EFT/Burst	EN 61000-4-4
	Surge	EN 61000-4-5
	Conducted	EN 61000-4-6
	Power frequency	IEC 61000-4-8

Technical Specifications

	magnetic field	
	Voltage dips and interruptions	EN 61000-4-11
	Harmonics	EN 61000-3-2, IEC 61000-3-2
	Flicker	EN 61000-3-3, IEC 61000-3-3
Management	IMC - Intelligent Management Center; command-line interface; Web browser; out-of-band management (serial RS-232C); SNMP Manager; Telnet; terminal interface (serial RS-232C); modem interface; IEEE 802.3 Ethernet MIB; Ethernet Interface MIB	
Notes	For non-TAA environments, IPS/IDS functionality is provided by the HP S1200E IPS 7500 Module (JC527A). For non-TAA environments, IKE/IPSec functionality is provided by the HP 7500 VPN Firewall Module (JD249A). IRF functionality is not supported on HP 7502 and 7503-S Switch Chassis.	
Services	Refer to the HP website at: www.hp.com/networking/services for details on the service-level descriptions and product numbers. For details about services and response times in your area, please contact your local HP sales office.	
Standards and protocols (applies to all products in series)	<p>BGP</p> <p>RFC 1771 BGPv4 RFC 1772 Application of the BGP RFC 1965 BGP4 confederations RFC 1997 BGP Communities Attribute RFC 1998 PPP Gandalf FZA Compression Protocol RFC 2385 BGP Session Protection via TCP MD5 RFC 2439 BGP Route Flap Damping RFC 2796 BGP Route Reflection RFC 2858 BGP-4 Multi-Protocol Extensions RFC 2918 Route Refresh Capability RFC 3065 Autonomous System Confederations for BGP RFC 3392 Capabilities Advertisement with BGP-4 RFC 4271 A Border Gateway Protocol 4 (BGP-4) RFC 4272 BGP Security Vulnerabilities Analysis RFC 4273 Definitions of Managed Objects for BGP-4 RFC 4274 BGP-4 Protocol Analysis RFC 4275 BGP-4 MIB Implementation Survey RFC 4276 BGP-4 Implementation Report RFC 4277 Experience with the BGP-4 Protocol RFC 4360 BGP Extended Communities Attribute RFC 4456 BGP Route Reflection: An Alternative to Full Mesh Internal BGP (IBGP) RFC 5291 Outbound Route Filtering Capability for BGP-4 RFC 5292 Address-Prefix-Based Outbound Route Filter for BGP-4</p> <p>Denial of service protection</p> <p>RFC 2267 Network Ingress Filtering Automatic filtering of well-known denial-of-service packets CPU DoS Protection Rate Limiting by ACLs</p>	<p>MIBs</p> <p>RFC 1156 (TCP/IP MIB) RFC 1157 A Simple Network Management Protocol (SNMP) RFC 1215 A Convention for Defining Traps for use with the SNMP RFC 1229 Interface MIB Extensions RFC 1493 Bridge MIB RFC 1573 SNMP MIB II RFC 1643 Ethernet MIB RFC 1657 BGP-4 MIB RFC 1724 RIPv2 MIB RFC 1757 Remote Network Monitoring MIB RFC 1850 OSPFv2 MIB RFC 1907 SNMPv2 MIB RFC 2011 SNMPv2 MIB for IP RFC 2012 SNMPv2 MIB for TCP RFC 2013 SNMPv2 MIB for UDP RFC 2096 IP Forwarding Table MIB RFC 2233 Interfaces MIB RFC 2452 IPV6-TCP-MIB RFC 2454 IPV6-UDP-MIB RFC 2465 IPV6 MIB RFC 2466 ICMPv6 MIB RFC 2571 SNMP Framework MIB RFC 2572 SNMP-MPD MIB RFC 2573 SNMP-Notification MIB RFC 2573 SNMP-Target MIB RFC 2578 Structure of Management Information Version 2 (SMIPv2) RFC 2580 Conformance Statements for SMIPv2 RFC 2618 RADIUS Client MIB RFC 2620 RADIUS Accounting MIB RFC 2665 Ethernet-Like-MIB RFC 2668 802.3 MAU MIB RFC 2674 802.1p and IEEE 802.1Q Bridge MIB RFC 2787 VRRP MIB RFC 2819 RMON MIB</p>

Technical Specifications

Device management

RFC 1157 SNMPv1/v2c
RFC 1305 NTPv3
RFC 1902 (SNMPv2)
RFC 2271 FrameWork
RFC 2579 (SMIv2 Text Conventions)
RFC 2580 (SMIv2 Conformance)
RFC 2819 (RMON groups Alarm, Event, History and Statistics only)
HTTP, SSHv1, and Telnet
Multiple Configuration Files
Multiple Software Images
SSHv1/SSHv2 Secure Shell
TACACS/TACACS+
Web UI

General protocols

IEEE 802.1ad Q-in-Q
IEEE 802.1ag Service Layer OAM
IEEE 802.1p Priority
IEEE 802.1Q VLANs
IEEE 802.1s Multiple Spanning Trees
IEEE 802.1w Rapid Reconfiguration of Spanning Tree
IEEE 802.1X PAE
IEEE 802.3ab 1000BASE-T
IEEE 802.3ac (VLAN Tagging Extension)
IEEE 802.3ad Link Aggregation Control Protocol (LACP)
IEEE 802.3ae 10-Gigabit Ethernet
IEEE 802.3af Power over Ethernet
IEEE 802.3ah Ethernet in First Mile over Point to Point Fiber - EFMF
IEEE 802.3at
IEEE 802.3ba 40 and 100 Gigabit Ethernet Architecture
IEEE 802.3u 100BASE-X
IEEE 802.3x Flow Control
IEEE 802.3z 1000BASE-X
RFC 768 UDP
RFC 783 TFTP Protocol (revision 2)
RFC 791 IP
RFC 792 ICMP
RFC 793 TCP
RFC 826 ARP
RFC 854 TELNET
RFC 894 IP over Ethernet
RFC 903 RARP
RFC 906 TFTP Bootstrap
RFC 925 Multi-LAN Address Resolution
RFC 950 Internet Standard Subnetting Procedure
RFC 951 BOOTP
RFC 959 File Transfer Protocol (FTP)
RFC 1027 Proxy ARP
RFC 1035 Domain Implementation and Specification

RFC 2925 Ping MIB
RFC 2933 IGMP MIB
RFC 2934 Protocol Independent Multicast MIB for IPv4
RFC 3414 SNMP-User based-SM MIB
RFC 3415 SNMP-View based-ACM MIB
RFC 3417 Simple Network Management Protocol (SNMP) over IEEE 802 Networks
RFC 3418 MIB for SNMPv3
RFC 3595 Textual Conventions for IPv6 Flow Label
RFC 3621 Power Ethernet MIB
RFC 3813 MPLS LSR MIB
RFC 3814 MPLS FTN MIB
RFC 3815 MPLS LDP MIB
RFC 3826 AES for SNMP's USM MIB
RFC 4133 Entity MIB (Version 3)
RFC 4444 Management Information Base for Intermediate System to Intermediate System (IS-IS)

MPLS

RFC 2205 Resource ReSerVation Protocol
RFC 2209 Resource ReSerVation Protocol (RSVP)
RFC 2702 Requirements for Traffic Engineering Over MPLS
RFC 2858 Multiprotocol Extensions for BGP-4
RFC 2961 RSVP Refresh Overhead Reduction Extensions
RFC 3031 Multiprotocol Label Switching Architecture
RFC 3032 MPLS Label Stack Encoding
RFC 3107 Carrying Label Information in BGP-4
RFC 3209 RSVP-TE: Extensions to RSVP for LSP Tunnels
RFC 3212 Constraint-Based LSP Setup using LDP
RFC 3479 Fault Tolerance for the Label Distribution Protocol (LDP)
RFC 3487 Graceful Restart Mechanism for LDP
RFC 3564 Requirements for Support of Differentiated Service-aware MPLS Traffic Engineering
RFC 4364 BGP/MPLS IP Virtual Private Networks (VPNs)
RFC 4379 Detecting Multi-Protocol Label Switched (MPLS) Data Plane Failures
RFC 4447 Pseudowire Setup and Maintenance Using LDP
RFC 4448 Encapsulation Methods for Transport of Ethernet over MPLS Networks
RFC 4664 Framework for Layer 2 Virtual Private Networks
RFC 4665 Service Requirements for Layer 2 Provider Provisioned Virtual Private Networks
RFC 4761 Virtual Private LAN Service (VPLS) Using BGP for Auto-Discovery and Signaling

Technical Specifications

RFC 1042 IP Datagrams
RFC 1058 RIPv1
RFC 1142 OSI IS-IS Intra-domain Routing Protocol
RFC 1195 OSI ISIS for IP and Dual Environments
RFC 1213 Management Information Base for Network Management of TCP/IP-based internets
RFC 1256 ICMP Router Discovery Protocol (IRDP)
RFC 1293 Inverse Address Resolution Protocol
RFC 1305 NTPv3
RFC 1350 TFTP Protocol (revision 2)
RFC 1393 Traceroute Using an IP Option
RFC 1519 CIDR
RFC 1531 Dynamic Host Configuration Protocol
RFC 1533 DHCP Options and BOOTP Vendor Extensions
RFC 1591 DNS (client only)
RFC 1624 Incremental Internet Checksum
RFC 1701 Generic Routing Encapsulation
RFC 1721 RIP-2 Analysis
RFC 1723 RIP v2
RFC 1812 IPv4 Routing
RFC 2030 Simple Network Time Protocol (SNTP) v4
RFC 2082 RIP-2 MD5 Authentication
RFC 2091 Trigger RIP
RFC 2131 DHCP
RFC 2138 Remote Authentication Dial In User Service (RADIUS)
RFC 2236 IGMP Snooping
RFC 2338 VRRP
RFC 2453 RIPv2
RFC 2644 Directed Broadcast Control
RFC 2763 Dynamic Name-to-System ID mapping support
RFC 2784 Generic Routing Encapsulation (GRE)
RFC 2865 Remote Authentication Dial In User Service (RADIUS)
RFC 2966 Domain-wide Prefix Distribution with Two-Level IS-IS
RFC 2973 IS-IS Mesh Groups
RFC 3022 Traditional IP Network Address Translator (Traditional NAT)
RFC 3277 IS-IS Transient Blackhole Avoidance
RFC 3567 Intermediate System to Intermediate System (IS-IS) Cryptographic Authentication
RFC 3719 Recommendations for Interoperable Networks using Intermediate System to Intermediate System (IS-IS)
RFC 3784 ISIS TE support
RFC 3786 Extending the Number of IS-IS LSP Fragments Beyond the 256 Limit
RFC 3787 Recommendations for Interoperable IP Networks using Intermediate System to Intermediate System (IS-IS)
RFC 3847 Restart signaling for IS-IS
RFC 4251 The Secure Shell (SSH) Protocol Architecture

RFC 4762 Virtual Private LAN Service (VPLS) Using Label Distribution Protocol (LDP) Signaling
RFC 5036 LDP Specification

Network management

IEEE 802.1AB Link Layer Discovery Protocol (LLDP)
RFC 1155 Structure of Management Information
RFC 1157 SNMPv1
RFC 1448 Protocol Operations for version 2 of the Simple Network Management Protocol (SNMPv2)
RFC 2211 Controlled-Load Network
RFC 2819 Four groups of RMON: 1 (statistics), 2 (history), 3 (alarm) and 9 (events)
RFC 3176 sFlow
RFC 3411 SNMP Management Frameworks
RFC 3412 SNMPv3 Message Processing
RFC 3414 SNMPv3 User-based Security Model (USM)
RFC 3415 SNMPv3 View-based Access Control Model VACM)
ANSI/TIA-1057 LLDP Media Endpoint Discovery (LLDP-MED)

OSPF

RFC 1245 OSPF protocol analysis
RFC 1246 Experience with OSPF
RFC 1765 OSPF Database Overflow
RFC 1850 OSPFv2 Management Information Base (MIB), traps
RFC 2154 OSPF w/ Digital Signatures (Password, MD-5)
RFC 2328 OSPFv2
RFC 2370 OSPF Opaque LSA Option
RFC 3101 OSPF NSSA
RFC 3137 OSPF Stub Router Advertisement
RFC 3623 Graceful OSPF Restart
RFC 3630 Traffic Engineering Extensions to OSPFv2
RFC 4061 Benchmarking Basic OSPF Single Router Control Plane Convergence
RFC 4062 OSPF Benchmarking Terminology and Concepts
RFC 4063 Considerations When Using Basic OSPF Convergence Benchmarks
RFC 4222 Prioritized Treatment of Specific OSPF Version 2 Packets and Congestion Avoidance
RFC 4577 OSPF as the Provider/Customer Edge Protocol for BGP/MPLS IP Virtual Private Networks (VPNs)
RFC 4811 OSPF Out-of-Band LSDB Resynchronization
RFC 4812 OSPF Restart Signaling
RFC 4813 OSPF Link-Local Signaling
RFC 4940 IANA Considerations for OSPF

QoS/CoS

Technical Specifications

RFC 4486 Subcodes for BGP Cease Notification Message
RFC 4884 Extended ICMP to Support Multi-Part Messages
RFC 4941 Privacy Extensions for Stateless Address Autoconfiguration in IPv6
RFC 5130 A Policy Control Mechanism in IS-IS Using Administrative Tags

IP multicast

RFC 2236 IGMPv2
RFC 2283 Multiprotocol Extensions for BGP-4
RFC 2362 PIM Sparse Mode
RFC 3376 IGMPv3
RFC 3446 Anycast Rendezvous Point (RP) mechanism using Protocol Independent Multicast (PIM) and Multicast Source Discovery Protocol (MSDP)
RFC 3618 Multicast Source Discovery Protocol (MSDP)
RFC 3973 PIM Dense Mode
RFC 4541 Considerations for Internet Group Management Protocol (IGMP) and Multicast Listener Discovery (MLD) Snooping Switches
RFC 4601 Draft 10 PIM Sparse Mode
RFC 4604 Using Internet Group Management Protocol Version 3 (IGMPv3) and Multicast Listener Discovery Protocol Version 2 (MLDv2) for Source-Specific Multicast
RFC 4605 IGMP/MLD Proxying
RFC 4607 Source-Specific Multicast for IP
RFC 4610 Anycast-RP Using Protocol Independent Multicast (PIM)
RFC 5059 Bootstrap Router (BSR) Mechanism for Protocol Independent Multicast (PIM)

IPv6

RFC 1886 DNS Extension for IPv6
RFC 1887 IPv6 Unicast Address Allocation Architecture
RFC 1981 IPv6 Path MTU Discovery
RFC 2080 RIPng for IPv6
RFC 2081 RIPng Protocol Applicability Statement
RFC 2292 Advanced Sockets API for IPv6
RFC 2373 IPv6 Addressing Architecture
RFC 2375 IPv6 Multicast Address Assignments
RFC 2460 IPv6 Specification
RFC 2461 IPv6 Neighbor Discovery
RFC 2462 IPv6 Stateless Address Auto-configuration
RFC 2463 ICMPv6
RFC 2464 Transmission of IPv6 over Ethernet Networks
RFC 2473 Generic Packet Tunneling in IPv6
RFC 2526 Reserved IPv6 Subnet Anycast

IEEE 802.1P (CoS)
RFC 1349 Type of Service in the Internet Protocol Suite
RFC 2211 Specification of the Controlled-Load Network Element Service
RFC 2212 Guaranteed Quality of Service
RFC 2474 DSCP DiffServ
RFC 2475 DiffServ Architecture
RFC 2597 DiffServ Assured Forwarding (AF)
RFC 2598 DiffServ Expedited Forwarding (EF)

Security

IEEE 802.1X Port Based Network Access Control
RFC 1321 The MD5 Message-Digest Algorithm
RFC 1334 PPP Authentication Protocols (PAP)
RFC 1492 TACACS+
RFC 1994 PPP Challenge Handshake Authentication Protocol (CHAP)
RFC 2082 RIP-2 MD5 Authentication
RFC 2104 Keyed-Hashing for Message Authentication
RFC 2408 Internet Security Association and Key Management Protocol (ISAKMP)
RFC 2409 The Internet Key Exchange (IKE)
RFC 2716 PPP EAP TLS Authentication Protocol
RFC 2865 RADIUS Authentication
RFC 2866 RADIUS Accounting
RFC 2867 RADIUS Accounting Modifications for Tunnel Protocol Support
RFC 2868 RADIUS Attributes for Tunnel Protocol Support
RFC 2869 RADIUS Extensions
Access Control Lists (ACLs)
Guest VLAN for 802.1x
MAC Authentication
Port Security
SSHv1/SSHv2 Secure Shell

VPN

RFC 2403 - HMAC-MD5-96
RFC 2404 - HMAC-SHA1-96
RFC 2405 - DES-CBC Cipher algorithm
RFC 2407 - Domain of interpretation
RFC 2547 BGP/MPLS VPNs
RFC 2917 A Core MPLS IP VPN Architecture
RFC 3947 - Negotiation of NAT-Traversal in the IKE
RFC 4302 - IP Authentication Header (AH)
RFC 4303 - IP Encapsulating Security Payload (ESP)

IPsec

RFC 1828 IP Authentication using Keyed MD5
RFC 1829 The ESP DES-CBC Transform
RFC 2085 HMAC-MD5 IP Authentication with Replay Prevention

Technical Specifications

Addresses

RFC 2529 Transmission of IPv6 Packets over IPv4

RFC 2545 Use of MP-BGP-4 for IPv6

RFC 2553 Basic Socket Interface Extensions for IPv6

RFC 2710 Multicast Listener Discovery (MLD) for IPv6

RFC 2740 OSPFv3 for IPv6

RFC 2767 Dual stacks IPv4 & IPv6

RFC 2893 Transition Mechanisms for IPv6 Hosts and Routers

RFC 3056 Connection of IPv6 Domains via IPv4 Clouds

RFC 3307 IPv6 Multicast Address Allocation

RFC 3315 DHCPv6 (client and relay)

RFC 3484 Default Address Selection for IPv6

RFC 3513 IPv6 Addressing Architecture

RFC 3736 Stateless Dynamic Host Configuration Protocol (DHCP) Service for IPv6

RFC 3810 MLDv2 for IPv6

RFC 4214 Intra-Site Automatic Tunnel Addressing Protocol (ISATAP)

RFC 4861 IPv6 Neighbor Discovery

RFC 4862 IPv6 Stateless Address Auto-configuration

RFC 2401 IP Security Architecture

RFC 2402 IP Authentication Header

RFC 2406 IP Encapsulating Security Payload

RFC 2410 - The NULL Encryption Algorithm and its use with IPsec

RFC 2411 IP Security Document Roadmap

Accessory Product Details

NOTE: Details are not available for all accessories. The following specifications were available at the time of publication.

HP 7500 48-port 100BASE-FX Module (JD197B)	Ports	48 SFP 100BASE-FX ports (IEEE 802.3u Type 100BASE-FX); Duplex: full only	
	Physical characteristics	Dimensions	13.98(d) x 14.84(w) x 1.57(h) in. (35.5 x 37.7 x 4 cm)
		Weight	6.72 lb. (3.05 kg)
Services	Refer to the HP website at www.hp.com/networking/services for details on the service-level descriptions and product numbers. For details about services and response times in your area, please contact your local HP sales office.		
HP 7500 48-port 10/100BASE-T Module (JD198B)	Ports	48 RJ-45 autosensing 10/100 PoE ports (IEEE 802.3 Type 10BASE-T, IEEE 802.3u Type 100BASE-TX, IEEE 802.3af PoE); Duplex: half or full	
	Physical characteristics	Dimensions	13.98(d) x 14.84(w) x 1.57(h) in. (35.5 x 37.7 x 4 cm)
		Weight	6.37 lb. (2.89 kg)
Services	Refer to the HP website at www.hp.com/networking/services for details on the service-level descriptions and product numbers. For details about services and response times in your area, please contact your local HP sales office.		
HP 7500 48-port Gig-T PoE-ready Module (JD199B)	Ports	48 RJ-45 autosensing 10/100/1000 PoE ports (IEEE 802.3 Type 10BASE-T, IEEE 802.3u Type 100BASE-TX, IEEE 802.3ab Type 1000BASE-T, IEEE 802.3af PoE); Duplex: 10BASE-T/100BASE-TX: half or full; 1000BASE-T: full only	
	Physical characteristics	Dimensions	13.98(d) x 14.84(w) x 1.57(h) in. (35.5 x 37.7 x 4 cm)
		Weight	6.81 lb. (3.09 kg)
Services	Refer to the HP website at www.hp.com/networking/services for details on the service-level descriptions and product numbers. For details about services and response times in your area, please contact your local HP sales office.		
HP 7500 2-port 10GbE XFP Module (JD201A)	Ports	2 XFP 10-GbE ports; Duplex: full only	
	Physical characteristics	Dimensions	13.98(d) x 14.84(w) x 1.57(h) in. (35.5 x 37.7 x 4 cm)
		Weight	6.5 lb. (2.95 kg)
Services	Refer to the HP website at www.hp.com/networking/services for details on the service-level descriptions and product numbers. For details about services and response times in your area, please contact your local HP sales office.		
HP 7500 24-port GbE SFP Module (JD203B)	Ports	24 SFP 100/1000 Mbps ports	
	Physical characteristics	Dimensions	13.98(d) x 14.84(w) x 1.57(h) in. (35.5 x 37.7 x 4 cm)
		Weight	6.13 lb. (2.78 kg)
Services	Refer to the HP website at www.hp.com/networking/services for details on the service-level descriptions and product numbers. For details about services and response times in your area, please contact your local HP sales office.		

Accessory Product Details

sales office.

HP 7500 24-port Gig-T Module (JD204B)	Ports	24 RJ-45 autosensing 10/100/1000 ports (IEEE 802.3 Type 10BASE-T, IEEE 802.3u Type 100BASE-TX, IEEE 802.3ab Type 1000BASE-T); Duplex: 10BASE-T/100BASE-TX: half or full; 1000BASE-T: full only	
	Physical characteristics	Dimensions	13.98(d) x 14.84(w) x 1.57(h) in. (35.5 x 37.7 x 4 cm)
		Weight	6 lb. (2.72 kg)
	Services	Refer to the HP website at www.hp.com/networking/services for details on the service-level descriptions and product numbers. For details about services and response times in your area, please contact your local HP sales office.	

HP 7500 24-port GbE SFP / 2-port 10GbE XFP Module (JD205A)	Ports	24 SFP 100/1000 Mbps ports 2 XFP 10-GbE ports; Duplex: full only	
	Physical characteristics	Dimensions	13.98(d) x 14.84(w) x 1.57(h) in. (35.5 x 37.7 x 4 cm)
		Weight	6.5 lb. (2.95 kg)
	Services	Refer to the HP website at www.hp.com/networking/services for details on the service-level descriptions and product numbers. For details about services and response times in your area, please contact your local HP sales office.	

HP 7500 12-port GbE SFP Module (JD207A)	Ports	12 SFP 100/1000 Mbps ports	
	Physical characteristics	Dimensions	13.98(d) x 1.18(w) x 1.57(h) in. (35.5 x 3 x 4 cm)
		Weight	5.86 lb. (2.66 kg)
	Services	Refer to the HP website at www.hp.com/networking/services for details on the service-level descriptions and product numbers. For details about services and response times in your area, please contact your local HP sales office.	

HP 7500 24-port Gig-T / 2-port 10GbE XFP Module (JD206A)	Ports	24 RJ-45 autosensing 10/100/1000 ports (IEEE 802.3 Type 10BASE-T, IEEE 802.3u Type 100BASE-TX, IEEE 802.3ab Type 1000BASE-T); Duplex: 10BASE-T/100BASE-TX: half or full; 1000BASE-T: full only 2 XFP 10-GbE ports; Duplex: full only	
	Physical characteristics	Dimensions	13.98(d) x 14.84(w) x 1.57(h) in. (35.5 x 37.7 x 4 cm)
		Weight	6.44 lb. (2.92 kg)
	Services	Refer to the HP website at www.hp.com/networking/services for details on the service-level descriptions and product numbers. For details about services and response times in your area, please contact your local HP sales office.	

HP 7500 48-port Gig-T Module (JD210A)	Ports	48 RJ-45 autosensing 10/100/1000 PoE ports (IEEE 802.3 Type 10BASE-T, IEEE 802.3u Type 100BASE-TX, IEEE 802.3ab Type 1000BASE-T, IEEE 802.3af PoE); Duplex: 10BASE-T/100BASE-TX: half or full; 1000BASE-T: full only	
	Physical characteristics	Dimensions	13.98(d) x 14.84(w) x 1.57(h) in. (35.5 x 37.7 x 4 cm)
		Weight	6.81 lb. (3.09 kg)

Accessory Product Details

Services Refer to the HP website at www.hp.com/networking/services for details on the service-level descriptions and product numbers. For details about services and response times in your area, please contact your local HP sales office.

HP 7500 48-port GbE SFP Module (JD211B)

Ports 48 SFP 100/1000 Mbps ports

Physical characteristics

Dimensions 13.98(d) x 14.84(w) x 1.57(h) in. (35.5 x 37.7 x 4 cm)

Weight 6.7 lb. (3.04 kg)

Services Refer to the HP website at www.hp.com/networking/services for details on the service-level descriptions and product numbers. For details about services and response times in your area, please contact your local HP sales office.

HP 7500 24-port GbE SFP Module with 8 Combo Ports (JD223A)

Ports 16 SFP 100/1000 Mbps ports
8 dual-personality ports; 1000M Combo ports (SFP or RJ-45)

Physical characteristics

Dimensions 13.98(d) x 14.84(w) x 1.57(h) in. (35.5 x 37.7 x 4 cm)

Weight 6.11 lb. (2.77 kg)

Services Refer to the HP website at www.hp.com/networking/services for details on the service-level descriptions and product numbers. For details about services and response times in your area, please contact your local HP sales office.

HP 7500 40-port Gig-T / 8-port SFP PoE-ready Module (JD228B)

Ports 40 RJ-45 autosensing 10/100/1000 PoE ports (IEEE 802.3 Type 10BASE-T, IEEE 802.3u Type 100BASE-TX, IEEE 802.3ab Type 1000BASE-T, IEEE 802.3af PoE); Duplex: 10BASE-T/100BASE-TX: half or full; 1000BASE-T: full only
8 SFP 100/1000 Mbps ports

Physical characteristics

Dimensions 13.98(d) x 14.84(w) x 1.57(h) in. (35.5 x 37.7 x 4 cm)

Weight 6.66 lb. (3.02 kg)

Services Refer to the HP website at www.hp.com/networking/services for details on the service-level descriptions and product numbers. For details about services and response times in your area, please contact your local HP sales office.

HP 7500 8-port 10G SFP+ Module (JF290A)

Ports 8 SFP+ 10-GbE ports; Duplex: full only

Physical characteristics

Dimensions 13.98(d) x 14.84(w) x 1.57(h) in. (35.5 x 37.7 x 4 cm)

Weight 6.97 lb. (3.16 kg)

Notes The module (JF290A) only support 10-GbE SFP+ transceiver, not support 1GbE SFP transceiver.

Services Refer to the HP website at www.hp.com/networking/services for details on the service-level descriptions and product numbers. For details about services and response times in your area, please contact your local HP sales office.

HP 7500 20-port Gig-T / 4-port GbE Combo PoE-upgradable SC Module

Ports 20 RJ-45 auto-negotiating 10/100/1000 PoE ports (IEEE 802.3 Type 10BASE-T, IEEE 802.3u Type 100BASE-TX, IEEE 802.3ab Type 1000BASE-T, IEEE 802.3af PoE); Duplex: 10BASE-T/100BASE-TX: half or full; 1000BASE-

Accessory Product Details

(JC669A)	Physical characteristics	<p>T: full only 4 dual-personality ports; Each composed of a 10/100/1000Base-T Gigabit Ethernet port and an SFP port, which cannot be simultaneously used</p> <p>Dimensions 13.98(d) x 14.84(w) x 1.57(h) in. (35.5 x 37.7 x 4 cm)</p>
	Services	<p>Weight 6.17 lb. (2.8 kg)</p> <p>Refer to the HP website at www.hp.com/networking/services for details on the service-level descriptions and product numbers. For details about services and response times in your area, please contact your local HP sales office.</p>
HP 7500 8-port 10GbE XFP Extended Module (JD191A)	Ports Physical characteristics	<p>8 XFP 10-GbE ports; Duplex: full only</p> <p>Dimensions 13.98(d) x 14.84(w) x 1.57(h) in. (35.5 x 37.7 x 4 cm)</p>
	Services	<p>Weight 7.12 lb. (3.23 kg)</p> <p>Refer to the HP website at www.hp.com/networking/services for details on the service-level descriptions and product numbers. For details about services and response times in your area, please contact your local HP sales office.</p>
HP 7500 48-port Gig-T PoE+ Extended Module (JD229B)	Ports Physical characteristics	<p>48 RJ-45 autosensing 10/100/1000 PoE+ ports (IEEE 802.3 Type 10BASE-T, IEEE 802.3u Type 100BASE-TX, IEEE 802.3ab Type 1000BASE-T, IEEE 802.3at PoE+); Duplex: 10BASE-T/100BASE-TX: half or full; 1000BASE-T: full only</p> <p>Dimensions 13.98(d) x 14.84(w) x 1.57(h) in. (35.5 x 37.7 x 4 cm)</p>
	Services	<p>Weight 7.3 lb. (3.31 kg)</p> <p>Refer to the HP website at www.hp.com/networking/services for details on the service-level descriptions and product numbers. For details about services and response times in your area, please contact your local HP sales office.</p>
HP 7500 24-port GbE SFP / 2-port 10GbE XFP Extended Module (JD230A)	Ports Physical characteristics	<p>16 SFP 1000 Mbps ports 8 dual-personality ports; 1000M Combo ports (SFP or RJ-45) 2 XFP 10-GbE ports; Duplex: full only</p> <p>Dimensions 13.98(d) x 14.84(w) x 1.57(h) in. (35.5 x 37.7 x 4 cm)</p>
	Services	<p>Weight 6.79 lb. (3.08 kg)</p> <p>Refer to the HP website at www.hp.com/networking/services for details on the service-level descriptions and product numbers. For details about services and response times in your area, please contact your local HP sales office.</p>
HP 7500 24-port GbE SFP Extended Module (JD234A)	Ports Physical characteristics	<p>16 SFP 100/1000 Mbps ports 8 dual-personality ports; 1000M Combo ports (SFP or RJ-45)</p> <p>Dimensions 13.98(d) x 14.84(w) x 1.57(h) in. (35.5 x 37.7 x 4 cm)</p>
	Services	<p>Weight 6.64 lb. (3.01 kg)</p> <p>Refer to the HP website at www.hp.com/networking/services for details on the service-level descriptions and product numbers. For details about services and response times in your area, please contact your local HP sales office.</p>

Accessory Product Details

sales office.

HP 7500 4-port 10GbE XFP Extended Module (JD235A)	Ports	4 XFP 10-GbE ports; Duplex: full only				
	Physical characteristics	<table border="0"> <tr> <td>Dimensions</td> <td>13.98(d) x 14.84(w) x 1.57(h) in. (35.5 x 37.7 x 4 cm)</td> </tr> <tr> <td>Weight</td> <td>6.46 lb. (2.93 kg)</td> </tr> </table>	Dimensions	13.98(d) x 14.84(w) x 1.57(h) in. (35.5 x 37.7 x 4 cm)	Weight	6.46 lb. (2.93 kg)
	Dimensions	13.98(d) x 14.84(w) x 1.57(h) in. (35.5 x 37.7 x 4 cm)				
Weight	6.46 lb. (2.93 kg)					
Services	Refer to the HP website at www.hp.com/networking/services for details on the service-level descriptions and product numbers. For details about services and response times in your area, please contact your local HP sales office.					

HP 7500 2-port 10GbE XFP Extended Module (JD236A)	Ports	2 XFP 10-GbE ports; Duplex: full only				
	Physical characteristics	<table border="0"> <tr> <td>Dimensions</td> <td>13.98(d) x 14.84(w) x 1.57(h) in. (35.5 x 37.7 x 4 cm)</td> </tr> <tr> <td>Weight</td> <td>6.46 lb. (2.93 kg)</td> </tr> </table>	Dimensions	13.98(d) x 14.84(w) x 1.57(h) in. (35.5 x 37.7 x 4 cm)	Weight	6.46 lb. (2.93 kg)
	Dimensions	13.98(d) x 14.84(w) x 1.57(h) in. (35.5 x 37.7 x 4 cm)				
Weight	6.46 lb. (2.93 kg)					
Services	Refer to the HP website at www.hp.com/networking/services for details on the service-level descriptions and product numbers. For details about services and response times in your area, please contact your local HP sales office.					

HP 7500 48-port GbE SFP Extended Module (JD237A)	Ports	48 SFP 100/1000 Mbps ports				
	Physical characteristics	<table border="0"> <tr> <td>Dimensions</td> <td>13.98(d) x 14.84(w) x 1.57(h) in. (35.5 x 37.7 x 4 cm)</td> </tr> <tr> <td>Weight</td> <td>7.16 lb. (3.25 kg)</td> </tr> </table>	Dimensions	13.98(d) x 14.84(w) x 1.57(h) in. (35.5 x 37.7 x 4 cm)	Weight	7.16 lb. (3.25 kg)
	Dimensions	13.98(d) x 14.84(w) x 1.57(h) in. (35.5 x 37.7 x 4 cm)				
Weight	7.16 lb. (3.25 kg)					
Services	Refer to the HP website at www.hp.com/networking/services for details on the service-level descriptions and product numbers. For details about services and response times in your area, please contact your local HP sales office.					

HP 7500 48-port GbE SFP Enhanced Module (JD221A)	Ports	48 SFP 100/1000 Mbps ports				
	Physical characteristics	<table border="0"> <tr> <td>Dimensions</td> <td>13.98(d) x 14.84(w) x 1.57(h) in. (35.5 x 37.7 x 4 cm)</td> </tr> <tr> <td>Weight</td> <td>7.16 lb. (3.25 kg)</td> </tr> </table>	Dimensions	13.98(d) x 14.84(w) x 1.57(h) in. (35.5 x 37.7 x 4 cm)	Weight	7.16 lb. (3.25 kg)
	Dimensions	13.98(d) x 14.84(w) x 1.57(h) in. (35.5 x 37.7 x 4 cm)				
Weight	7.16 lb. (3.25 kg)					
Services	Refer to the HP website at www.hp.com/networking/services for details on the service-level descriptions and product numbers. For details about services and response times in your area, please contact your local HP sales office.					

HP 7500 24-port GbE SFP Enhanced Module (JD231A)	Ports	16 XFP 100/1000 Mbps ports 8 dual-personality ports; 1000M Combo ports (SFP or RJ-45)				
	Physical characteristics	<table border="0"> <tr> <td>Dimensions</td> <td>13.98(d) x 14.84(w) x 1.57(h) in. (35.5 x 37.7 x 4 cm)</td> </tr> <tr> <td>Weight</td> <td>6.7 lb. (3.04 kg)</td> </tr> </table>	Dimensions	13.98(d) x 14.84(w) x 1.57(h) in. (35.5 x 37.7 x 4 cm)	Weight	6.7 lb. (3.04 kg)
	Dimensions	13.98(d) x 14.84(w) x 1.57(h) in. (35.5 x 37.7 x 4 cm)				
Weight	6.7 lb. (3.04 kg)					
Services	Refer to the HP website at www.hp.com/networking/services for details on the service-level descriptions and product numbers. For details about services and response times in your area, please contact your local HP sales office.					

HP 7500 24-port GbE SFP Enhanced Module	Ports	16 XFP 100/1000 Mbps ports 8 dual-personality ports; 1000M Combo ports (SFP or RJ-45)
--	--------------	--

Accessory Product Details

<p>(JD231A)</p>	<p>Physical characteristics</p>	<p>Dimensions</p>	<p>13.98(d) x 14.84(w) x 1.57(h) in. (35.5 x 37.7 x 4 cm)</p>
		<p>Weight</p>	<p>6.7 lb. (3.04 kg)</p>
	<p>Services</p>	<p>Refer to the HP website at www.hp.com/networking/services for details on the service-level descriptions and product numbers. For details about services and response times in your area, please contact your local HP sales office.</p>	
<p>HP 7500 2-port 10GbE XFP Enhanced Module (JD233A)</p>	<p>Ports</p> <p>Physical characteristics</p>	<p>2 XFP 10-GbE ports; Duplex: full only</p> <p>Dimensions</p>	<p>13.98(d) x 14.84(w) x 1.57(h) in. (35.5 x 37.7 x 4 cm)</p>
		<p>Weight</p>	<p>6.46 lb. (2.93 kg)</p>
	<p>Services</p>	<p>Refer to the HP website at www.hp.com/networking/services for details on the service-level descriptions and product numbers. For details about services and response times in your area, please contact your local HP sales office.</p>	
<p>HP X124 1G SFP LC LH40 1310nm Transceiver (JD061A)</p> <p>A small form-factor pluggable SFP Gigabit LH40 transceiver that provides a full duplex Gigabit solution up to 40km on a single-mode fiber.</p>	<p>Ports</p> <p>Connectivity</p> <p>Physical characteristics</p> <p>Electrical characteristics</p> <p>Cabling</p>	<p>1 LC 1000Base-LH port (no IEEE standard exists for 1550 nm optics)</p> <p>Connector type</p> <p>Wavelength</p> <p>Dimensions</p> <p>Full configuration weight</p> <p>Power consumption typical</p> <p>Power consumption maximum</p> <p>Cable type:</p> <p>Single-mode fiber optic, complying with ITU-T G.652;</p> <p>Maximum distance:</p> <ul style="list-style-type: none"> 40km distance <p>Fiber type</p>	<p>LC</p> <p>1310 nm</p> <p>2.17(d) x 0.6(w) x 0.46(h) in. (5.51 x 1.52 x 1.17 cm)</p> <p>0.04 lb. (0.02 kg)</p> <p>0.8 W</p> <p>1.0 W</p> <p>Single Mode</p> <p>Refer to the HP website at www.hp.com/networking/services for details on the service-level descriptions and product numbers. For details about services and response times in your area, please contact your local HP sales office.</p>
<p>HP X120 1G SFP LC LH40 1550nm Transceiver (JD062A)</p> <p>A small form-factor pluggable (SFP) Gigabit LH40 transceiver that provides a full-duplex Gigabit solution up to 40 km on a single mode fiber.</p>	<p>Ports</p> <p>Connectivity</p> <p>Physical characteristics</p> <p>Electrical characteristics</p> <p>Cabling</p>	<p>1 LC 1000BASE-LH port (no IEEE standard exists for 1550 nm optics)</p> <p>Connector type</p> <p>Wavelength</p> <p>Dimensions</p> <p>Full configuration weight</p> <p>Power consumption typical</p> <p>Power consumption maximum</p> <p>Cable type:</p>	<p>LC</p> <p>1550 nm</p> <p>2.17(d) x 0.6(w) x 0.46(h) in. (5.51 x 1.52 x 1.17 cm)</p> <p>0.04 lb. (0.02 kg)</p> <p>0.8 W</p> <p>1.0 W</p>

Accessory Product Details

Single-mode fiber optic, complying with ITU-T G.652;

Maximum distance:

- 40km distance

Services	Fiber type	Single Mode
	Refer to the HP website at www.hp.com/networking/services for details on the service-level descriptions and product numbers. For details about services and response times in your area, please contact your local HP sales office.	

HP X125 1G SFP LC LH70 Transceiver (JD063B)

A small form-factor pluggable (SFP) Gigabit LH70 transceiver that provides a full-duplex Gigabit solution up to 70km on a single-mode fiber.

Ports	1 LC 1000BASE-LH port (no IEEE standard exists for 1550 nm optics)	
Connectivity	Connector type	LC
	Wavelength	1550 nm
Physical characteristics	Dimensions	2.17(d) x 0.6(w) x 0.46(h) in. (5.51 x 1.52 x 1.17 cm)
	Full configuration weight	0.04 lb. (0.02 kg)
Electrical characteristics	Power consumption typical	0.8 W
	Power consumption maximum	1.0 W
Cabling	Cable type: Single-mode fiber optic, complying with ITU-T G.652;	
	Maximum distance: • 70km	
Services	Fiber type	Single Mode
	Refer to the HP website at www.hp.com/networking/services for details on the service-level descriptions and product numbers. For details about services and response times in your area, please contact your local HP sales office.	

HP X125 1G SFP RJ45 T Transceiver (JD089B)

A small form factor pluggable (SFP) Gigabit 1000Base-T transceiver that provides a full duplex Gigabit solution up to 100m on a Cat-5+ cable.

Ports	1 RJ-45 1000BASE-T port (IEEE 802.3ab Type 1000BASE-T)	
Connectivity	Connector type	RJ-45
Physical characteristics	Dimensions	2.71(d) x 0.54(w) x 0.55(h) in. (6.88 x 1.37 x 1.4 cm)
	Full configuration weight	0.07 lb. (0.03 kg)
Electrical characteristics	Power consumption typical	0.8 W
	Power consumption maximum	1.0 W
Cabling	Cable type: 1000BASE-T: Category 5 (5E or better recommended), 100 Û differential 4-pair unshielded twisted pair (UTP) or shielded twisted pair (STP) balanced, complying with IEEE 802.3ab 1000BASE-T;	
	Maximum distance: • 100m	
Services	Refer to the HP website at www.hp.com/networking/services for details on the service-	

Accessory Product Details

level descriptions and product numbers. For details about services and response times in your area, please contact your local HP sales office.

<p>HP X120 1G SFP LC BX10-U Transceiver (JD098B)</p> <p>A small form-factor pluggable (SFP) Gigabit LX-BX10-U transceiver that provides a full duplex Gigabit solution up to 10km on a single mode cable.</p>	Ports	1 LC 1000BASE-BX10 port (IEEE 802.3ah Type 1000BASE-BX10-U); Duplex: full only		
	Connectivity	Connector type	LC	
	Physical characteristics	Dimensions	2.17(d) x 0.6(w) x 0.46(h) in. (5.51 x 1.52 x 1.17 cm)	
	Electrical characteristics	Full configuration weight	0.04 lb. (0.02 kg)	
		Power consumption typical	0.8 W	
		Power consumption maximum	1.0 W	
	Cabling	Maximum distance: • 10km		
		Fiber type	Single Mode	
	Notes	TX 1310nm RX 1490nm		
	Services	Refer to the HP website at: www.hp.com/networking/services for details on the service-level descriptions and product numbers. For details about services and response times in your area, please contact your local HP sales office.		

<p>HP X120 1G SFP LC BX10-D Transceiver (JD099B)</p> <p>A small form-factor pluggable (SFP) Gigabit LX-BX10-D transceiver that provides a full duplex Gigabit solution up to 10km on a single mode cable.</p>	Ports	1 LC 1000BASE-BX10 port (IEEE 802.3ah Type 1000BASE-BX10-D); Duplex: full only		
	Connectivity	Connector type	LC	
	Physical characteristics	Dimensions	2.17(d) x 0.6(w) x 0.46(h) in. (5.51 x 1.52 x 1.17 cm)	
	Electrical characteristics	Full configuration weight	0.04 lb. (0.02 kg)	
		Power consumption typical	0.8 W	
		Power consumption maximum	1.0 W	
	Cabling	Maximum distance: • Up to 10km		
		Fiber type	Single Mode	
	Notes	TX 1490nm RX 1310nm		
	Services	Refer to the HP website at www.hp.com/networking/services for details on the service-level descriptions and product numbers. For details about services and response times in your area, please contact your local HP sales office.		

<p>HP X120 1G SFP LC LH100 Transceiver (JD103A)</p> <p>A small form factor pluggable (SFP) Gigabit LH100 transceiver that provides a full-duplex Gigabit solution up to 100km on a single mode</p>	Ports	1 LC 1000BASE-LH port (no IEEE standard exists for 1550 nm optics)		
	Connectivity	Connector type	LC	
		Wavelength	1550 nm	
	Electrical characteristics	Power consumption typical	0.8 W	
		Power consumption maximum	1.0 W	
Cabling	Cable type:			

Accessory Product Details

fiber.	Single-mode fiber optic, complying with ITU-T G.652;
	<p>Maximum distance:</p> <ul style="list-style-type: none"> • Up to 100km
	<p>Fiber type Single Mode</p>
Services	Refer to the HP website at www.hp.com/networking/services for details on the service-level descriptions and product numbers. For details about services and response times in your area, please contact your local HP sales office.

HP X120 1G SFP LC SX Transceiver (JD118B)	Ports	1 LC 1000BASE-SX port
A small form-factor pluggable (SFP) Gigabit SX transceiver that provides a full-duplex Gigabit solution up to 550m on a Multimode fiber.	Connectivity	<p>Connector type LC</p> <p>Wavelength 850 nm</p>
	Physical characteristics	<p>Dimensions 2.17(d) x 0.6(w) x 0.46(h) in. (5.51 x 1.52 x 1.17 cm)</p> <p>Full configuration weight 0.04 lb. (0.02 kg)</p>
	Electrical characteristics	<p>Power consumption typical 0.8 W</p> <p>Power consumption maximum 1.0 W</p>
	Cabling	<p>Maximum distance:</p> <ul style="list-style-type: none"> • FDDI Grade distance = 220m • OM1 = 275m • OM2 = 500m • OM3 = Not Specified by standard <p>Cable length up to 550m</p> <p>Fiber type Multi Mode</p>
	Services	Refer to the HP website at www.hp.com/networking/services for details on the service-level descriptions and product numbers. For details about services and response times in your area, please contact your local HP sales office.

HP X120 1G SFP LC LX Transceiver (JD119B)	Ports	1 SFP 1000BASE-LX port (IEEE 802.3z Type 1000BASE-LX)
A small form-factor pluggable (SFP) Gigabit LX transceiver that provides a full duplex Gigabit solution up to 550m on MMF or 10Km on SMF	Connectivity	<p>Connector type LC</p> <p>Wavelength 1300 nm</p>
	Physical characteristics	<p>Dimensions 2.17(d) x 0.6(w) x 0.46(h) in. (5.51 x 1.52 x 1.17 cm)</p> <p>Full configuration weight 0.04 lb. (0.02 kg)</p>
	Electrical characteristics	<p>Power consumption typical 0.8 W</p> <p>Power consumption maximum 1.0 W</p>
	Cabling	<p>Cable type:</p> <p>Either single mode or multimode;</p> <p>Maximum distance:</p> <ul style="list-style-type: none"> • 550m for Multimode • 10km for Singlemode <p>Fiber type Both</p>

Accessory Product Details

Services

Refer to the HP website at www.hp.com/networking/services for details on the service-level descriptions and product numbers. For details about services and response times in your area, please contact your local HP sales office.

HP 50 m Multimode OM3 LC/LC Optical Cable (AJ839A) **Cabling**

Cable type:

50/125 μm (core/cladding) diameter, multimode fiber optic, with effective modal bandwidth of 2000 MHz/km as detailed in TIA-492AAAC for distances of up to 300 m;

Maximum distance:

10Gbps Transfer Rate (Ethernet): 300m

Notes

Cable Specs: Tight buffered duplex fiber optic multimode OM3 50/125 μm fiber optic cable and Ethernet assembly with LC duplex connectors on one end and LC duplex connectors on other end.

- Dimensions: Core diameter: $50 \pm 3.0\mu\text{m}$ Cladding diameter: $125 \pm 2.0\mu\text{m}$ Coating diameter: $245 \pm 10\mu\text{m}$
- Optical Glass Bandwidth: For LED sources: 1500/500 MHz-km @850/1300nm.
- Optical Glass: For Laser sources: 2000/500 MHz-km @850/1300nm. VCSEL Laser sources: Shall achieve 600 / 600 meters @850/1300nm for Gigabit Ethernet compliant links.
- CABLE: The cable is duplex zipcord graded index 50/125 μm multimode optical fiber. The cable is designed to work in both the 850 and 1300 nm wavelength windows.
- BULK CABLE & CABLE ASSEMBLY CONFIGURATION:
- Jacket Material: Riser Grade - Low Smoke Zero Halogen thermoplastic.
- Jacket Color: Aqua for OM3 multimode per TIA 598
- Boot Color: White
- Insertion Loss: less than 0.5 dB @ 850 with LED source, 0.003 dB/M added for lengths > 30 meters.
- Maximum Cable attenuation: 3.0 dB/km @ 850 nm, 1.0 dB/Km @ 1310 nm @ 23°C as tested in accordance with EIA 455-46.
- Weight: Air Packed Weight: 1 LB Net Weight: 0.454Kg

Services

Refer to the HP website at www.hp.com/networking/services for details on the service-level descriptions and product numbers. For details about services and response times in your area, please contact your local HP sales office.

HP 30 m Multimode OM3 LC/LC Optical Cable (AJ838A) **Cabling**

Cable type:

50/125 μm (core/cladding) diameter, multimode fiber optic, with effective modal bandwidth of 2000 MHz/km as detailed in TIA-492AAAC for distances of up to 300 m;

Maximum distance:

10Gbps Transfer Rate (Ethernet): 300m

Notes

Cable Specs: Tight buffered duplex fiber optic multimode OM3 50/125 μm fiber optic cable and Ethernet assembly with LC duplex connectors on one end and LC duplex connectors on other end.

Accessory Product Details

- Dimensions: Core diameter: 50 ± 3.0um Cladding diameter: 125 ± 2.0um Coating diameter: 245 ± 10um
- Optical Glass Bandwidth: For LED sources: 1500/500 MHz-km @850/1300nm.
- Optical Glass: For Laser sources: 2000/500 MHz-km @850/1300nm. VCSEL Laser sources: Shall achieve 600 / 600 meters @850/1300nm for Gigabit Ethernet compliant links.
- CABLE: The cable is duplex zipcord graded index 50/125um multimode optical fiber. The cable is designed to work in both the 850 and 1300 nm wavelength windows.
- BULK CABLE & CABLE ASSEMBLY CONFIGURATION:
- Jacket Material: Riser Grade - Low Smoke Zero Halogen thermoplastic.
- Jacket Color: Aqua for OM3 multimode per TIA 598
- Boot Color: White
- Insertion Loss: less than 0.5 dB @ 850 with LED source, 0.003 dB/M added for lengths > 30 meters.
- Maximum Cable attenuation: 3.0 dB/km @ 850 nm, 1.0 dB/Km @ 1310 nm @ 23°C as tested in accordance with EIA 455-46.
- Weight: Air Packed Weight: 1 LB Net Weight: 0.454Kg

Services

Refer to the HP website at www.hp.com/networking/services for details on the service-level descriptions and product numbers. For details about services and response times in your area, please contact your local HP sales office.

HP 15 m Multimode OM3 LC/LC Optical Cable (AJ837A)

Cabling

Cable type:

50/125 µm (core/cladding) diameter, multimode fiber optic, with effective modal bandwidth of 2000 MHz/km as detailed in TIA-492AAAC for distances of up to 300 m;

Maximum distance:

10Gbps Transfer Rate (Ethernet): 300m

Notes

Cable Specs: Tight buffered duplex fiber optic multimode OM3 50/125 um fiber optic cable and Ethernet assembly with LC duplex connectors on one end and LC duplex connectors on other end.

- Dimensions: Core diameter: 50 ± 3.0um Cladding diameter: 125 ± 2.0um Coating diameter: 245 ± 10um
- Optical Glass Bandwidth: For LED sources: 1500/500 MHz-km @850/1300nm.
- Optical Glass: For Laser sources: 2000/500 MHz-km @850/1300nm. VCSEL Laser sources: Shall achieve 600 / 600 meters @850/1300nm for Gigabit Ethernet compliant links.
- CABLE: The cable is duplex zipcord graded index 50/125um multimode optical fiber. The cable is designed to work in both the 850 and 1300 nm wavelength windows.
- BULK CABLE & CABLE ASSEMBLY CONFIGURATION:
- Jacket Material: Riser Grade - Low Smoke Zero Halogen thermoplastic.
- Jacket Color: Aqua for OM3 multimode per TIA 598
- Boot Color: White
- Insertion Loss: less than 0.5 dB @ 850 with LED source, 0.003

Accessory Product Details

dB/M added for lengths > 30 meters.

- Maximum Cable attenuation: 3.0 dB/km @ 850 nm, 1.0 dB/Km @ 1310 nm @ 23°C as tested in accordance with EIA 455-46.
- Weight: Air Packed Weight: 1 LB Net Weight: 0.454Kg

Services

Refer to the HP website at www.hp.com/networking/services for details on the service-level descriptions and product numbers. For details about services and response times in your area, please contact your local HP sales office.

HP 5 m Multimode OM3 LC/LC Optical Cable (AJ836A)

Cabling

Cable type:

50/125 µm core/cladding) diameter, multimode fiber optic, with effective modal bandwidth of 2000 MHz/km as detailed in TIA-492AAAC for distances of up to 300 m;

Maximum distance:

10Gbps Transfer Rate (Ethernet): 300m

Notes

Cable Specs: This specification defines the detail requirements for a tight buffered duplex fiber optic multimode OM3 50/125 µm fiber optic cable and Ethernet assembly with LC duplex connectors on one end and LC duplex connectors on other end.

- Dimensions: Core diameter: 50 ± 3.0µm Cladding diameter: 125 ± 2.0µm Coating diameter: 245 ± 10µm
- Optical Glass Bandwidth: For LED sources: 1500/500 MHz-km @850/1300nm.
- Optical Glass: For Laser sources: 2000/500 MHz-km @850/1300nm. VCSEL Laser sources: Shall achieve 600 / 600 meters @850/1300nm for Gigabit Ethernet compliant links.
- CABLE: The cable is duplex zipcord graded index 50/125µm multimode optical fiber. The cable is designed to work in both the 850 and 1300 nm wavelength windows.
- BULK CABLE & CABLE ASSEMBLY CONFIGURATION:
- Jacket Material: Riser Grade - Low Smoke Zero Halogen thermoplastic.
- Jacket Color: Aqua for OM3 multimode per TIA 598
- Boot Color: White
- Insertion Loss: less than 0.5 dB @ 850 with LED source, 0.003 dB/M added for lengths > 30 meters.
- Maximum Cable attenuation: 3.0 dB/km @ 850 nm, 1.0 dB/Km @ 1310 nm @ 23°C as tested in accordance with EIA 455-46.
- Weight: Air Packed Weight: 1 LB Net Weight: 0.454Kg

Services

Refer to the HP website at www.hp.com/networking/services for details on the service-level descriptions and product numbers. For details about services and response times in your area, please contact your local HP sales office.

HP 2 m Multimode OM3 LC/LC Optical Cable (AJ835A)

Cabling

Cable type:

50/125 µm (core/cladding) diameter, multimode fiber optic, with effective modal bandwidth of 2000 MHz/km as detailed in TIA-492AAAC for distances of up to 300 m;

Accessory Product Details

Notes	<p>Maximum distance: 10Gbps Transfer Rate (Ethernet): 300m</p> <p>Cable Specs: Tight buffered duplex fiber optic multimode OM3 50/125 μm fiber optic cable and Ethernet assembly with LC duplex connectors on one end and LC duplex connectors on other end.</p> <ul style="list-style-type: none"> • Dimensions: Core diameter: 50 \pm 3.0μm Cladding diameter: 125 \pm 2.0μm Coating diameter: 245 \pm 10μm • Optical Glass Bandwidth: For LED sources: 1500/500 MHz-km @850/1300nm. • Optical Glass: For Laser sources: 2000/500 MHz-km @850/1300nm. VCSEL Laser sources: Shall achieve 600 / 600 meters @850/1300nm for Gigabit Ethernet compliant links. • CABLE: The cable is duplex zipcord graded index 50/125μm multimode optical fiber. The cable is designed to work in both the 850 and 1300 nm wavelength windows. • BULK CABLE & CABLE ASSEMBLY CONFIGURATION: • Jacket Material: Riser Grade - Low Smoke Zero Halogen thermoplastic. • Jacket Color: Aqua for OM3 multimode per TIA 598 • Boot Color: White • Insertion Loss: less than 0.5 dB @ 850 with LED source, 0.003 dB/M added for lengths > 30 meters. • Maximum Cable attenuation: 3.0 dB/km @ 850 nm, 1.0 dB/Km @ 1310 nm @ 23°C as tested in accordance with EIA 455-46. • Weight: Air Packed Weight: 1 LB Net Weight: 0.454Kg
Services	<p>Refer to the HP website at www.hp.com/networking/services for details on the service-level descriptions and product numbers. For details about services and response times in your area, please contact your local HP sales office.</p>

HP 1 m Multimode OM3 LC/LC Optical Cable (AJ834A)	Cabling
--	----------------

Cable type:
50/125 μ m (core/cladding) diameter, multimode fiber optic, with effective modal bandwidth of 2000 MHz/km as detailed in TIA-492AAAC for distances of up to 300 m

Notes	<p>Maximum distance: 10Gbps Transfer Rate (Ethernet): 300m</p> <p>Cable Specs: Tight buffered duplex fiber optic multimode OM3 50/125 μm fiber optic cable and Ethernet assembly with LC duplex connectors on one end and LC duplex connectors on other end.</p> <ul style="list-style-type: none"> • Dimensions: Core diameter: 50 \pm 3.0μm Cladding diameter: 125 \pm 2.0μm Coating diameter: 245 \pm 10μm • Optical Glass Bandwidth: For LED sources: 1500/500 MHz-km @850/1300nm. • Optical Glass: For Laser sources: 2000/500 MHz-km @850/1300nm. VCSEL Laser sources: Shall achieve 600 / 600 meters @850/1300nm for Gigabit Ethernet compliant links. • CABLE: The cable is duplex zipcord graded index 50/125μm multimode optical fiber. The cable is designed to work in both the 850 and 1300 nm wavelength windows.
--------------	--

Accessory Product Details

- BULK CABLE & CABLE ASSEMBLY CONFIGURATION:
- Jacket Material: Riser Grade - Low Smoke Zero Halogen thermoplastic.
- Jacket Color: Aqua for OM3 multimode per TIA 598
- Boot Color: White
- Insertion Loss: less than 0.5 dB @ 850 with LED source, 0.003 dB/M added for lengths > 30 meters.
- Maximum Cable attenuation: 3.0 dB/km @ 850 nm, 1.0 dB/Km @ 1310 nm @ 23°C as tested in accordance with EIA 455-46.
- Weight: Air Packed Weight: 1 LB Net Weight: 0.454Kg

Services

Refer to the HP website at www.hp.com/networking/services for details on the service-level descriptions and product numbers. For details about services and response times in your area, please contact your local HP sales office.

HP 0.5 m Multimode OM3 Cabling LC/LC Optical Cable (AJ833A)

Cable type:

50/125 μ m (core/cladding) diameter, multimode fiber optic, with effective modal bandwidth of 2000 MHz/km as detailed in TIA-492AAAC for distances of up to 300 m

Maximum distance:

10Gbps Transfer Rate (Ethernet): 300m

Notes

Cable Specs: Tight buffered duplex fiber optic multimode OM3 50/125 μ m fiber optic cable and Ethernet assembly with LC duplex connectors on one end and LC duplex connectors on other end.

- Dimensions: Core diameter: 50 \pm 3.0 μ m Cladding diameter: 125 \pm 2.0 μ m Coating diameter: 245 \pm 10 μ m
- Optical glass: Bandwidth: For LED sources: 1500/500 MHz-km @850/1300nm.
- Optical glass: Bandwidth: For Laser sources: 2000/500 MHz-km @850/1300nm. VCSEL Laser sources: 600 / 600 meters @850/1300nm for Gigabit Ethernet compliant links.
- CABLE: The cable is duplex zipcord graded index 50/125 μ m multimode optical fiber and designed to work in both the 850 and 1300 nm wavelength windows.
- BULK CABLE & CABLE ASSEMBLY CONFIGURATION:
- Jacket Material: Riser Grade - Low Smoke Zero Halogen thermoplastic.
- Jacket Color: Aqua for OM3 multimode per TIA 598
- Boot Color: White
- Insertion Loss: less than 0.5 dB @ 850 with LED source, 0.003 dB/M added for lengths > 30 meters.
- Maximum Cable attenuation: 3.0 dB/km @ 850 nm, 1.0 dB/Km @ 1310 nm @ 23°C as tested in accordance with EIA 455-46.
- Weight: Air Packed Weight: 1 LB Net Weight: 0.454Kg

Services

Refer to the HP website at www.hp.com/networking/services for details on the service-level descriptions and product numbers. For details about services and response times in your area, please contact your local HP sales office.

Accessory Product Details

HP 1 m PremierFlex OM3+ Notes LC/LC Optical Cable (BK838A)

Cable Specs: Graded-index, "bendable" fiber optic multimode OM3+ 50/125um duplex cable and Ethernet assembly with LC duplex connectors on each end.

- Core Diameter: 50um ±3um, Cladding diameter: 125um ±2um; Coating diameter: 245 ± 10um
- Bandwidth: 3000 MHz-km @ 850nm (Laser)
- Jacket Color: Blue
- Jacket Material: Riser Grade – Low Smoke Zero Halogen (LSZH) thermoplastic
- Boot Color: White
- Outer Jacket Print: HP PremierFlex OM3+ Fiber Optic Cable, 50/125um, Type OFNR (UL), LSZH, cUL, OFN FT4, ROHS. Cable also has a longitudinal white stripe that runs the entire length of the cable.
- Insertion Loss: Less than 0.5dB @ 850nm with LED source, 0.003dB/m added for lengths >30m
- Maximum Cable Attenuation: 3.0 dB/km @ 850nm, 1.0 dB/km @ 1310nm @ 23°C as tested in accordance with EIA 455-45

Services

Refer to the HP website at www.hp.com/networking/services for details on the service-level descriptions and product numbers. For details about services and response times in your area, please contact your local HP sales office.

HP 10500/7500 20G Unified Wired-WLAN Module (JG639A)

Ports	1 RJ-45 serial console port (IEEE 802.3 Type 10BASE-T, IEEE 802.3u Type 100BASE-TX, IEEE 802.3ab Type 1000BASE-T); Duplex: 10BASE-T/100BASE-TX: half or full; 1000BASE-T: full only 1 RJ-45 out-of-band management port (IEEE 802.3 Type 10BASE-T, IEEE 802.3u Type 100BASE-TX, IEEE 802.3ab Type 1000BASE-T); Duplex: 10BASE-T/100BASE-TX: half or full; 1000BASE-T: full only	
Physical characteristics	Dimensions	15.71(w) x 13.98(d) x 1.57(h) in (39.9 x 35.5 x 4.0 cm) (1U height)
	Weight	7.98 lb (3.62 kg)
Memory and processor	Processor	Eight core @ 950 MHz, 1 GB compact flash, 2 GB DDR2 DIMM
Performance	Switch fabric speed	10 Gbps
	MAC address table size	24000 entries
Environment	Operating temperature	32°F to 113°F (0°C to 45°C)
	Operating relative humidity	5% to 95%, noncondensing
	Nonoperating/Storage temperature	-40°F to 158°F (-40°C to 70°C)
	Nonoperating/Storage relative humidity	5% to 95%, noncondensing
Electrical characteristics	Maximum heat dissipation	512 BTU/hr (540.16 kJ/hr)
	Maximum power rating	150 W
	Notes	Power consumption: 118 W-150 W
Safety	UL 60950-1; CAN/CSA 22.2 No. 60950-1; IEC 60950-1; EN 60950-1; FDA 21 CFR Subchapter J	
Emissions	EN 55022 Class A; CISPR 22 Class A; ICES-003 Class A; AS/NZS CISPR 22 Class A; EN 61000-3-2; EN 61000-3-3; VCCI-3 CLASS A; VCCI-4 CLASS A; ETSI EN 300 386; FCC Part 15 (CFR 47) CLASS A	
Immunity	EN	EN 55024, CISPR24 & ETSI EN 300 386
Management	IMC - Intelligent Management Center; command-line interface; Web browser; SNMP Manager; Telnet; HTTPS; RMON1; FTP; in-line and out-of-band; IEEE 802.3 Ethernet MIB; Ethernet Interface MIB	

Accessory Product Details

Features

For use in HP 10500 Switch Series and HP 7500 Switch Series
 Default supported APs: 128
 Maximum supported APs: 1,024 (via the optional purchase of the 128-Access Point E-LTU)
 Maximum supported users: 20,000
 Maximum supported users via local portal authentication: 4,000
 Maximum supported users via local authentication: 1,000
 Maximum supported configured SSIDs: 512
 Maximum supported ACLs: 32,000
 Supported MSM APs are automatically discovered, Comware firmware is loaded, and the APs can be fully managed.

Services

Refer to the HP website at: www.hp.com/networking/services for details on the service-level descriptions and product numbers. For details about services and response times in your area, please contact your local HP sales office.

Standards and protocols

General protocols

RFC 768 UDP
 RFC 791 IP
 RFC 792 ICMP
 RFC 793 TCP
 RFC 826 ARP
 RFC 854 TELNET
 RFC 855 Telnet Option Specification
 RFC 858 Telnet Suppress Go Ahead Option
 RFC 894 IP over Ethernet
 RFC 950 Internet Standard Subnetting Procedure
 RFC 959 File Transfer Protocol (FTP)
 RFC 1122 Host Requirements
 RFC 1141 Incremental updating of the Internet checksum
 RFC 1144 Compressing TCP/IP headers for low-speed serial links
 RFC 1256 ICMP Router Discovery Protocol (IRDP)
 RFC 1321 The MD5 Message-Digest Algorithm
 RFC 1334 PPP Authentication Protocols (PAP)
 RFC 1350 TFTP Protocol (revision 2)
 RFC 1812 IPv4 Routing
 RFC 1944 Benchmarking Methodology for Network Interconnect Devices
 RFC 1994 PPP Challenge Handshake Authentication Protocol (CHAP)
 RFC 2104 HMAC: Keyed-Hashing for Message Authentication
 RFC 2246 The TLS Protocol Version 1.0
 RFC 2284 EAP over LAN

RFC 2461 IPv6 Neighbor Discovery
 RFC 2462 IPv6 Stateless Address Auto-configuration
 RFC 2463 ICMPv6
 RFC 2464 Transmission of IPv6 over Ethernet Networks
 RFC 2465 Management Information Base for IP Version 6: Textual Conventions and General Group (partially support, only "IPv6 Interface Statistics table")
 RFC 2466, Management Information Base for IP Version 6 - ICMPv6
 RFC 2526 Reserved IPv6 Subnet Anycast Addresses
 RFC 2553 Basic Socket Interface Extensions for IPv6
 RFC 2563 ICMPv6
 RFC 2925 Definitions of Managed Objects for Remote Ping, Traceroute, and Lookup Operations (Ping only)
 RFC 3315 DHCPv6 (client and relay)
 RFC 3363 DNS support
 RFC 3484 Default Address Selection for IPv6
 RFC 3493 Basic Socket Interface Extensions for IPv6
 RFC 3513 IPv6 Addressing Architecture
 RFC 3542 Advanced Sockets API for IPv6
 RFC 3587 IPv6 Global Unicast Address Format
 RFC 3596 DNS Extension for IPv6
 RFC 4193, Unique Local IPv6 Unicast Addresses
 RFC 4443 ICMPv6
 RFC 4541 IGMP & MLD Snooping Switch
 RFC 4861 IPv6 Neighbor Discovery
 RFC 4862 IPv6 Stateless Address Auto-

IEEE 802.11i Medium Access Control (MAC) Security Enhancements
 IEEE 802.11n WLAN Enhancements for Higher Throughput
 Note: All of the above standards are now included in IEEE 802.11-2012

Network management

RFC 1155 Structure of Management Information
 RFC 1905 SNMPv2 Protocol Operations
 RFC 2573 SNMPv3 Applications
 RFC 2574 SNMPv3 User-based Security Model (USM)
 RFC 2575 VACM for SNMP
 SNMPv1/v2c

QoS/CoS

RFC 2474 DS Field in the IPv4 and IPv6 Headers
 RFC 2474 DSCP DiffServ
 RFC 2475 DiffServ Architecture
 RFC 3168 The Addition of Explicit Congestion Notification (ECN) to IP
 WiFi MultiMedia (WMM), IEEE 802.11e

Security

IEEE 802.1X Port Based Network Access Control
 RFC 3394 Advanced Encryption Standard (AES) Key Wrap Algorithm
 RFC 3579 RADIUS Support For Extensible Authentication Protocol (EAP) Access Control Lists (ACLs)
 Guest VLAN for 802.1x
 Secure Sockets Layer (SSL)
 SSHv2 Secure Shell
 Web Authentication

Accessory Product Details

RFC 2644 Directed Broadcast Control
 RFC 2864 The Inverted Stack Table
 Extension to the
 Interfaces Group MIB
 RFC 2866 RADIUS Accounting
 RFC 2869 RADIUS Extensions
 RFC 3268 Advanced Encryption Standard
 (AES)
 Ciphersuites for Transport Layer Security
 (TLS)
 RFC 3619 Ethernet Automatic Protection
 Switching
 (EAPS)

IP multicast

RFC 1112 IGMP
 RFC 2236 IGMPv2
 RFC 2934 Protocol Independent Multicast
 MIB for IPv4

IPv6

RFC 1350 TFTP
 RFC 1881 IPv6 Address Allocation
 Management
 RFC 1887 IPv6 Unicast Address Allocation
 Architecture
 RFC 1981 IPv6 Path MTU Discovery
 RFC 2292 Advanced Sockets API for IPv6
 RFC 2373 IPv6 Addressing Architecture
 RFC 2375 IPv6 Multicast Address
 Assignments
 RFC 2460 IPv6 Specification

configuration
 RFC 5095 Deprecation of Type 0 Routing
 Headers in IPv6

MIBs

RFC 1229 Interface MIB Extensions
 RFC 1643 Ethernet MIB
 RFC 1757 Remote Network Monitoring MIB
 RFC 2011 SNMPv2 MIB for IP
 RFC 2012 SNMPv2 MIB for TCP
 RFC 2013 SNMPv2 MIB for UDP
 RFC 2571 SNMP Framework MIB
 RFC 2572 SNMP-MPD MIB
 RFC 2613 SMON MIB
 RFC 2863 The Interfaces Group MIB
 RFC 2932IP (Multicast Routing MIB)
 RFC 2933 IGMP MIB

Mobility

IEEE 802.11a High Speed Physical Layer in
 the 5 GHz Band
 IEEE 802.11b Higher-Speed Physical Layer
 Extension in the 2.4 GHz Band
 IEEE 802.11d Global Harmonization
 IEEE 802.11e QoS enhancements
 IEEE 802.11g Further Higher Data Rate
 Extension in the 2.4 GHz Band
 IEEE 802.11h Dynamic Frequency
 Selection

WPA (Wi-Fi Protected Access)/WPA2

IKEv1

RFC 3748 - Extensible Authentication
 Protocol (EAP)

HP 7500 Access Controller Module (JD440A)

Ports	1 RJ-45 serial console port 1 RJ-45 out-of-band management port 2 USB 1.0 12 Mbps ports	
Physical characteristics	Dimensions	14.45(d) x 13.39(w) x 1.6(h) in. (36.7 x 34 x 4.06 cm) (1U height)
	Weight	7.28 lb. (3.3 kg)
Memory and processor	Processor	Eight core @ 950 MHz, 256 MB compact flash, 1 GB DDR2 DIMM
Performance	Switch fabric speed	20 Gbps
	MAC address table size	24000 entries
Environment	Operating temperature	32°F to 113°F (0°C to 45°C)
	Operating relative humidity	5% to 95%, noncondensing
	Nonoperating/Storage temperature	-40°F to 158°F (-40°C to 70°C)
	Nonoperating/Storage relative humidity	5% to 95%, noncondensing
Electrical characteristics	Maximum heat dissipation	273 BTU/hr (288.02 kJ/hr)
	Maximum power rating	80 W

Accessory Product Details

Safety	UL 60950-1; EN 60950-1; CAN/CSA-C22.2 No. 60950-1; Anatel; GOST; C-Tick; NOM; IEC 60950-1(with CB report)
Emissions	EN 55022; VCCI; ICES-003; AS/NZS CISPR 22; EN 300 386; FCC Part 15; EN 61000-3-2:2006; EN 61000-3-3:1995 +A1:2001+A2:2005; EMC Directive 2004/108/EC
Immunity	EN EN 61000-4-2:1995+A1:1998+A2:2001; EN 61000-4-3:2006; EN 61000-4-4:2004; EN 61000-4-5:2006; EN 61000-4-6: 1996 +A1:2001:A2:2007; EN 61000-4-8:2001; EN 61000-4-11:2004; EN 55024:1998+ A1:2001 + A2:2003
Management	IMC - Intelligent Management Center; command-line interface; Web browser; configuration menu; SNMP Manager; Telnet; HTTPS; RMON1; FTP; in-line and out-of-band; IEEE 802.3 Ethernet MIB; Ethernet Interface MIB
Features	A7500 ACM License system - The A7500 ACM is an access controller module for the HP A7500 series Ethernet switches. It supports 128 APs by default. After license upgrade, the access controller module can support up to 640 APs.
Notes	Max. number of users: 20K. Max. number of users that are supported by local authentication: 1K. Max. number of SSIDs that can be configured: 512. Max. number of users that are supported by local portal authentication: 4K. Number of ACLs: 32K.
Services	Refer to the HP website at: www.hp.com/networking/services for details on the service-level descriptions and product numbers. For details about services and response times in your area, please contact your local HP sales office.

Standards and protocols

General protocols

RFC 768 UDP
 RFC 791 IP
 RFC 792 ICMP
 RFC 793 TCP
 RFC 826 ARP
 RFC 854 TELNET
 RFC 855 Telnet Option Specification
 RFC 858 Telnet Suppress Go Ahead Option
 RFC 894 IP over Ethernet
 RFC 950 Internet Standard Subnetting Procedure
 RFC 959 File Transfer Protocol (FTP)
 RFC 1122 Host Requirements
 RFC 1141 Incremental updating of the Internet checksum
 RFC 1144 Compressing TCP/IP headers for low-speed serial links
 RFC 1256 ICMP Router Discovery Protocol (IRDP)
 RFC 1321 The MD5 Message-Digest Algorithm
 RFC 1334 PPP Authentication Protocols (PAP)
 RFC 1350 TFTP Protocol (revision 2)
 RFC 1812 IPv4 Routing
 RFC 1944 Benchmarking Methodology for Network Interconnect Devices
 RFC 1994 PPP Challenge Handshake Authentication Protocol (CHAP)
 RFC 2104 HMAC: Keyed-Hashing for Message Authentication
 RFC 2246 The TLS Protocol Version 1.0
 RFC 2284 EAP over LAN
 RFC 2644 Directed Broadcast Control
 RFC 2864 The Inverted Stack Table Extension to the

MIBs

RFC 1229 Interface MIB Extensions
 RFC 1643 Ethernet MIB
 RFC 1757 Remote Network Monitoring MIB
 RFC 2011 SNMPv2 MIB for IP
 RFC 2012 SNMPv2 MIB for TCP
 RFC 2013 SNMPv2 MIB for UDP
 RFC 2571 SNMP Framework MIB
 RFC 2572 SNMP-MPD MIB
 RFC 2613 SMON MIB
 RFC 2863 The Interfaces Group MIB
 RFC 2933 IGMP MIB

Mobility

IEEE 802.11a High Speed Physical Layer in the 5 GHz Band
 IEEE 802.11b Higher-Speed Physical Layer Extension in the 2.4 GHz Band
 IEEE 802.11d Global Harmonization
 IEEE 802.11g Further Higher Data Rate Extension in the 2.4 GHz Band
 IEEE 802.11i Medium Access Control (MAC) Security Enhancements
 IEEE 802.11n WLAN Enhancements for Higher Throughput

Network management

RFC 1155 Structure of Management Information
 RFC 1905 SNMPv2 Protocol Operations
 RFC 2573 SNMPv3 Applications
 RFC 2574 SNMPv3 User-based Security Model (USM)
 RFC 2575 VACM for SNMP

Accessory Product Details

Interfaces Group MIB
 RFC 2866 RADIUS Accounting
 RFC 2869 RADIUS Extensions
 RFC 3268 Advanced Encryption Standard (AES)
 Ciphersuites for Transport Layer Security (TLS)
 RFC 3619 Ethernet Automatic Protection Switching (EAPS)

IP multicast

RFC 1112 IGMP
 RFC 2236 IGMPv2
 RFC 2934 Protocol Independent Multicast MIB for IPv4

IPv6

RFC 1350 TFTP
 RFC 1881 IPv6 Address Allocation Management
 RFC 1887 IPv6 Unicast Address Allocation Architecture
 RFC 1981 IPv6 Path MTU Discovery
 RFC 2292 Advanced Sockets API for IPv6
 RFC 2373 IPv6 Addressing Architecture
 RFC 2375 IPv6 Multicast Address Assignments
 RFC 2460 IPv6 Specification
 RFC 2461 IPv6 Neighbor Discovery
 RFC 2462 IPv6 Stateless Address Auto-configuration
 RFC 2463 ICMPv6
 RFC 2464 Transmission of IPv6 over Ethernet Networks
 RFC 2526 Reserved IPv6 Subnet Anycast Addresses
 RFC 2563 ICMPv6
 RFC 2925 Definitions of Managed Objects for Remote Ping, Traceroute, and Lookup Operations (Ping only)
 RFC 3484 Default Address Selection for IPv6
 RFC 3587 IPv6 Global Unicast Address Format
 RFC 4443 ICMPv6
 RFC 4541 IGMP & MLD Snooping Switch
 RFC 4861 IPv6 Neighbor Discovery
 RFC 4862 IPv6 Stateless Address Auto-configuration
 RFC 5095 Deprecation of Type 0 Routing Headers in IPv6

SNMPv1/v2c

QoS/CoS

RFC 2474 DS Field in the IPv4 and IPv6 Headers
 RFC 2474 DSCP DiffServ
 RFC 2475 DiffServ Architecture
 RFC 3168 The Addition of Explicit Congestion Notification (ECN) to IP
 WiFi MultiMedia (WMM), IEEE 802.11e

Security

IEEE 802.1X Port Based Network Access Control
 RFC 3394 Advanced Encryption Standard (AES) Key Wrap Algorithm
 RFC 3579 RADIUS Support For Extensible Authentication Protocol (EAP)
 Access Control Lists (ACLs)
 Guest VLAN for 802.1x
 Secure Sockets Layer (SSL)
 SSHv1.5 Secure Shell
 SSHv2 Secure Shell
 Web Authentication
 WPA (Wi-Fi Protected Access)/WPA2

IKEv1

RFC 3748 - Extensible Authentication Protocol (EAP)

HP TippingPoint S1200N IPS A7500 Module (JC527A)

Ports	2 SFP 1000 Mbps ports 2 RJ-45 1000 Mbps ports 1 Compact Flash port 1 RJ-45 serial console port (IEEE 802.3 Type 10BASE-T, IEEE 802.3u Type 100BASE-TX, IEEE 802.3ab Type 1000BASE-T) Duplex: 10BASE-T/100BASE-TX: half or full; 1000BASE-T: full only
Physical characteristics	Dimensions 13.7(d) x 15.7(w) x 1.6(h) in. (34.8 x 39.88 x 4.06 cm)
	Weight 7.7 lb. (3.49 kg), Fully loaded
Electrical characteristics	Throughput up to 1.3 Gbps

Accessory Product Details

Environment	IPS/IDS throughput	1.3 Gbps inspected throughput
	Concurrent sessions	6,500,000
	New sessions/second	78K
	Operating temperature	32°F to 113°F (0°C to 45°C)
	Operating relative humidity	10% to 95%, noncondensing
	Nonoperating/Storage temperature	-20°F to 45°F (-28.9°C to 7.2°C)
Services	Refer to the HP website at: www.hp.com/networking/services for details on the service-level descriptions and product numbers. For details about services and response times in your area, please contact your local HP sales office.	
Standards and protocols	Denial of service protection	Automatic filtering of well-known denial-of-service packets Rate Limiting by ACLs
	IPv6	RFC 2460 IPv6 Specification

HP 7500 384Gbps Fabric Module with 2 XFP Ports (JD193B)	Ports	1 RJ-45 dual-personality port; One console port, used for local or remote configuration and management 1 RJ-45 autosensing 10/100 port (IEEE 802.3 Type 10BASE-T, IEEE 802.3u Type 100BASE-TX); Duplex: half or full 1 Compact Flash port 2 XFP 10-GbE ports; Duplex: full only
	Physical characteristics	Dimensions 13.98(d) x 14.84(w) x 1.77(h) in. (35.5 x 37.7 x 4.5 cm) Weight 7.94 lb. (3.6 kg)
	Services	Refer to the HP website at www.hp.com/networking/services for details on the service-level descriptions and product numbers. For details about services and response times in your area, please contact your local HP sales office.

HP 7500 384Gbps Fabric Module (JD194B)	Ports	1 RJ-45 dual-personality port; One console port, used for local or remote configuration and management 1 RJ-45 autosensing 10/100 port (IEEE 802.3 Type 10BASE-T, IEEE 802.3u Type 100BASE-TX); Duplex: half or full 1 Compact Flash port
	Physical characteristics	Dimensions 13.98(d) x 14.84(w) x 1.77(h) in. (35.5 x 37.7 x 4.5 cm) Weight 7.94 lb. (3.6 kg)
	Services	Refer to the HP website at www.hp.com/networking/services for details on the service-level descriptions and product numbers. For details about services and response times in your area, please contact your local HP sales office.

HP 7500 384Gbps Advanced Fabric Module (JD195A)	Ports	1 RJ-45 dual-personality port; One console port, used for local or remote configuration and management 1 RJ-45 autosensing 10/100 port (IEEE 802.3 Type 10BASE-T, IEEE 802.3u Type 100BASE-TX); Duplex: half or full 1 Compact Flash port
	Physical characteristics	Dimensions 13.98(d) x 14.84(w) x 1.77(h) in. (35.5 x 37.7 x 4.5 cm)

Accessory Product Details

	Weight	7.94 lb. (3.6 kg)
Services	Refer to the HP website at www.hp.com/networking/services for details on the service-level descriptions and product numbers. For details about services and response times in your area, please contact your local HP sales office.	
HP 7500 768Gbps Fabric Module (JD220A)	Ports	1 RJ-45 dual-personality port; One console port, used for local or remote configuration and management 1 RJ-45 autosensing 10/100 port (IEEE 802.3 Type 10BASE-T, IEEE 802.3u Type 100BASE-TX); Duplex: half or full 1 Compact Flash port
	Physical characteristics	Dimensions 13.98(d) x 14.84(w) x 1.77(h) in. (35.5 x 37.7 x 4.5 cm)
	Weight	7.85 lb. (3.56 kg)
Services	Refer to the HP website at www.hp.com/networking/services for details on the service-level descriptions and product numbers. For details about services and response times in your area, please contact your local HP sales office.	
HP 7500 1400W DC Power Supply (JD208A)	Physical characteristics	Dimensions 7.72(w) x 14.06(d) x 5.04(h) in (19.6 x 35.7 x 12.8 cm) (3U height)
	Weight	20.39 lb (9.25 kg)
	Electrical characteristics	Voltage 0~-48/-60V Current 0/50 A Idle power 168 W Maximum power rating 1400 W PoE power 140 W
	Notes	Idle power is the actual power consumption of the device with no ports connected. Maximum power rating and maximum heat dissipation are the worst-case theoretical maximum numbers provided for planning the infrastructure with fully loaded PoE (if equipped), 100% traffic, all ports plugged in, and all modules populated.
Services	Refer to the HP website at www.hp.com/networking/services for details on the service-level descriptions and product numbers. For details about services and response times in your area, please contact your local HP sales office.	
HP 7500 1400W AC Power Supply (JD218A)	Physical characteristics	Dimensions 7.72(w) x 14.06(d) x 5.04(h) in (19.6 x 35.7 x 12.8 cm) (3U height)
	Weight	14 lb (6.35 kg)
	Electrical characteristics	Voltage 100-120/200-240 VAC Current 0/16 A Idle power 196 W Maximum power rating 1400 W PoE power 0 W Frequency 50/60 Hz
	Notes	Idle power is the actual power consumption of

Accessory Product Details

the device with no ports connected. Maximum power rating and maximum heat dissipation are the worst-case theoretical maximum numbers provided for planning the infrastructure with fully loaded PoE (if equipped), 100% traffic, all ports plugged in, and all modules populated. 1400W AC Power Supply uses a 16-A AC power cable

Notes	US order needs to indicate either #ABA option (for 110V) or #B2E (for 220V). This will determine which power cord the distribution centres include with the product.
Services	Refer to the HP website at www.hp.com/networking/services for details on the service-level descriptions and product numbers. For details about services and response times in your area, please contact your local HP sales office.

HP 7500 6000W AC Power Supply (JD227A)	Physical characteristics	Dimensions	7.72(w) x 14.06(d) x 5.04(h) in (19.6 x 35.7 x 12.8 cm) (3U height)
		Weight	28.22 lb (12.8 kg)
	Electrical characteristics	Voltage	100-120/200-240 VAC
		Current	0/16 A
		Idle power	105 W
		Maximum power rating	6000 W
		PoE power	5300 W
		Frequency	50/60 Hz
		Notes	Idle power is the actual power consumption of the device with no ports connected. Maximum power rating and maximum heat dissipation are the worst-case theoretical maximum numbers provided for planning the infrastructure with fully loaded PoE (if equipped), 100% traffic, all ports plugged in, and all modules populated. 6000W AC Power Supply uses a 16-A AC power cable.
		Services	Refer to the HP website at www.hp.com/networking/services for details on the service-level descriptions and product numbers. For details about services and response times in your area, please contact your local HP sales office.

HP 7503 Fabric Module with 24 GbE Ports (JD222A)	Ports	1 RJ-45 dual-personality port; One console port, used for local or remote configuration and management 1 RJ-45 autosensing 10/100 port (IEEE 802.3 Type 10BASE-T, IEEE 802.3u Type 100BASE-TX); Duplex: half or full 16 SFP 100/1000 Mbps ports 8 dual-personality ports; Combo ports (RJ45 or SFP)
	Physical characteristics	Dimensions 14.84(w) x 13.98(d) x 1.77(h) in (37.7 x 35.5 x 4.5 cm)

Accessory Product Details

	Services	Weight	6.17 lb (2.8 kg)
		Refer to the HP website at www.hp.com/networking/services for details on the service-level descriptions and product numbers. For details about services and response times in your area, please contact your local HP sales office.	
HP 7503-S 144 Gbps Fabric / Main Processing Unit with PoE-upgradable 20p Gig-T / 4p GbE Combo (JC666A)	Ports	<p>1 RJ-45 serial console port; One console port, used for local or remote configuration and management of the switch through a dialup connection</p> <p>1 RJ-45 autosensing 10/100 port (IEEE 802.3 Type 10BASE-T, IEEE 802.3u Type 100BASE-TX); Duplex: half or full</p> <p>20 RJ-45 auto-negotiating 10/100/1000 PoE ports (IEEE 802.3 Type 10BASE-T, IEEE 802.3u Type 100BASE-TX, IEEE 802.3ab Type 1000BASE-T, IEEE 802.3af PoE); Duplex: 10BASE-T/100BASE-TX: half or full; 1000BASE-T: full only</p> <p>4 dual-personality ports; each of which consists of a 10/100/1000Base-T port and an SFP port. The two ports comprising a Combo port cannot operate at the same time.</p>	
	Physical characteristics	Dimensions	13.98(w) x 14.84(d) x 1.77(h) in (35.51 x 37.69 x 4.5 cm)
		Weight	6.31 lb (2.86 kg)
	Services	Refer to the HP website at www.hp.com/networking/services for details on the service-level descriptions and product numbers. For details about services and response times in your area, please contact your local HP sales office.	
HP 7503-S 144 Gbps TAA Fabric/Main Processing Unit with 16 GbE SFP Ports and 8 GbE Combo Ports (JC698A)	Ports	<p>1 RJ-45 dual-personality port; One console port, used for local or remote configuration and management</p> <p>1 RJ-45 autosensing 10/100 port (IEEE 802.3 Type 10BASE-T, IEEE 802.3u Type 100BASE-TX); Duplex: half or full</p> <p>16 SFP 100/1000 Mbps ports</p> <p>8 dual-personality ports; Combo ports (RJ45 or SFP)</p>	
	Physical characteristics	Dimensions	13.98(d) x 14.84(w) x 1.77(h) in. (35.5 x 37.7 x 4.5 cm)
		Weight	6.17 lb. (2.8 kg)
	Services	Refer to the HP website at www.hp.com/networking/services for details on the service-level descriptions and product numbers. For details about services and response times in your area, please contact your local HP sales office.	
HP 7500 650W AC Power Supply (JD217A)	Physical characteristics	Dimensions	5.51(w) x 13.78(d) x 1.57(h) in (14 x 35 x 4 cm) (1U height)
		Weight	5.34 lb (2.42 kg)
	Electrical characteristics	Voltage	100-120/200-240 VAC
		Current	0/10 A
		Idle power	97.5 W
		Maximum power rating	650 W
		PoE power	0 W
		Frequency	50/60 Hz
		Notes	Idle power is the actual power consumption of the device with no ports connected. Maximum power rating and maximum heat

Accessory Product Details

dissipation are the worst-case theoretical maximum numbers provided for planning the infrastructure with fully loaded PoE (if equipped), 100% traffic, all ports plugged in, and all modules populated. 650W AC Power Supply uses a 10-A AC power cable

Services Refer to the HP website at www.hp.com/networking/services for details on the service-level descriptions and product numbers. For details about services and response times in your area, please contact your local HP sales office.

HP 7500 650W DC Power Supply (JD209A)	Physical characteristics	Dimensions	5.51(w) x 13.78(d) x 1.57(h) in (14 x 35 x 4 cm) (1U height)
		Weight	4.96 lb (2.25 kg)
	Electrical characteristics	Voltage	0~-48/-60V
		Current	0/25 A
		Idle power	97.5 W
		Maximum power rating	650 W
		PoE power	0 W
		Notes	Idle power is the actual power consumption of the device with no ports connected. Maximum power rating and maximum heat dissipation are the worst-case theoretical maximum numbers provided for planning the infrastructure with fully loaded PoE (if equipped), 100% traffic, all ports plugged in, and all modules populated.
		Services	Refer to the HP website at www.hp.com/networking/services for details on the service-level descriptions and product numbers. For details about services and response times in your area, please contact your local HP sales office.

HP 7502 300W AC Power Supply (JD226A)	Physical characteristics	Dimensions	5.51(w) x 13.78(d) x 1.57(h) in (14 x 35 x 4 cm) (1U height)
		Weight	4.17 lb (1.89 kg)
	Electrical characteristics	Voltage	100-120/200-240 VAC
		Current	0/5 A
		Idle power	54 W
		Maximum power rating	300 W
		PoE power	0 W
		Frequency	50/60 Hz
		Notes	Idle power is the actual power consumption of the device with no ports connected. Maximum power rating and maximum heat dissipation are the worst-case theoretical maximum numbers provided for planning the infrastructure with fully loaded PoE (if equipped), 100% traffic, all ports plugged in, and all modules populated. 300W AC Power Supply uses a 10-A AC power

Accessory Product Details

			cable
	Services	Refer to the HP website at www.hp.com/networking/services for details on the service-level descriptions and product numbers. For details about services and response times in your area, please contact your local HP sales office.	
HP 7502 Fabric Module (JD196A)	Ports	1 RJ-45 dual-personality port; One console port, used for local or remote configuration and management 1 RJ-45 autosensing 10/100 port (IEEE 802.3 Type 10BASE-T, IEEE 802.3u Type 100BASE-TX); Duplex: half or full 1 Compact Flash port	
	Physical characteristics	Dimensions	7.83(w) x 13.98(d) x 1.77(h) in (19.9 x 35.5 x 4.5 cm)
		Weight	2.98 lb. (1.35 kg)
	Services	Refer to the HP website at www.hp.com/networking/services for details on the service-level descriptions and product numbers. For details about services and response times in your area, please contact your local HP sales office.	
HP 7502 TAA-compliant Main Processing Unit (JC697A)	Ports	1 RJ-45 dual-personality port; One console port, used for local or remote configuration and management 1 RJ-45 autosensing 10/100 port (IEEE 802.3 Type 10BASE-T, IEEE 802.3u Type 100BASE-TX); Duplex: half or full 1 Compact Flash port	
	Physical characteristics	Dimensions	13.98(d) x 7.83(w) x 1.77(h) in. (35.5 x 19.9 x 4.5 cm)
		Weight	2.98 lb. (1.35 kg)
	Services	Refer to the HP website at: www.hp.com/networking/services for details on the service-level descriptions and product numbers. For details about services and response times in your area, please contact your local HP sales office.	
HP 7500 4-port 40GbE QSFP+ SC Module (JC792A)	Physical characteristics	Dimensions	10.08(w) x 11.73(d) x 1.57(h) in (25.6 x 29.8 x 4 cm)
		Weight	6.88 lb (3.12 kg)
	Services	Refer to the HP website at: www.hp.com/networking/services for details on the service-level descriptions and product numbers. For details about services and response times in your area, please contact your local HP sales office.	
HP 7500 4-port 40GbE CFP SC Module (JG373A)	Physical characteristics	Dimensions	16.77(w) x 11.73(d) x 1.57(h) in (42.6 x 29.8 x 4 cm)
		Weight	7.63 lb (3.46 kg)
	Services	Refer to the HP website at: www.hp.com/networking/services for details on the service-level descriptions and product numbers. For details about services and response times in your area, please contact your local HP sales office.	

Summary of Changes

Date	Version History	Action	Description of Change:
17-Feb-2015	From Version 35 to 36	Changed	SKUs descriptions and Configuration menu updated.
03-Jul-2014	From Version 34 to 35	Changed	Configuration menu updated.
10-Jun-2014	From Version 33 to 34	Changed	Switch Enclosure Options were updated in the Configuration section.
15-Apr-2014	From Version 30 to 33	Changed	Minor edit was made in Product Overview.
31-Mar-2014	From Version 29 to 30	Changed	Configuration Rules was revised throughout Configuration.
19-Mar-2014	From Version 28 to 29	Changed	Transceivers were revised in Configuration.
22-Nov-2013	From Version 27 to 28	Changed	Box Level Integration CTO Models, Rack Level Integration CTO Models, and Internal Power Supplies were revised in Configuration.
14-Oct-2013	From Version 26 to 27	Changed	Configuration was revised, including adding a new Transceiver.
30-Sep-2013	From Version 25 to 26	Changed	Configuration was revised. Features and Benefits was revised. Product overview was revised.
27-Sep-2013	From Version 24 to 25	Changed	Configuration was revised.
11-Sep-2013	From Version 23 to 24	Changed	Minor edit was made in Configuration.
19-Aug-2013	From Version 22 to 23	Changed	Box Level Integration CTO Models and Rack Level Integration CTO Models were revised in Configuration.
12-Jul-2013	From Version 21 to 22	Changed	Updated the Configuration Information.
19-Jun-2013	From Version 20 to 21	Changed	HP 10500/7500 20G Unified Wired-WLAN Module was added to Accessory Product Details Integration was revised in Features and Benefits
07-Jun-2013	From Version 19 to 20	Changed	Updated the Direct Attach Copper Cables in the Configuration Information section.
22-May-2013	From Version 18 to 19	Changed	Updated the Configuration Information.
12-Apr-2013	From Version 17 to 18	Removed	Completely removed Accessories section. Accessory Product Details: Removed several sections.
		Changed	Configuration: Completely updated Build To Order section.
19-Mar-2013	From Version 16 to 17	Changed	Corrected the new Configuration section.
01-Mar-2013	From Version 15 to 16	Changed	Corrected the formatting in the new Configuration section.
19-Feb-2013	From Version 13 to 15	Added	Added the Configuration section.
		Changed	Changes were made to Features and Benefits. The model

Summary of Changes

			specifications had minor updates, as did the Accessories section.
04-Dec-2012	From Version 12 to 13	Changed	Changes were made to Features and Benefits. The model specifications had minor updates, as did the Accessories section.
24-Sep-2012	From Version 11 to 12	Changed	Updated Features and Benefits, Introduction, the specifications, and Accessories.
	y 21, 2012- From Version 10 to 11	Changed	Updated the Standards and protocols section of Technical specifications.
	y 14, 2012- From Version 9 to 10	Changed	Features and Benefits, Accessories, and the weight and dimensions for each spec were revised.
02-Apr-2012	From Version 8 to 9	Changed	Part number was revised.
26-Mar-2012	From Version 7 to 8	Changed	Accessories were revised.
16-Nov-2011	From Version 6 to 7	Changed	Specifications were revised.
26-Sep-2011	From Version 5 to 6	Changed	Models, Features and Benefits and Accessories were revised.
07-Sep-2011	From Version 4 to 5	Added	Accessory Product Details was added.
07-Mar-2011	From Version 3 to 4	Changed	Accessories product descriptions and notes and services in Models were revised.
18-Feb-2011	From Version 2 to 3	Changed	Clarified in a couple of locations about the availability of IRF.
08-Oct-2010	From Version 1 to 2	Changed	Corrected the options section.

Summary of Changes

To learn more, visit: www.hp.com/networking

© Copyright 2015 Hewlett-Packard Development Company, L.P. The information contained herein is subject to change without notice. The only warranties for HP products and services are set forth in the express warranty statements accompanying such products and services. Nothing herein should be construed as constituting an additional warranty. HP shall not be liable for technical or editorial errors or omissions contained herein.